First Nations Water Rights in British Columbia

A Historical Summary of the rights of the Lillooet First Nation



DOC
BC
W324
D:F57L 566
1999
c.3

LEGISLATIVE LIBRARY

WATER BC our vital resource
Ministry of Environment, Lands and Parks

BRITISH COLUMBIA

LEGISLATIVE LIBRARY OF BRITISH COLUMBIA
3 3298 00228 5212

100-03390/

MINISTRY OF ENVIRONMENT, LANDS and PARKS
WATER MANAGEMENT BRANCH

FIRST NATIONS WATER RIGHTS IN BRITISH COLUMBIA:

A Historical Summary of the rights of the Lillooet First Nation

Research and writing by:	Diana Jolly
Edit by:	JOL Consulting
Review by:	Gary W. Robinson
Prepared for publication:	December, 1999

Canadian Cataloguing in Publication Data
Jolly, Diana.
First Nations water rights in British Columbia. A historical summary of the rights of the Lillooet First Nation

ISBN 0-7726-4058-0

1. Water rights - British Columbia - Kilchult Indian Reserve No. 3. 2. Water rights - British Columbia - Riley Creek Indian Reserve No. 1B. 3. Water rights - British Columbia - Lillooet Indian Reserve No. 1. 4. Water rights - British Columbia - McCartney's Flat Indian Reserve No. 4. 5. Water rights - British Columbia - Seton Lake Indian Reserve No. 5. 6. Water rights - British Columbia - Towinock Indian Reserve No. 2. 7. Lillooet Indians - British Columbia - Government relations. I. JOL Consulting. II. Robinson, Gary W. III. British Columbia. Water Management Branch. IV. Title. V. Title: Historical summary of the rights of the Lillooet First Nation.

KEB529.5.W3J646 1999 346.71104'32 C99-960381-7
KF8210.W38J646 1999

ACKNOWLEDGMENTS

The Ministry of Environment, Lands and Parks wishes to acknowledge three partners whose contributions were invaluable in the completion of the *Aboriginal Water Rights Report Series:*

The Ministry of Aboriginal Affairs, was a critical source of funding, support and direction for this project.

The U-Vic Geography Co-op Program, was instrumental in providing the staffing resources needed to undertake this challenging task. Through the services of June Whitmore and her office, the project benefited from the research, writing, editing and co-ordination of these outstanding students:

Jas Gill
Julie Steinhauer
Kelly Babcock
Daniella Mogus
Miranda Griffith
Christina Rocha
Rachel Abrams
Elizabeth Lee
Sara Cheevers

The services of Clover Point Cartographics Limited of Victoria, was responsible for the preparation of most of the map drawings, which form a valuable part of these documents.

In addition to these three key partners, I must acknowledge the valuable contributions of other Water Management staff, past and present, including Jack Farrell, Jim Mattison, Richard Penner, Diana Jolly, Greg Blaney, Gary Lucas and Kim Johnston.

The sheer numbers of First Nations groups' with histories of water rights made the completion of the Report Series seem, at times, prolonged. The determination, patience and vision of the partners was essential in the completion of the Series and is gratefully acknowledged.

Gary Robinson
Project Manager
Water Management Branch

TABLE OF CONTENTS

LOCATION 1

WATER ALLOCATIONS 3

HISTORY, CURRENT STATUS, AND NOTES: 3

KILCHULT #3 4
Kilchult Creek 4
History 4
Current Status 4
Notes 5

KILCHULT #3 & RILEY CREEK #1B 5
Riley Creek 5
History 5
Current Status 6
Notes 7

LILLOOET #1 7
History 7
Notes 7

Dickey Creek 8
History 8
Current Status 8
Notes 9

Rancherie & Tribal Springs & an unnamed spring 10
History 10
Current Status 12
Notes 12

Reservation Springs Numbers 1, 2 and 3 12
History 12
Current Status 13
Notes 14

Seton River 14
History 14
Current Status 14
Notes 15

Town Creek & Tyee Jimmie Creek 15
History 15
Current Status 18

Town Creek 18
Tyee Jimmie Creek 18
Notes 19

MCCARTNEY'S FLAT #4 20
Dew Brook 20
History 20
Current Status 20
Notes 20

McCartney & Brown Brook 20
History 20
Current Status 22
Notes 23

SETON LAKE #5 23
Seton Lake 23
History 23
Current Status 24
Notes 24

TOWINOCK #2 24
Means Brook 24
History 24
Current Status 25
Notes 25

Shata Creek 25
History 25
Notes 26

Towinock Creek 26
History 26
Current Status 27
Notes 28

OTHER INFORMATION 28
Additional Water Records 28
Alternate Water Sources 28
Groundwater 28
Municipal Water Supply 29

APPENDICES:

TAB NO.

1. TABLE: Summary of Water Rights Records for the Lillooet Band.

2. RECORD OF MINUTE OF DECISION (AGBC #590463).

3. ORDERS IN COUNCIL REGARDING THE LILLOOET BAND (AGBC 562 AND OIC 368/1908).

4. COPIES OF LICENCES AND PLATS (Conditional Water Licences 5289, 7163, 7167, 7172, 7371, 8326, 19208, 21993, 21994, 21995, 30654, 65098, 65664 and 65665. Final Water Licences 8115, 8160, 8162, 8163, 8293 and 9626). COPIES OF APPLICATIONS (Z 106882 & Z110916).

5. STREAM REGISTER REPORTS (Brown Brook, Dew Brook, Dickey Creek, Kilchult Creek, McCartney Brook, Means Brook, Rancherie Spring, Reservation Spring No. 1, Reservation Spring No. 2, Reservation Spring No. 3, Riley Creek, Seton Lake, Seton River, Towinock Creek, Town Creek, Tribal Spring and Tyee Jimmie Creek).

6. COPIES OF WATER SURVEY OF CANADA RECORDS (Dickey Creek, Riley Creek, Seton River and Town Creek).

7. COPY OF DATA SUMMARY OF GROUNDWATER RECORDS IN THE LILLOOET RESERVES AREA.

8. MAP: 1) Lillooet Band Reserves and area.
   i) Inset of portion of Lillooet #1

FIRST NATIONS WATER RIGHTS REPORT

BAND: Lillooet

ADDRESS: PO Box 615, Lillooet B.C., V0K 1V0

CHIEF: Yvonne Scotchman

PHONE: 256-4118 **FAX:** 256-4544

AFFILIATION: Lillooet Tribal Council

LOCATION:

The Lillooet Band occupies six separate reserves in the Coastal Mountains, near Lillooet.

The six reserves are:

- ¥ Kilchult 3 - this 42.1 hectare reserve is located along the west bank of the Fraser River, south of the town of Lillooet.
- ¥ Lillooet 1 and 1A - this 364.5 hectare reserve is located on the west side of the Fraser river and along the north bank of Seton River.
- ¥ McCartney's Flat 4 - this 171.4 hectare reserve is located along the east bank of the Fraser River, south of Lillooet.
- ¥ Riley Creek 1B - this 31.2 hectare reserve is located on the west bank of the Fraser River, directly south of Kilchult 3.
- ¥ Seton Lake 5 - this 1.4 hectare reserve is located along the east end of Seton Lake, west of Lillooet.
- ¥ Towinock 2 - this 90 hectare reserve is located on the west side of the Fraser River south of Kilchult 3 and Riley Creek 1B.

Within the Coastal Mountains, these reserves sit at elevations ranging from 700 feet, near the Fraser River, to 5,000 feet above mean sea level, and experience a climate ranging from an average daily temperature of -5 to -10 degrees centigrade in January to 20 degrees centigrade in July. The average annual rainfall for this area is 30 - 50 centimetres.

The most recent population figures from the Ministry of Finance show the Lillooet Band to have a population of 167 persons living on-reserve as registered members. It's total population, including registered and non-registered members living on reserve, on crown land and off reserve is 296.

Water courses of significance include:

- ¥ Brown Brook, which is located east of McCartney's Flat 4.
- ¥ Dew Brook, which is located in the southern portion of McCartney's Flat 4.
- ¥ Dickey Creek, which flows east, through the northern portion of Lillooet Reserve 1A, and drains into Fraser River.
- ¥ Kilchult Creek, which flows east, and drains into Fraser River.
- ¥ Means Brook, which is located northwest of Towinock 2, and flows in a northeast direction.
- ¥ McCartney Brook, which is located in McCartney's Flat 4, north of Dew Brook.
- ¥ Rancheric Spring, which is located in the southeastern portion of Lillooet 1.
- ¥ Reservation Springs No. 1, No. 2 and No. 3, which are located in the southeastern portion of Lillooet 1.
- ¥ Riley Creek, which flows northeast, through Riley Creek 1B, and flows into the Fraser River.
- ¥ Seton Lake, which is located west of Lillooet. The western border of Seton Lake 5 is along the lake.
- ¥ Towinock Creek, which flows northeast, through Towinock 2, and drains into the Fraser River.
- ¥ Town Creek, which flows southeast, through Lillooet 1, and flows into the Fraser River.
- ¥ Tribal Spring, which is located in the southern portion of Lillooet 1.
- ¥ Tyee Jimmie Creek, which flows north into Dickey Creek, and is located west of Lillooet 1.

WATER ALLOCATIONS:

Water Rights of the Lillooet Band have been recorded or affected by five actions of government over the years:

1) Allotments by the Indian Reserve Commissioners.

Following confederation, the Province and the Dominion established an Indian Reserve Commission to reserve lands for the Indians and for transfer of those lands to the Dominion. In setting apart lands for reserves, the Reserve Commissioners made it their practice to allot water with lands. It is understood that this practice was unique among Indian Reserves in Canada and the authority of the Commissioners to allot water rights has always been disputed by the Province.

2) Lieutenant Governor in Council approval by Order in Council of the granting of water rights.

3) Determinations of the Board of Investigation under the *Water Act, 1914* of claims of the Department of Indian Affairs, and subsequent issue of water licences.

4) Granting of water licences from Federal Government applications for licences for the use of water on reserve.

5) Actions to amend rights under licences pursuant to provisions in the *Water Act.*

HISTORY, CURRENT STATUS, AND NOTES:

The history of water rights, the current status of rights and notes for the Lillooet Band with respect to the water sources on Kilchult 3, Lillooet 1, McCartney's Flat 4, Riley Creek 1B, Seton Lake 5 and Towinock 2 are as follows:

KILCHULT #3

Kilchult Creek

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission, constituting the Lillooet Reserve, Kilchult 3.

> *'The water of a small stream* flowing through this reserve is set apart for use on this reserve.'*

*Note: The sketch accompanying this Minute of Decision shows a stream which appears to be in the same location as Kilchult Creek. Thus, it is assumed the unnamed stream referred to in the Minute of Decision is Kilchult Creek.

Dec 13, 1920 The Comptroller of Water Rights issued Conditional Water Licence 5289 to H. Graham, Indian Agent in accordance with his application. This licence was given a date of precedence of June 25, 1920, and authorized

the diversion of 158 acre feet of water a year from Kilchult Creek, for the irrigation of 52.6 acres of part of Lillooet Indian Reserve No. 3, provided that of this quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

June 30, 1932

The Comptroller of Water Rights issued Final Water Licence 8160 to the Superintendent-General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 5289, was given a date of precedence of June 25, 1920, and authorized the diversion of 34 acre feet of water a year from Kilchult Creek for the irrigation of 11.3 acres of part of Lillooet Indian Reserve No. 3, provided that of this quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

A lesser quantity was authorized with the issue of Final Water Licence 8160 as being sufficient for the area to be irrigated.

Current Status:

There are two active licences on Kilchult Creek.

Final Water Licence 8160, in the name of the Lillooet Band, is first in priority on Kilchult Creek. There is no recent information on file with respect to the exercise of rights under this licence.

The other licence on Kilchult Creek, which is not appurtenant to reserve land, authorizes the diversion of 500 gallons of water a day for domestic purpose.

Notes:

1. The allocation made by the Indian Reserve Commission could apply to Kilchult Creek.
2. Final Water Licence 8160 is first in priority on Kilchult Creek and this precedence is consistent with the allocation made by the Indian Reserve Commission.
3. The issue of Final Water Licence 8160 resulted in a loss of licensed rights on Kilchult Creek with respect to the Lillooet Band.

KILCHULT #3 & RILEY CREEK #1B

Riley Creek

History:

Jan 12, 1926 The Comptroller of Water Rights issued Conditional Water Licence 8326 to Harry Graham, Indian Agent, in trust for the Indians located on Lillooet Indian Reserves Nos. 1B and 3 in accordance with the Indian Agent's application. This licence was given a date of precedence of June 19, 1925, and authorized the diversion of 200 acre feet of water a year from Riley Creek for the irrigation of 67 acres of parts of Lillooet Indian Reserve No. 3 (Kilchult) and part of Lillooet Indian Reserve No. 1B (formerly Lot 3042, Group 1, Lillooet District), provided that of this quantity 1,000 gallons of water may be used throughout the year for domestic purpose.

May 16, 1932 The Comptroller of Water Rights issued Final Water Licence 8115 to the Superintendent General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 8326, was given a date of precedence of June 19, 1925, and authorized the diversion of 22.5 acre feet of water a year from Riley Creek for the irrigation of 7.5 acres of part of Lillooet Indian Reserve No. 1B (formerly Lot 3042, Group 1, Lillooet District), provided that 1,000 gallons of water a day may be used throughout the year for domestic purpose.

The Engineer's report for Final Water Licence 8115 stated that,

> *"no land is irrigated from Riley Creek on Lillooet Indian Reserve No. 3. The full area is not irrigated on Lillooet I.R. No. 1B..."*

Current Status:

There are a total of 53 licences and one application on Riley Creek. Of the licences:

- ¥ 46 authorize the diversion of water for irrigation purpose, for a total amount authorized of 883.8 acre feet per annum.
- ¥ seven authorize the diversion of water for domestic purpose, for a total amount authorized of 4,500 gallons of water a day.
- ¥ 1 authorizes the diversion of 1,000 gallons of water a day for incidental domestic purpose.

The one application on Riley Creek is for the right to divert 12.5 acre feet of water a year for irrigation purpose.

Final Water Licence 8115, which is 23rd in priority, is the only water licence on Riley Creek for

the benefit of the Lillooet Band. There is no recent information on file with respect to the exercise of rights under this licence.

Water Survey of Canada records show that a gauging station was operated from April to October at various times between 1914 and 1980 at Riley Creek near Lillooet (Station 08MF014). These records show a low mean monthly flow of 0.080 cubic metres per second in April, increasing to a high in June of 0.9 cubic metres per second.

Notes:

1. The issue of Final Water Licence 8115, in substitution of Conditional Water Licence 8326, resulted in a loss of the licensed volume of water authorized to the Band for irrigation purpose.

2. The issue of Final Water Licence 8115, in substitution of Conditional Water Licence 8326, resulted in the loss of the authorized use of water from Riley Creek on Kilchult #3.

LILLOOET #1

Historv:

Jan 9, 1891

By Order, the Lieutenant Governor-in-Council authorized that a grant of water rights be made in favour of the Lillooet Band for Lillooet 1.

"Twenty-five inches of water from a small stream running through that part of the Reserve situate near Cayoosh Creek."

"Twelve inches of water from a spring upon the flat at the village."

*Note: The identities of the stream and the spring are unknown.

*Note: The reference to an inch of water is understood to be a "miner's inch" of water. The *Water Act 1914* defined a miner's inch as being equal to a flow of .028 cubic feet per second. This rate of flow over a 120 day irrigation season would be 6.665 acre feet for each miner's inch.

Notes:

1. As the stream and the spring are unidentified, it is not known if allocations made under the *Water Act 1914,* have been made that are comparable to the allocation made by the Order in Council.

Dickey Creek

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission constituting Lillooet 1 Reserve,

> *"...the right to the unappropriated water of Waterfall Creek*, with power to divert the same to their land is reserved."*

*Note: The sketch accompanying the Minute of Decision shows Waterfall Creek in the same area Dickey Creek is now located, flowing in the same direction as Dickey Creek flows. Thus, Waterfall Creek may be the source that is now named Dickey Creek.

Dec 19, 1890 The Chief Commissioner of Lands and Works refused an application filed by Mr. Meason, Indian Agent for,

"the right to divert fifty inches of water from Dickey Creek to be diverted on the top of the mountain, and conveyed thence into Hoey Creek, and taken out again by the present ditch. The water to be conveyed in such manner that the water of Hoey Creek shall not be made muddy."*

*Note: There is no evidence of a Hoey Creek in the area. There is a Hoey Spring just outside the southeastern border of Lillooet 1 Reserve, near Town Creek. Thus, Hoey Creek may be what is now Town Creek.

The Chief Commissioner of Lands and Works stated that the application should not be allowed because,

> *"Dickey Creek is all recorded. Hoeys Creek is recorded three times over, and besides it is the only supply for the town of Lillooet."*

Current Status:

There are no licences on Dickey Creek for the benefit of the Lillooet Band.

There are a total of 15 licences and 1 application reported on Dickey Creek.

Of the licences:

- ¥ Three authorize the diversion of water for waterworks purpose, for a total quantity authorized of 496,400,000 gallons a year.
- ¥ Five authorize the diversion of water for irrigation purpose, for a total quantity authorized of 405.79 acre feet per annum.
- ¥ Ten authorize the diversion of water for domestic purpose, for a total quantity authorized of 6,500 gallons a day.
- ¥ One authorizes the diversion of 500 gallons of water a day for stock watering purpose.
- ¥ One authorizes the diversion of 4,500 gallons of water a day for industrial (garbage dump) purpose.

The one application on Dickey Creek is for the right to divert 500 gallons of water a day for domestic purpose.

Dickey Creek is shown on stream register reports as a fully recorded source for irrigation purposes, except short term use.

The most recent irrigation licence granted on Dickey Creek was given a date of precedence of May 24, 1966 and authorized the diversion of 180 acre feet of water a year.

Water Survey of Canada has reported streamflow records from gauging station 08ME012, Dickey Creek near Lilloet, for the months of April through to September from 1928 to 1931, 1962 and 1965 to 1966. These streamflow records reported a low mean monthly flow of 0.045 in April, increasing to a high in June of 0.168 cubic metres per second.

Notes:

1. The allocation made by the Indian Reserve Commission could apply to Dickey Creek. No allocations of water from Dickey Creek with respect to the Lillooet Band have been formally recognized by the Province.

2. Water Licences authorizing the diversion of water from Dickey Creek for irrigation purpose have been issued after the application made by the Indian Agent had been refused due to a shortage of water.

3. Dickey Creek is reported as a fully recorded source for irrigation purposes. Thus, it may be difficult to obtain irrigation rights on Dickey Creek in the future.

Rancherie & Tribal Springs & an unnamed spring

History:

June 2, 1908 By Order, the Lieutenant Governor-in-Council authorized that a grant of water rights be made in favour of the Lillooet Band for Lillooet 1.

> *"Water Record No. 59 dated May 18th, 1903, issued to Lillooet Indian Reservation for 100 inches of water out of three small springs* about four miles north of the town of Lillooet for use on Lillooet Reservation."*

* Note: It is assumed the three small springs referred to in the Order in Council are Rancherie and Tribal Springs and an unnamed spring, as these three springs were recognized under Board Order 2742 as recorded sources prior to March, 1909.

June 11, 1920 At a final hearing before the Board of Investigation, acting pursuant to the *Water Act 1914*, the Board determined that a valid water record affecting the claim of the Department of Indian Affairs to rights to the use of the waters of various springs on Lillooet Indian Reserve No. 1 was made under the authority of an Act passed prior to the 12th day of March, 1909. The Order of the Board, numbered 2742, set out that a conditional licence should be issued which would:

(i) provide for the diversion of water from springs on the Lillooet Indian Reserve No. 1,
(ii) take precedence from the 23rd day of February, 1891,
(iii) authorize the diversion of a maximum of 766.5 acre feet of water a year for the irrigation of 255.5 acres of Lillooet Indian Reserve No. 1, provided that 5,500 gallons of water a day throughout the year could also be used for domestic purpose.

Oct 22, 1923 The Comptroller of Water Rights issued Conditional Water Licence 7172 which embodied the terms and conditions set out in Board Order 2742.

Nov 15, 1932 The Comptroller of Water Rights issued Final Water Licence 8293 to the Superintendent-General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 7172, was given a date of precedence of February 23, 1891, and authorized the diversion of 30 acre feet of water a year from JJ and LL Springs for the irrigation of 9.9 acres of the southeast portion of Lillooet Indian Reserve No. 1, provided that of this quantity 2,000 gallons of water a day may be used throughout the year for domestic purpose.

A lesser quantity of water was authorized with the issue of Final Water Licence 8293 as being sufficient for the area to be irrigated.

The third unnamed spring authorized under Conditional Water Licence 7172 was not included in Final Water Licence 8293 as it could not be located. A different spring was found on the reserve; however, the water from this spring was not being used on reserve land and this spring was not included in Final Water Licence 8293.

Oct 1, 1949 The Deputy Comptroller of Water Rights issued Conditional Water Licence 19208 to the Director of Indian Affairs in accordance with an application filed by the same office. This licence was given a date of precedence of June 29, 1949, and authorized the diversion of 31.4 acre feet of water a year from Rancherie Spring for the irrigation of 10.4 acres of the southeast portion of Lillooet Indian Reserve No. 1, of which quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

Oct 9, 1953 The Deputy Comptroller of Water Rights issued an order amending Final Water Licence 8293. The sources of water supply authorized under the licence were named Rancherie (JJ) and Tribal (LL) Springs.

Jan 27, 1954 In accordance with an abandonment request filed by the Indian Commissioner for B.C., the Deputy Comptroller of Water Rights recorded Conditional Water Licence 19208 as abandoned. The Indian Commissioner abandoned Conditional Water Licence 19208 after receiving a letter from the Deputy Comptroller of Water Rights indicating that the licence was superfluous, as it was found that the use of water authorized under the licence was already covered under Final Water Licence 8293.

There is nothing on file to indicate the Lillooet Band was consulted with regards to the abandonment of Conditional Water Licence 19208.

Current Status:

Final Water Licence 8293, in the name of the Lillooet Band, is the only active licence on Rancherie Spring and Tribal Spring. There is no information on file with respect to the current exercise of rights under this licence.

Notes:

1. The quantity of water authorized under Conditional Water Licence 7172 was comparable with the amount of water allocated by the Order in Council.

2. The issue of Final Water Licence 8293, in substitution of Conditional Water Licence 7172, resulted in the reduction of the volume of water authorized for irrigation and incidental domestic purposes on Rancherie Spring and Tribal Spring for the Lillooet Band.

3. The issue of Final Water Licence 8293 resulted in the loss of licensed rights on an unnamed spring on the reserve.

4. There is no information on file to indicate that the Lillooet Band was consulted with regards to the abandonment of Conditional Water Licence 19208.

Reservation Springs Numbers 1, 2 and 3

History:

May 1, 1954 The Comptroller of Water Rights issued Conditional Water Licences 21994, 21995 and 21993 to the Director of Indian Affairs, in accordance with applications filed by the same office. All three licences were given a date of precedence of January 6, 1954.

(i) Conditional Water Licence 21994 authorized the diversion of 4.5 acre feet of water a year from Reservation Spring No. 1 for the irrigation of 1.5 acres of Indian Reserve No. 1, Lillooet.

(ii) Conditional Water Licence 21995 authorized the diversion of 9.6 acre feet of water a year from Reservation Spring No. 2 for the irrigation of 3.2 acres of Indian Reserve No. 1, Lillooet.

(iii) Conditional Water Licence 21993 authorized the diversion of 13.5 acre feet of water a year from Reservation Spring No. 3 for the irrigation of 4.5 acres of Indian Reserve No. 1, Lillooet.

The Director of Indian Affairs had also applied for the right to use the water from the springs for domestic purpose in addition to irrigation. A memo on file from the District Engineer indicated that,

"Conditional Licences for 4.5, 9.6 and 13.5 ac. ft. respectively are recommended. If it is found when the water is put to use, that is also used for domestic purposes, this can be taken from the irrigation allowance."

Current Status:

Conditional Water Licence 21994 is the only licence on Reservation Spring No. 1, Conditional Water Licence 21995 is the only licence on Reservation Spring No. 2 and Conditional Water Licence 21993 is the only licence on Reservation Spring No. 3.

There is no recent information on file with respect to the exercise of rights under these licences.

Notes:

1. There is no additional information with respect to the rights of the Lillooet Band on Reservation Springs Numbers 1, 2 and 3.

Seton River

History

Aug 6, 1993 The Water Management Branch received an application from lease holders, Ainsworth Lumber Company Limited, for the right to divert water from Seton River for fire protection purpose on land leased from the Lillooet Band (Lillooet Indian Reserve File 987/32-45-4, Parcel E, Lot 47, Lot 6, Lot 46 and Lot 2330.

Current Status

There are a total of seven licences and five applications on Seton River. Of the licences:

- one authorizes the diversion of 2,606,284 acre feet a year for power purpose.
- two authorize the diversion of water for irrigation purposes, for a total amount authorized of 181.5 acre feet per annum.
- two authorize the diversion of water for conservation purposes, for a total amount authorized of 50 cubic feet per second.
- one authorizes the diversion of 4,000 gallons of water a day for waterworks purpose.
- one authorizes the diversion of 730,000,000 gallons of water a year for local authority waterworks.

Of the applications:

- one is for the right to divert 2,000 gallons a day for public facilities purpose.

- one is for the right to divert 1,500,000 gallons of water a day for domestic purpose.
- one is for the right to divert water for fire prevention.
- two are for the right to divert water for conservation purposes.

There are no water licences for the benefit of the Lillooet Band on Seton River. There is one outstanding application, filed by a lease holder, for the right to use water on Lillooet 1. There is no recent information on file to indicate the current status of the application.

Water Survey of Canada reported streamflow records on Station 08ME003, Seton River near Lillooet, from 1914 to 1926 and from 1950 to 1990. These streamflow records reported a low mean monthly flow of 15.4 cubic metres per second in January, increasing to a high in June of 46.3 cubic metres per second.

Notes:

1. There is no additional information with respect to the water rights of the Lillooet Band on Seton River.

Town Creek & Tyee Jimmie Creek

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission, constituting Lillooet Reserve No. 1,

> *"The surplus water from the creek which supplies the town of Lillooet*..."*

* Note: Of the water licences the Village of Lillooet holds, three have a priority date earlier than August 31, 1881 (the date of the Minute of Decision), and all three licences authorize the diversion of water from Town Creek. Thus, it is assumed the unnamed creek referred to in the Minute of Decision is Town Creek.

June 11, 1920 At a final hearing before the Board of Investigation, acting pursuant to the *Water Act 1914*, the Board determined that a valid water record affecting the claim of the Department of Indian Affairs to rights to the use of the waters of Tyee Jimmie Creek was made under the authority of an Act passed prior to the 12th day of March, 1909. The Order of the Board, numbered 2748, set out that a conditional licence should be issued which would:

(i) provide for the diversion of water from Tyee Jimmie Creek (and rediverted from Town Creek)*,

(ii) take precedence from the 13th day of May, 1903,

(iii) authorize the diversion of a maximum of 766.5 acre feet of water a year for the irrigation of 255.5 acres of Lillooet Indian Reserve No. 1, provided that 5,500 gallons of water a day throughout the year could also be used for domestic purpose.

* Note: It should be noted that it was intended that the water be diverted from Tyee Jimmie Creek and carried by ditch, flume and pipe to the natural channel of Town Creek, from which the water would be rediverted for use on the reserve.

Jan 25, 1924 The Comptroller of Water Rights issued Conditional Water Licence 7371 which embodied the terms and conditions set out in Board Order 2748.

May 26, 1927 The Board of Investigation ordered that the plat accompanying Conditional Water Licence 7371 be amended. It was found that the plat attached to the licence was imperfect in that it did not show the upper and lower intakes on Town Creek or the ditch leading from them.

Mar 20, 1936 The Comptroller of Water Rights issued Final Water Licence 9626 to the Superintendent-General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 7371, was given a date of precedence of May 13, 1903, and authorized the diversion of 72.3 acre feet of water a year from Tyee Jimmie Creek (to be rediverted from Town Creek) for the irrigation of 24.1 acres of Lillooet Indian Reserve No. 1, Lillooet Land District, provided that of this quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

A lesser quantity of water was authorized with the issue of Final Water Licence 9626 as being sufficient for the area to be irrigated.

Feb 12, 1988 In accordance with an application for a change of purpose and works, the Regional Water Manager issued Conditional Water Licences 65664 and 65665 to the Lillooet Indian Band in substitution of Final Water Licence 9626.

(i) Conditional Water Licence 65664 was given a date of precedence of May 13, 1903, and authorized the diversion of 11,000 gallons of water a day for waterworks purpose and 57.53 acre feet of water a year from Tyee Jimmie Creek (to be rediverted at Town Creek) for the irrigation of 19.2 acres of Lillooet Indian Reserve No. 1, Lillooet District. The period of the year during which the water may be used is April 1st to September 30th.

(ii) Conditional Water Licence 65665 was given a date of precedence of June 8, 1987, and authorized the diversion of 11,000 gallons of water a day from Tyee Jimmie Creek (to be rediverted at Town

Creek) for waterworks purpose on Lillooet Indian Reserve No. 1, Lillooet District. The period of the year during which the water may be used is October 1st to March 31st.

Conditional Water Licence 65665 was given a date of precedence that coincided with the date that the application for the change of purpose was received. Conditional Water Licence 65665 was issued with this date of priority because Final Water Licence 9626 did not authorize the diversion of water from Tyee Jimmie Creek during the period from October 1st to March 31st. Thus, the issue of Conditional Water Licence 65665 did not give the Band prior rights to the creek during the period of term not previously licensed. A memo on file, regarding the change in priority date, does note that,

> *"There is no provision in the Act to alter a priority date except with the written consent of the licensee under Section 15 (4)."*

Feb 9, 1990 The Kamloops Regional Office received an application from the Lillooet Band to change the works authorized under Conditional Water Licences 65664 and 65665.

Current Status:

Town Creek

There are a total of four licences that authorize the diversion of water from Town Creek only. There are also three licences that authorize the diversion of water from Tyee Jimmie Creek to Town Creek and the water is then rediverted from Town Creek. These three licences will be accounted for under the current status for Tyee Jimmie Creek.

Of the four licences that authorize the diversion of water from Town Creek only:

- Three authorize the diversion of water for waterworks by a local authority purpose, for a total quantity authorized of 90,009,000 gallons of water a year.
- One authorizes the diversion of 500 gallons of water a day for domestic purpose and the diversion of 31.80 acre feet of water a year for irrigation purpose.

There are no water licences in the name of the Lillooet Band that authorize the sole diversion of water from Town Creek. The Band does hold Conditional Water Licences 65664 and 65665 which authorize the rediversion of water out of Town Creek.

Water Licensing stream records report no water shortages on Town Creek; however, a note on file, dated June 25, 1959, indicated that,

"Both Dickey and Town Creeks are not noted as fully recorded but known to be of short supply - Both sources of water for Village of Lillooet Waterworks."

The point of diversion and works authorized under the waterworks licences on Town Creek for the Village of Lillooet are located on Lillooet Reserve 1.

Water Survey of Canada reported streamflow records at Station No. 08ME013, Town Creek at Lillooet, for the months of April to September, from 1928 to 1931 and 1955 to 1963. These streamflow records reported a low mean monthly flow of 0.022 cubic metres per second in April, increasing to a high in June of 0.056 cubic metres per second.

Tyee Jimmie Creek

There are a total of three licences on Tyee Jimmie Creek. All three licences authorize the diversion of water from Tyee Jimmie Creek to Town Creek and the water is then rediverted from Town Creek. Of these licences:

- Two authorize the diversion of water for waterworks by others purpose, for a total amount authorized of 22,000 gallons a day.
- One authorizes the diversion of 73,000,000 gallons of water a year for waterworks by a local authority purpose.
- One authorizes the diversion of 57.53 acre feet of water a year for irrigation purpose.

Note: Some licences may be for more than one purpose.

Conditional Water Licence 65664 (first in priority) and Conditional Water Licence 65665 (third in priority) are the only two licences on Tyee Jimmie Creek for the benefit of the Lillooet Band. The most recent information on file regarding these licences is an outstanding application for a change of works, filed February 9, 1990. The current status of this application is unknown.

Water Survey of Canada has no streamflow records for Tyee Jimmie Creek and no recent information regarding streamflow can be located on our files.

Notes:

1. The allocation made by the Indian Reserve Commission could apply to Town Creek. If the allocation made by the Indian Reserve Commission is applied to Town Creek, then it should be noted that this allocation has not been formally recognized by the Province.

2. The issue of Final Water Licence 9626 in substitution of Conditional Water Licence 7371, resulted in a loss of licensed rights on Tyee Jimmie Creek with respect to the Lillooet Band.

3. Conditional Water Licence 65665 was given a later priority date than Final Water Licence 9626, due to the change in the period of the year the water was to be used.

4. The application for a change of works for Conditional Water Licences 65664 and 65665 is still outstanding.

5. The point of diversion and works authorized under the Village of Lillooet's waterworks licences are located on Lillooet 1.

MCCARTNEYÕS FLAT #4

Dew Brook

History:

Mar 1, 1966 The Comptroller of Water Rights issued Conditional Water Licence 30654 to the Director, Indian Affairs Branch in accordance with an application filed by the same Branch on behalf of a leaseholder. This licence was given a date of precedence of February, 1963, and authorized the diversion of 24 acre feet of water a year from Dew Brook for the irrigation of 8 acres of Indian Reserve No. 4, McCartney's Flat, Lillooet District.

Current Status:

Conditional Water Licence 30654 is the only water licence on Dew Creek. Information on file indicates that the water was to be used by a leaseholder at the time the licence was issued. However, current records show the licence in the name of the Lillooet Band. There is no information on file with respect to the exercise of rights under this licence.

Notes:

1. There is no additional information with respect to the water rights of the Lillooet Band on Dew Creek.

McCartney & Brown Brook

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission, constituting the Lillooet Band Reserve, McCartney Flat 4.

> *"The water of a small creek* flowing through this land was reserved by Mr. Sanders on 2nd April 1872, and is confirmed."*

* Note: The sketch accompanying this Minute of Decision shows a creek in the same vicinity as McCartney Brook. Thus, it is assumed the unnamed creek is McCartney Brook.

Jan 9, 1891 By Order, the Lieutenant Governor-in-Council authorized that a grant of water rights be made in favour of Lillooet Band on McCartney's Flat Reserve,

> *"Twenty-five inches of water from a spring situate one-half mile east* of the Reserve, at the foot of the mountain, to be conveyed, as at present, by a ditch and flume on to the Reserve."*

This spring may be Brown Brook, which is located east of McCartney's Flat 4.

June 4, 1908 By Order, the Lieutenant Governor-in Council authorized that a grant of water rights be made in favour of the Lillooet Band.

> *"Water Record No. 16 dated April 5th, 1899, issued to the Indian Reserve, McCartneys Flat below Lillooet, for 20 inches of water out of a small spring* adjoining the said Indian Reserve, for use on the Indian Reserve, McCartneys Flat."*

* Note: McCartney Brook was referred to in Board Order 2675 as a spring on the reserve. Thus, the small spring adjoining the reserve may be McCartney Brook.

June 11, 1920 At a final hearing before the Board of Investigation, acting pursuant to the *Water Act 1914*, the Board determined that a valid water record affecting

the claim of the Lillooet Band to rights to the use of the water from a spring on McCartneys Flat I.R. (No. 4 Lillooet) was made under the authority of an Act passed prior to the 12th day of March, 1909. The Order of the Board, numbered 2675, set our that a conditional licence should be issued which would:

(i) provide for the diversion of water from a spring on McCartneys Flat I.R. (No. 4 Lillooet) and a spring lying east of said Reserve,
(ii) take precedence from the 23rd day of February, 1891,
(iii) authorize the diversion of a maximum of 997.5 acre feet of water a year for the irrigation of 332.5 acres of McCartneys Flat I.R. (No. 4 Lillooet).

Oct 22, 1923 The Comptroller of Water Rights issued Conditional Water Licence 7163, which embodied the terms and conditions set out in Board Order 2675.

June 30, 1932 The Comptroller of Water Rights issued Final Water Licence 8162 to the Superintendent-General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 7163, was given a date of precedence of February 23, 1891 and authorized the diversion of 214 acre feet of water a year from McCartney Brook and Brown Brook for the irrigation of 71.2 acres of McCartneys Flat I.R. (No. 4 Lillooet), provided that of this quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

A lesser quantity of water was authorized with the issue of Final Water Licence 8162 as being sufficient for the area to be irrigated.

Current Status:

Final Water Licence 8162, in the name of the Lillooet Band, is first in priority on Brown Brook and McCartney Brook. There is no recent information on file to indicate the current exercise of rights under this licence.

Final Water Licence 8162 is the only licence on McCartney Brook and one of two licences on Brown Brook.

The third party licence on Brown Brook authorizes the diversion of 500 gallons of water a day for domestic purpose and 45 acre feet of water a year for irrigation purpose.

An application, filed November, 1970, for the right to divert water from Brown Brook was refused due to there being insufficient water in the brook to support additional licensing.

Water Survey of Canada has no streamflow records for Brown Brook or McCartney Brook.

Notes:

1. The allocation made by the Indian Reserve Commission could apply to McCartney Brook.

2. The water rights granted under Final Water Licence 8162 to the Lillooet Band, appear to be consistent with the decision of the Indian Reserve Commission.

3. The allocations made by the Orders in Council could apply to Brown Brook and McCartney Brook.

4. The quantity of water authorized under Conditional Water Licence 7163 was well above the amounts allocated by the Orders of the Lieutenant Governor in Council. However, the quantity of water authorized under Final Water Licence 8162, issued in substitution of Conditional Water Licence 7163, is less than the amount allocated by the Orders in Council.

5. An application has been refused due to insufficient water in Brown Brook; thus, it may be difficult to obtain additional water rights on this source.

SETON LAKE #5

Seton Lake

History:

Mar 20, 1992 The Regional Water Manager issued Conditional Water Licence 65098 to the Lillooet Band and the Department of Indian & Northern Affairs in accordance with their application. This licence was given a date of precedence of February 17, 1989, and authorized the diversion of 4,500 gallons of water a day from Seton Lake for waterworks purpose within Seton Lake Indian Reserve No. 5, Lillooet District.

The Department of Indian & Northern Affairs and the Lilloet Band had originally applied for the right to divert 20,000 gallons a day for waterworks purpose and 43,200 gallons a day for irrigation purpose; however, a lesser quantity was authorized with the issue of Conditional Water Licence 65098 as being sufficient.

The Lillooet Band did request that the quantity of water authorized under Conditional Water Licence 65098 be increased to support ten homes instead of six. However, no new construction had occurred and the Band Manager agreed to apply for additional rights when they were required.

Apr 11, 1995 Having determined that the requirement of water for irrigation purpose was erroneously calculated, the Assistant Regional Water Manager amended the quantity of water authorized under Conditional Water Licence 65098. The authorized quantity was amended to 6,500 gallons a day.

Current Status:

Conditional Water Licence 65098, in the name of the Lillooet Band, is the only active licence on Seton Lake. There is nothing on file with respect to the current exercise of rights under this licence.

Notes:

1. Conditional Water Licence 65098 authorizes a lesser quantity of water than what was originally applied for.

TOWINOCK #2

Means Brook

History:

Mar 8, 1996 The Kamloops Regional Water Management office received an application filed by an individual for the right to divert water from Means Brook for domestic purpose on Towinock Reserve Number 2.

Current Status:

There are a total of three licences and one application reported on Means Brook.

Of the licences:

- ¥ two authorize the diversion of water for domestic purpose, for a total quantity authorized of 1,500 gallons a day.
- ¥ two authorize the diversion of water for irrigation purpose, for a total quantity authorized of 39 acre feet per annum.

Note: some licences authorize more than one purpose.

The application for the right to use water from Means Brook on Towinock 2 is the only active

application on Means Brook.

Water Survey of Canada has no streamflow records for Means Brook.

Notes:

1. There is no additional information with respect to the water rights of the Lillooet Band on Means Brook.

Shata Creek

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission, constituting the Lillooet Reserve, Towinock Creek 2.

> *"50 inches is hereby reserved from Shata* Creek for the use of the Indians."*

* Note: Shata Creek is shown on the sketch accompanying the Minute of Decision as flowing northeast through the southeastern corner of Towinock 2. Current topographical maps do not show a Shata Creek near Towinock 2 and the Water Licensing maps have no indication of licensing on a creek near the area shown on the Minute of Decision sketch.

Notes:

1. No water rights have been granted by the Province which relate to the allocation made by the Indian Reserve Commission.

Towinock Creek

History:

Aug 31, 1881 Minute of Decision of the Indian Reserve Commission, constituting the Towinock Creek Reserve #2.

> *"100 inches of water from Towinock creek reserved on 12th September, 1876 is confirmed."*

June 11, 1920 At a final hearing before the Board of Investigation acting pursuant to the *Water Act, 1914,* the Board determined that a valid water record affecting the claim of the Department of Indian Affairs to rights to the use of the waters of Towinock Creek was made under the authority of an Act passed prior to the 12th day of March, 1909. The Order of the Board, numbered 2646, set out that a conditional water licence should be issued which would:

(i) provide for the diversion of water from Towinock Creek,
(ii) take precedence from the 12th day of September, 1870,
(iii) authorize the diversion of a maximum of 170.1 acre feet of water a year for the irrigation of 56.7 acres of Towinock I.R. (No. 2 Lillooet), provided that 1,000 gallons of water a day throughout the year could also be used for domestic purpose.

Oct 22, 1923 The Comptroller of Water Rights issued Conditional Water Licence 7167, which embodied the terms and conditions set out in Board Order 2646.

June 30, 1932 The Comptroller of Water Rights issued Final Water Licence 8163 to the Superintendent-General of Indian Affairs. This licence, issued in substitution of Conditional Water Licence 7167, was given a date of precedence of September 12, 1870, and authorized the diversion of 76.5 acre feet of water a year from Towinock Creek for the irrigation of 25.5 acres of part of Towinock Indian Reserve (No. 2 Lillooet), provided that of this quantity 1,000 gallons of water a day may be used throughout the year for domestic purpose.

A lesser quantity was authorized with the issue of Final Water Licence 8163, in substitution of Conditional Water Licence 7167, as being sufficient for the area to be irrigated.

Current Status:

There are a total of nine licences reported on Towinock Creek. Of these licences:

- Eight authorize the diversion of water for irrigation purpose, for a total quantity authorized of 320.7 acre feet per annum.
- One authorizes the diversion of 1,000 gallons of water a day for incidental domestic purpose.
- One authorizes the diversion of 1,000 gallons of water a day for domestic purpose.
- One authorizes the diversion of 3 cubic feet of water a second for commercial power purpose.

Note: Some licences authorize the diversion and use of water for more than one purpose.

Final Water Licence 8163, in the name of the Lillooet Band, is first in priority on Towinock Creek. There is no recent information on file with respect to the exercise of rights under this licence.

Water Survey of Canada has no records of streamflow on Towinock Creek. However, an Engineer's report, dated October 20, 1981, for a third party's licence indicated that the flow was estimated at approximately 15 cubic feet per second on April 29, 1980 and in excess of 50 cubic feet per second on July 22, 1981.

Notes:

1. Final Water Licence 8163 is first in priority on Towinock Creek. This precedence is consistent with the Indian Reserve Commission Minute of Decision.

2. The allocation made by the Indian Reserve Commission granted the diversion of a greater amount of water from Towinock Creek than the quantity formally recognized by the Province.

2. The issue of Final Water Licence 8162, in substitution of Conditional Water Licence 7167, resulted in the loss of licensed rights on Towinock Creek with respect to the Lillooet Band.

OTHER INFORMATION:

Additional Water Records:

Additional fishing rights were allocated in the Minute of Decision of the Indian Reserve Commission, dated August 31, 1881, with respect to the Lillooet Band.

> *"The exclusive right of salmon fishing on both sides of the Fraser River is reserved from the mouth of Cayoosh Creek upstream to 1/2 mile below Bridge River, a distance of about 4 miles."*
>
> *"Also on the left bank of Fraser River, from the mouth of Cayoosh Creek downstream, a distance of 3 miles."*
>
> *"Also, on both banks of Seton Creek, from Seton Lake downstream, 1/4 mile."*

Alternate Water Sources:

Groundwater:

Review of records of the Groundwater Section finds evidence of one well on Lillooet 1 and one well on McCartney's Flat 4. There is no groundwater information for the remainder of the Lillooet band's reserves. The amount of water which the well on McCartney's flat 4 yields is unknown. Further details regarding the wells on these two reserves are included in the attachments of this report. The extent to which these wells are utilized at this time is unknown and as provision of this information is voluntary, it can not be assumed to be complete.

Municipal Water Supply:

The proximity of Lillooet 1, McCartney's Flat 4 and Seton Lake 5 to Lillooet, north of the Reserves, presents the potential for water supply to these Reserves via a municipal water system.

The Village of Lillooet has licences to obtain water from Dickey Creek, Seton River, Town Creek and Tyee Jimmie Creek for waterworks purposes, with a total amount authorized of 966,009,000 gallons of water a year. In 1993 the Village of Lillooet experienced a peak daily demand of 102,000,000 gallons of water, well over their authorized maximum daily allowance under their licences; however, their annual demand is well within licensed rights.

At this time the potential for water supply from a municipality to the remainder of the Lillooet Reserves (Kilchult 3, Riley Creek 1B and Towinock 2) is limited as there are no municipal water systems in the proximity of these reserves.

Summary of Water Rights Record

Lillooet First Nation

Water Source	Priority Date	Reserve Name	File No.	Document Type	Status	Superceded By	Licence PUC/MOD & OIC Allotments	Comments
unnamed creek (may be Kilchult Creek)	1881/08/31	Kilchult #3	AGBC 590463	MOD			Water from unnamed stream	The allocation made byh the IRC could apply to Kilchult Creek.
Kilchult Creek	1920/06/25	Kilchult #3	0022720	C 5289	superceded	F 8160	158 AF/Irrigation 1,000 GD/Incidental Domestic	
Kilchult Creek	1920/06/25	Kilchult #3	0022720	F 8160	current		34 AF/Irrigation 1,000 GD/Incidental Domestic	F 8160 is consistent with the allocations made by the IRC. F 8160 resulted in a loss of licensed rights with respect to the Lilloet Band.
Riley Creek	1925/06/19	Kilchult #3	0061722	C 8326	superceded	F 8115	200 AF/Irrigation 1,000 GD/Incidental Domestic	
Riley Creek	1925/06/19	Riley Creek #1B	0061722	F 8115	current		22.50 AF/Irrigation 1,000 GD/Domestic	The issue of F 8115 resulted in the loss of the licensed volume of water authorized to the Band for irrigation purposes.
Waterfall Creek (may be Dickey Creek)	1881/08/31	Lillooet #1	AGBC 590463	MOD			unappropriated water of Waterfall Creek	IRC Allocations: Not formally recognized by the Province

Water Source	Priority Date	Reserve Name	File No.	Document Type	Status	Superceded By	Licence PUC/MOD & OIC Allotments	Comments
Dickey Creek Hoey Creek	1891/01/09	Lillooet #1	(AGBC 562)	OIC	Refused		50 inches converted equivalent=333.2AF	Water Licences authorizing the diversion of water from Dickey Creek for irrigation purpose hage been issued after the application made by the Indaian Agent had been refused due to a shortage of water.
unamed springs	1908/06/02	Lillooet #1	(OIC 368/1908)	OIC			100 inches converted equiavalent=666.4AF	
springs on the Reserve	1891/02/23	Lillooet #1	0002742	C 7172	superceded	F 8293	766.50 AF/Irrigation 5,500 GD/Incidental Domestic	
Rancherie Spring Tribal Spring	1891/02/23	Lillooet #1	0241104	F 8293	current		30 AF/Irrigation 2,000 GD/Incidental Domestic	The issue of F 8293 resulted in the loss of the licensed rights on an unnamed spring on the reserve.
Rancherie Springs	1949/06/29	Lillooet #1	0179485	C 19208	Abandoned		31.40 AF/Irrigation 1,000 GD/Domestic	There is no information on file to indicate that the Lilloet Band was consulted with regards to the abandonment of Conditional Water Licence 19208.
Reservation Spring #1	1954/01/06	Lillooet #1	0202519	C 21994	current		4.50 AF/Irrigation	No additional information
Reservation Spring #2	1954/01/06	Lillooet #1	0202520	C 21995	current		9.60 AF/Irrigation	No additional information

Water Source	Priority Date	Reserve Name	File No.	Document Type	Status	Superceded By	Licence PUC/MOD & OIC Allotments	Comments
Reservation Spring #3	1954/01/06	Lillooet #1	0202521	C 21993	current		13.50 AF/Irrigation	No additional information
Seton River	1993/06/30	Lillooet #1	3002519	Z 106882	current		Industrial (fire protection)	No additional information
unnamed creek (may be Town Creek)	1881/08/31	Lillooet #1	AGBC 590463	MOD			surplus water	IRC Allocations: Not formally recognized by the Province
Tyee Jimmie Creek	1903/05/13	Lillooet #1	0002748	C 7371	superceded	F 9626	766.5 AF/Irrigation 5,500 GD/Incidental Domestic	
Tyee Jimmie Creek	1903/05/13	Lillooet #1	0241105	F 9626	superceded	C 65665 C 65664	72.30 AF/Irrigation 1,000 GD/Incidental Domestic	The issue of F 9626 resulted in a loss of licensed rights on Tyee Jimmie Creek.
Tyee Jimmie Creek	1903/05/13	Lillooet #1	0241105	C 65664	current		57.53 AF/Irrigation 11,000 GD/Waterworks	The application for a change of works for Conditional Water Licences 65664 and 65665 is still outstanding.
Tyee Jimmie Creek	1987/06/08	Lillooet #1	0241105	C 65665	current		11,000 GD/Waterworks	Conditional Water Licence 65665 was given a later priority date than Final Water Licence 9626, due to the change in the period of the year the water was to be used.
unnamed stream unnamed spring	1891/01/09	Lillooet #1	AGBC 562	OIC			25 inches from unnamed stream 12 inches from unnamed spring	

Water Source	Priority Date	Reserve Name	File No.	Document Type	Status	Superceded By	Licence PUC/MOD & OIC Allotments	Comments
Dew Brook	1963/02/28	McCartney's Flat #4	0248443	C 30654	current		24.00 AF/Irrigation	No additional information
unnamed creek (may be McCartney Brook)	1881/08/31	McCartney's Flat #4		MOD			All water (AGBC 590463)	The allocation made by the IRC would apply to McCartney Brook.
unnamed spring (may be McCartney Brook)	1908/06/04	McCartney's Flat #4		OIC			Confirmation of Water Record No. 15, Apr 5, 1899, 20 inches (OIC 368/1908)	The allocations made by the Order in Council could apply to Brown Brook and McCartney Brook.
springs on the reserve	1891/02/23	McCartney's Flat #4	0002675	C 7163	superceded	F 8162	997.50 AF/Irrigation 1,000 GD/Incidental Domestic	
McCartney Brook Brown Brook	1891/02/23	McCartney's Flat #4	0241101	F 8162	current		214 AF/Irrigation 1,000 GD/Incidental Domestic	The quantity of water authorized under the Final Water Licence 8162 is less than the amount allocated by the Orders in Council.
unnamed spring (may be Brown Brook)	1891/01/09	McCartney's Flat #4	AGBC 562	OIC			25 inches	
Seton Lake	1989/02/17	Seton Lake #5	3001434	C 65098	current		4,500 GD/Waterworks	Conditional Water Licence 65098 authorizes a lesser quantity of water than what was originally appplied for.
Means Brook	1996/03/08	Towinock Creek #2	3003114	Z 110916	current		500 GD/Domestic	No additional information

Water Source	Priority Date	Reserve Name	File No.	Document Type	Status	Superceded By	Licence PUC/MOD & OIC Allotments	Comments
Shata Creek	1881/08/31	Towinock Creek #2	AGBC 590463	MOD			"50 inches of water"(converted equivalent=333.2AF)	No water rights have been granted by the Province which relate to the allocation made by the Indian Reserve Commission.
Towinock Creek	1881/08/31	Towinock Creek #2		MOD			100 inches (AGBC 590463)	
Towinock Creek	1870/09/12	Towinock Creek #2	0002646	C 7167	superceded	F 8163	170.10 AF/Irrigation 1,000 GD/Incidental Domestic	
Towinock Creek	1870/09/12	Towinock Creek #2	0241110	F 8163	current		76.50 AF/Irrigation 1,000 GD/Incidental Domestic	The issue of F 8163 resulted in the loss of licensed rights on Towinock Creek.

Geo. A. Walkem

Grounds of Decision.

Lillooet Indians.

No. 1.

A Reserve of 920 acres, situated immediately to the West of the town of Lillooet.

Commencing at the South-western corner of Lot 1, Block IV, Lillooet suburban Lots, and running Northward along the Western boundary of the said Block to Lot 3, Block 1; thence following the North-eastern boundary of Lot 3 to its Northern corner; thence West 10 chains; thence North 20 chains; thence East to Lot 6, Block 1; thence Northward to the North-western corner of Lot 1, Block 1a; thence North 11 chains; thence West 36 chains; thence North 46 chains; thence West 31 chains; thence North 41 chains; thence West 41 chains; thence South 66 chains; thence East 20 chains; thence South 20 chains; thence East to a point due North of the bridge across Cayoosh creek; thence South to the said bridge; and thence following the left bank of Cayoosh creek to the place of commencement.

Lot 1, Block 1, being the property of Mr. H. Holbrook, is not included in the above reserve.

Water.

Lillooet Indians.

Water.

~~The surplus Water from the Reserves on the South side of Lillooet, about eight miles up the creek of that name, with power to divert the same to their Lands is reserved.~~

No 2.

The old Reserve of Fountain, situated on the right bank of Fraser river, about 6 miles below Lillooet, and containing 27 acres, is confirmed, with an addition of 163 acres.

Commencing at a post at the South-eastern corner of the old reserve; and running North 30 chains; thence West 20 chains; thence North 30 chains; thence West 26 chains; thence South 40 chains; thence East 16 chains; thence South 30 chains; thence East 30 chains; and thence North 10 chains to the place of commencement.

Water.

~~Five inches of Water from Fountain creek reserved on 2nd September 1876 is confirmed.~~

50 inches

Lillooet Indians.

Geo. A. Walkem

Water — Cont'd

~~30 chains above the mouth of Cheakamus creek on the Lillooet Indian Reserve~~

No 3.

Reserve of 86 acres, situated on the right bank of Fraser river, about 6 miles below Lillooet, and known as Kit-chult.

Commencing at a pine tree marked Indian Reserve, and running West 30 chains; thence North 30 chains; thence East to the Fraser river; and thence Southward along the right bank of the river to the place of Commencement.

Water.

~~The right of a certain stream flowing through this reserve is set apart for use on this reserve.~~

H. L.

Lillooet Indians.

No. 4.

The old Reserve of 160 acres, situated on the left bank of Fraser River, 2½ miles below the town of Lillooet, and known as St. Cartwright's flat, is confirmed, with an addition of 241 acres.

Commencing at a stake for the marked Indian Reserve, and running North 70 chains; thence West to the Fraser River; and thence down the left bank of the said River to the place of commencement.

Water.

~~The Water of a small creek flowing through this land was reserved by Mr Sanders on 2nd April 1872, and is confirmed~~

No. 5.

A Reserve of 80 acres, situated at the foot of Seton Lake.

Commencing at the old steamboat wharf, and following the left bank of Seton Creek for a distance of 20 chains; thence South 30 chains; thence West 40 chains; thence North to Seton Lake; and

Lillooet Indians.

Re. Utilization

No 5. Cont'd

and thence along the shore of the said lake to the place of commencement.

Fishery.

The exclusive right of salmon fishing on both sides of the Fraser River is reserved, from the mouth of Cayoosh creek up-stream to ½ mile below Pavilion Bridge river, a distance of about 4 miles

Also on the left bank of Fraser river, from the mouth of Cayoosh creek down stream, a distance of 3 miles.

Also, on both banks of Seton creek, from Seton Lake down stream, ½ mile.

Grave-yards.

A Grave-yard on the left bank of Fraser river, immediately opposite to Mr Teit's house is reserved.

Also a Grave-yard, situated on Lot 16, Block 2, Lillooet Suburban Lots, the property of Mr Richard Hoey.

J. C. Reilly
I.R.C.

Lillooet, B.C.
August 31st 1881


WATER FALL CREEK

No. 21

LILLOOET INDIANS.

SCALE 1 INCH = 20 CHAINS.

940 ACRES.

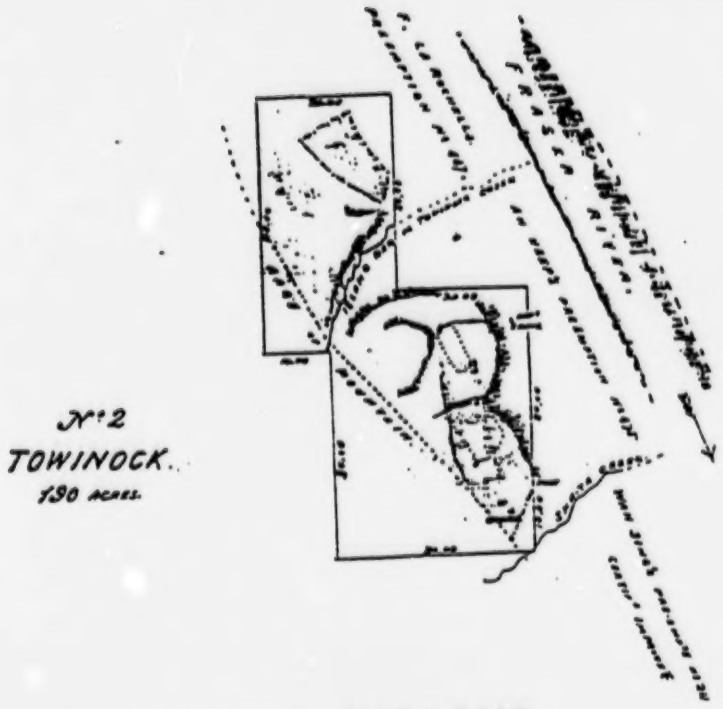

No 2
TOWINOCK.
190 Acres.

LILLOOET INDIANS.


SCALE 1 INCH = 20 CHAINS.




No 3
KIL-CHULT.
80 Acres.

Victoria
May 8th 1882.

Chief Comr of
Lands & Works.

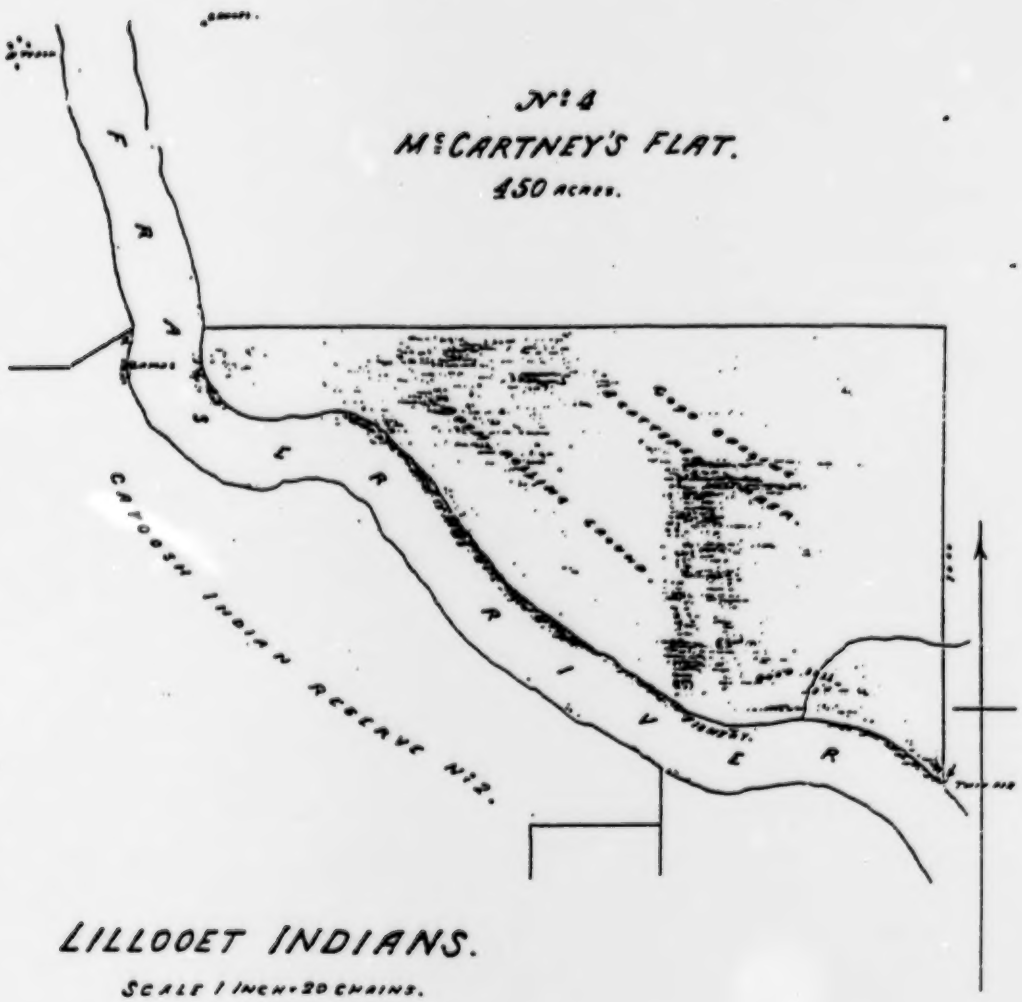

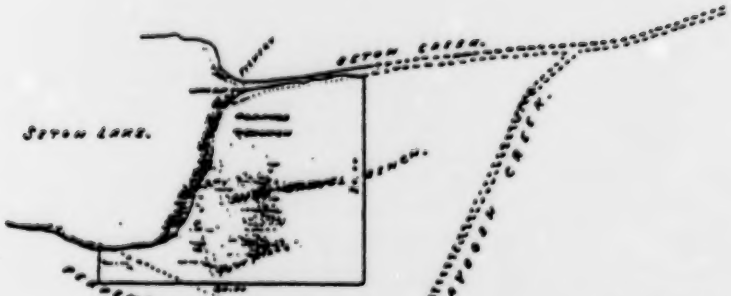

No 5. —
SETON LAKE.
80 ACRES.

Approved
E. A. Walker
Chief Comr of Lands & Works
Victoria
31st May 1881.

S

Hugh Nelson

Government House, Victoria,

9th January 1891.

On the recommendation of the Honourable the

Acting Chief Commissioner, of Lands and Works,

His Honour the Lieutenant-Governor, by and with the advice of the Executive Council, has been pleased to order, and it is hereby ordered, that the Assistant Commissioner of Lands and works for Lillooet District, be, and is hereby, authorized to grant the application of Mr William Laing Meason Indian Agent, for Water Records for the use of the Indians of the Williams Lake Indian Agency,

provided there be no adverse reasons against the issue of said Records.

Jno. Robson

Clerk, Executive Council.

Report and IPP to IPP dept returned to IPP dept 10/4/91

On a Memorandum from the Honourable the Acting Chief Commissioner of Lands & Works, dated 31st December 1890, enclosing a report from the Assistant Commissioner for Lillooet District upon the application of Mr Meason, Indian Agent, for various Water Records for the use of the Indians under his supervision.

And recommending that the Commissioner be authorized to grant the application for Water Records in those instances where no objection exists.

The Committee Advise approval

Chas. Poolay

President of Executive Council

Approved 9th January 1891

H. Cuyler Lowe

Lieutenant Governor

A 108

90

LANDS & WORKS DEPARTMENT
DEC 27 1890
VICTORIA, B. C.

GOVERNMENT OFFICE
DEC 19 1890
CLINTON, B. C.

31

June

1

Sir

I have honour to report that Mr. H. Lemon Indian Agent for this District, gave notice, in the Gov't Gazette of March 20th 1890. and also in the Kamloops 'Sentinel' of similar date, of his intention to apply to you for permission to divert and use for the purpose of irrigation on Indian Reserves in this District, certain lakes as set out in his notice of Application.

Mr Lemon now applies for a Record to be made of the various described applications.

The amount of water applied for, in each case, as a rule is very small and with few exceptions are not already claimed by white settlers.

For your reference I have annexed the original Copy of notice of intention, and my remarks on each application, and enclose same herewith, awaiting your instructions with regard Record.

I have the honour to be
Sir
Your obedient Servant
A. Vowell
Gov't Agent

The Hon. J. G. Turnor
Chief Commissioner of Lds. & Wks.
Victoria

2

Cariboo District.

[illegible] Reserve:

[illegible] inches of water from a small creek crossing the waggon road at the head of Rich Bar Reserve, to be conveyed on to said Reserve.

Alexandria Reserve:

No. 1.—One hundred inches of water from the [illegible] Creek, to be diverted on the top of the mountain, and conveyed on to the Reserve by a proposed ditch.

No. 2.—Twelve inches of water from a spring upon the Reserve, on the right bank of the Fraser River, and westerly west of the Hudson Bay's old Fort.

Deep Creek Reserve:

No. 1.—One hundred inches of water from Little [illegible] Creek, to be diverted at the present ditch-head, above the Mud Lake Road, and conveyed by the present ditch on to the Reserve.

No. 2.—Twelve inches of water from a spring upon a Reserve eight miles south of Soda Creek, on left bank of Fraser, to be used on said Reserve.

No. 3.—One hundred inches of water from the creek which crosses the waggon road at or near the 120-Mile post, to be diverted at a point above the road, and conveyed by a proposed ditch, about two miles [illegible] to the Deep Creek Reserve.

Tenny Reserve, Chilcotin:

No. 1.—One hundred inches of water from Elder Creek, to be diverted at a point at or near the west boundary of the Reserve.

No. 2.—Two hundred inches of water from Mackin Creek, to be diverted at a point near the head-waters of said Creek, about 18 miles from the Tenny Reserve, to be conveyed by a ditch and dry water courses into Elder Creek, and diverted again at same point as No. 1.

Soda Reserve, Chilcotin:

One hundred inches of water from the creek which bounds the Reserve on the west, to be diverted at the present ditch head.

Alexeen Reserve, Chilcotin:

No. 1.—Two hundred inches of water from Big Flat Creek, which flows through the Reserve.

No. 2.—One hundred inches of water from a creek which flows through the Reserve at the eastern end, about one mile from No. 1.

Lillooet District.

Kaiser Lake Reserve:

One hundred inches of water from a creek on the mountain bounding the Reserve on the north, to be diverted at the head of the present ditch.

Alkali Lake Reserve:

No. 1.—One hundred inches of water from Alkali Lake Creek, to be diverted at the present ditch head.

No. 2.—Fifty inches of water from a small creek running through the Reserve known as Joe Rosetti's Creek, to be diverted at the head of the ditch which now conveys said water on to the Reserve.

No. 3.—The right to construct a dam at the outlet of Harper's Lake, on Dog Creek Mountain, and the right to the water retained by said dam, to be conveyed by means of a ditch, already surveyed, to the Reserve known as Wycott Flat.

Dog Creek Reserve:

One hundred inches of water from Dog Creek, to be diverted at the heads of the two ditches now used.

Canoe Creek Reserve No. 2:

One hundred inches of water from a creek about five miles east of the Reserve, to be diverted at the head of the ditch now used.

Canoe Creek Reserve No. 1.

No. 1.—Two hundred inches of water from a stream formed by the overflow in Spring of Lakes, in the vicinity of R. Valentine's residence, and about 15 miles south-east from the Reserve, with the right to store said water in a chain of lakes, situate four miles west of Rocky Spring, and to tap said lakes in order to convey said 200 inches of water by a dry water course into Canoe Creek at the upper crossing, and to take the same quantity of water out of Canoe Creek by means of the present ditch on the Reserve.

No. 2.—Twenty inches of water from a small stream running through the Reserve at the village.

Rich Bar Reserve:

Twenty-five inches of water from a small stream flowing through the Reserve, to be conveyed by the present ditch.

Clinton Reserve:

No. 1.—Twenty-five inches of water from a small stream which runs through the Reserve at the 9-mile post, to be conveyed by the present ditch.

No. 2.—One hundred inches of water from Kelly Creek, to be diverted at a point 400 yards above the crossing of the Dog Creek and the Clinton waggon road, and to be conveyed by a proposed ditch on to the 9-Mile Dog Reserve.

Pavilion Reserve:

No. 1.—One hundred inches of water from Pavilion [illegible] to be diverted at the head of the present ditch, [illegible] by the same on to the Reserve.

Lillooet District

No objections to this record

This water already recorded by white settlers

This water already recorded by white settlers

No objection to this record

Fifty inches is sufficient

Subject to existing records

Subject to existing rights and records

Subject to existing records.

No objection to this record.

No objection to this record.

Subject to existing records

Subject to existing records

[illegible] surveyed by the present ditch to the Reserve, [illegible] of said creek.

[illegible] Reserve, to be surveyed by the present ditch on to the Reserve.

[illegible] Reserve:

No. 1.—One hundred inches of water from Yeomans Creek, to be diverted at the present ditch head.

No. 2.—The right to build a dam at the outlet of a lake, situate at the head of Fountain Creek, and at the south side of said creek, and to store the water of the creek in said lake in the spring and fall, when it is not [illegible] and runs to waste; the water thus stored to be conveyed by the creek to the present ditch head, and thence conveyed by said ditch on to the Reserve.

McLennan's Flat Reserve:

Twenty-five inches of water from a spring situate one-half mile east of the Reserve, at the foot of the mountain, to be conveyed, as at present, by a ditch and flume on to the Reserve.

Lillooet Reserve:

No. 1.—Twenty-five inches of water from a small stream running through that part of the Reserve situate near Cayoosh Creek.

No. 2.—Twelve inches of water from a spring upon the flat at the village.

No. 3.—Fifty inches of water from Dickey Creek, to be diverted on the top of the mountain, and conveyed thence into Hurry Creek, and taken entirely by the present ditch. The water to be conveyed in such manner that the water of Hurry Creek shall not be made muddy.

Cayoose Reserve:

No. 1.—One hundred inches of water from Cayoose Creek, to be conveyed by the present ditch on to the Reserve.

No. 2.—Twelve inches of water from a spring upon the upper flat of the Reserve.

Partridge's Reserve:

Twenty-five inches of water from a spring running through the Reserve.

Garden Flat Reserve:

Fifty inches of water from a creek running through the Reserve, to be conveyed by the present ditch.

Creack Reserve:

Fifty inches of water from the creek running through the Reserve, to be conveyed by the two present ditches.

Columbia Reserve:

No. 1.—One hundred inches of water from Hardy Creek, to be diverted at a point below the road, and conveyed by the present ditch on to the Reserve.

No. 2.—Fifty inches of water from a creek upon that part of the Reserve situate on the east bank of Fraser River, to be conveyed by the present ditch on to the Reserve.

Seton Lake Mission Reserve:

No. 1.—Twenty inches of water from a creek running through the Iguace Reserve.

No. 2.—Twelve inches of water from a spring on the small reserve on the south side of lake, nearly opposite No. 1.

No. 3.—Fifty inches of water from a creek on the Reserve, one mile west of Mission Village.

No. 4.—Twelve inches of water from a spring on north side of lake, on a small Reserve nearly opposite the Mission.

Schlaw Reserve

No. 1.—Twenty inches of water from a creek running through the Reserve, near the old village.

No. 2.—Twenty inches of water from a creek upon a high bench of the Reserve, and two miles east from No. 1.

No. 3.—One hundred inches of water from Portage River, which flows through the Reserve.

Necait Reserve

Fifty inches of water from a creek running through the Reserve.

Nequatqua Reserve

No. 1.—One hundred inches of water from Anderson River, which flows through the Reserve.

No. 2.—Twenty-five inches of water from a small creek running through a Reserve on the Portage Road, about three miles from head of Anderson Lake.

Bridge River Reserve:

No. 1.—Twenty-five inches of water from a small creek running through the Reserve, one mile north of the village on Fraser River.

No. 2.—Fifty inches of water from Big Creek, adjoining a Reserve on Fraser River about eight miles north of No. 1, to be conducted by a ditch under construction.

No. 3. Fifty inches of water from a creek upon the Reserve, and about three miles from the mouth of Bridge River, on the south bank.

No. 4.—Fifty inches of water from a creek upon the Reserve, on the south bank of Bridge River and about 2½ miles up the river from No. 3.

No. 5.—Fifty inches of water from Chaser's Creek, upon the Reserve, about six miles up the river from No. 4, and upon the south bank.

No. 6.—Ten inches of water from a spring upon the Reserve, about four miles from the mouth of Bridge River, and upon the north bank.

No. 7.—Fifty inches of water from a creek upon the Reserve, three miles from No. 6, up Bridge River, upon the north bank.

[illegible] except No. 7, are all utilized by means of [illegible] for irrigating the various portions of the [illegible] which are under cultivation.

WM. LAIDLAW MCLEAN.

No objection to the record.

No objection to the record.

The waters of this Creek are all recorded.

No objection to this right.

No objection to this record.

No objection to this record.

No objection to this Record.

This application should on no account be allowed. Dickey Creek is all recorded. Hurry Creek is recorded three times over, and besides it is the only supply for the town of Lillooet.

No objection to this record.

No objection to this record.

No objection to this record.

No objection to this record.

No objection to this record.

Not in Lillooet District

No objection to this record.

No objection to this Record.

No objection to this record.

No objection to this record.

No objection to any of the records on the Schlaw, Necait Nequatqua, and Bridge River Reserves

L. Sous
A.C. Lillooet
Lillooet District

4108/91

[illegible] inches of water from Leon's [illegible] conveyed by the present ditch to the land [illegible] side of said creek.

[illegible]—Twenty-five inches of water from a small [illegible] running through the Reserve on south side of [illegible] Creek, to be conveyed by the present ditch on [illegible] that part of the Reserve.

FOUNTAIN RESERVE:

No. 1.—One hundred inches of water from Fountain Creek, to be diverted at the present ditch head.

No. 2.—The right to build a dam at the outlet of a [illegible], situate at the head of Fountain Creek, and at [illegible] mile of said creek, and to store the water of the creek in said lake in the spring and fall, when it is [illegible] and runs to waste: the water thus stored to be conveyed by the creek to the present ditch head, and thence conveyed by said ditch on to the Reserve.

McCARTNEY'S FLAT RESERVE:

Twenty-five inches of water from a spring situate [illegible] half-mile east of the Reserve, at the foot of the mountain, to be conveyed, as at present, by a ditch [illegible] flume on to the Reserve.

LILLOOET RESERVE:

No. 1.—Twenty-five inches of water from a small stream running through that part of the Reserve situate near Cayoosh Creek.

No. 2.—Twelve inches of water from a spring upon the flat at the village.

No. 3.—Fifty inches of water from Dickey Creek, to be diverted on the top of the mountain, and conveyed thence into Hoey Creek, and taken out again by the present ditch. The water to be conveyed in such manner that the water of Hoey Creek shall not be made muddy.

CAYOOSE RESERVE:

No. 1.—One hundred inches of water from Cayoose Creek, to be conveyed by the present ditch on to the Reserve.

No. 2.—Twelve inches of water from a spring upon the upper flat of the Reserve.

PASHILQUA RESERVE:

Twenty-five inches of water from a spring running through the Reserve.

GARDEN FLAT RESERVE:

Fifty inches of water from a creek running through the Reserve, to be conveyed by the present ditch.

CHUACK RESERVE:

Fifty inches of water from the creek running through the Reserve, to be conveyed by the two present ditches.

COLCHOPA RESERVE:

No. 1.—One hundred inches of water from Hardy Creek, to be diverted at a point below the road, and conveyed by the present ditch on to the Reserve.

No. 2.—Fifty inches of water from a creek upon that part of the Reserve situate on the east bank of Fraser River, to be conveyed by the present ditch on to the Reserve.

SETON LAKE MISSION RESERVE:

No. 1.—Twenty inches of water from a creek running through the Ignace Reserve.

No. 2.—Twelve inches of water from a spring on

No objection to this
No objection to the
No objection to th
The waters of this Cr
No objection to this
No objection to this R
No objection to this R
No objection to this R
This application should on
Creek is all recorded. No
over, and besides it is the
No objection to this Re
No objection to this Re
No objections to this R
No objection to this Re
No objection to this Re
} Not in Lillooet
No objection to this Re
No objection to this Re

368.
1908.

Dated 4th June

ORDER IN COUNCIL

providing for

Confirmation of Water Records for certain Indian Reserves.

AGBC 676

At the Executive Council Chamber, Victoria, B. C.,

The 2nd: *day of* June, , *A. D. 190*8.

Present:

The Honourable

Mr. McBride. *in the Chair.*

Mr. Fulton.

Mr. Tatlow,

Mr. Young.

Mr.

On the recommendation of the Honourable

The Chief Commissioner of Lands and Works,

and under the provisions of _____ *Chapter* 190: R.S.

His Honour the Administrator *of British Columbia, by and with the advice of his Executive Council, doth order as follows:* that the Water Records referred to in the annexed Minute of Council be and are hereby ratified and confirmed and that certified copy of the said Minute be forwarded to the Assistant Commissioner of Lands and Works at Clinton (Lillooet) and to A. W. Vowell, Superintendent of Indian Affairs at Victoria, respectively.

A. Campbell Redgrave.

Deputy Clerk Executive Council.

APPROVED AND ORDERED THIS 2nd DAY OF June A.D. 190 8

Administrator

To His Honour
The ~~Lieutenant Governor~~ Administrator in Council

The undersigned has the honour to report for the con. Council:-

That the following Water Records have been issued by the Assistant Commissioner of Lands and Works at Clinton under the provisions of the Water Clauses Consolidation Act, without first having obtained the authority of the Lieutenant Governor in Council as provided by said Section.

Water Record No. 18 dated April 5th, 1909, issued to the Indian Reserve, McCartneys Flat below Lillooet, for 20 inches of water out of a small spring adjoining the said Indian Reserve, for use on the Indian Reserve, McCartneys Flat.

Water Record No. 20, dated August 24th, 1909, issued to Fountain Indian Reserve, Lorenzo Valley for 100 inches of water out of Mc-c-ris Creek, for use on Indian Reserve, Lorenzo Valley.

Water Record No. 26, dated January 6th, 1900, issued to Anderson Lake, Indian Reservation, for 100 inches of water from a small stream flowing from the mountain on the West side of Anderson Lake Reserve about a quarter of a mile from the head of the Lake for use on Anderson Lake, Indian Reservation.

Water Record No. 56, dated November 7th, 1902, issued to Bonaparte Indian Reservation No. 2, for 100 inches of water from Hat Creek for use on Bonaparte Indian Reservation No. 2.

Water Record No. 59 dated May 18th, 1903, issued to Lillooet Indian Reservation for 100 inches of water out of three small springs about four miles north of the town of Lillooet for use on Lillooet reservation.

Water Record No. 64 dated November, 3rd, 1903, issued to the High Bar Indians for 200 inches of water from Watson Bar Creek for use on the High Bar Indian Reservation.

Water Record No. 65 dated June 30th, 1904, issued to the Fountain Indians for 100 inches of water from Fountain Creek for use on the Fountain Indian Reserve.

Water Record No. 78 dated September 1st, 1905, issued to the Pavilion Band of Indians for 100 inches of water from a small stream running into a lake named on the Indian Map No. 3, in Marble Canyon, for use on Pavilion Indian Reserve No. 3.

Water Record No. 80 dated September 1st, 1905, issued to the Pavilion Band of Indians for 30 inches of water from a small stream on the Mountain side above a lake named on the Indian Map No. 3, in Marble Canyon for use on the Pavilion Indian Reserve No. 3.

AND TO RECOMMEND that the aforementioned Water Records be ratified and confirmed as from their respective dates of issue subject to such prior rights as existed and that certified ~~copies~~ copy of ~~this Minute~~ if approved be forwarded to the Assistant Commissioner of Lands and Works at Lillooet and to A. W. Vowell, Superintendent of Indian Affairs at Victoria, respectively.

Dated this 30th day of May, A.D. 1908.

Chief Commissioner of Lands and Works.

Approved this 2nd day of ~~May~~ June A. D. 1908.

Presiding Member of the Executive Council.

PROVINCE OF BRITISH COLUMBIA. WATER RIGHTS BRANCH. DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE
(IRRIGATION)

Appurtenant to 52.6 acres of Lillooet Indian Reserve No.3.

WHEREAS H. Graham, Indian Agent, whose post-office address is Lytton, B. C.

as owner or lawful occupant of the land hereinafter specified, has applied for a licence to take and use water in the manner hereinafter set out, and has taken all the preliminary steps required of such applicant under the "Water Act, 1914," prior to the issue of this licence, and is, under the said Act, entitled thereto:

(1.) Now, therefore, in pursuance of the said Act, this conditional licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(a.) The source of the water-supply is Kilchult Creek

a tributary of Fraser River.

(b.) The point of diversion from the stream is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(c.) The date from which this licence shall take precedence is 25 June, 1920.

(d.) The purpose for which the water is to be used is irrigation.

(e.) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (g) hereof are under irrigation is, until lawfully altered, 158 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. ——— from ——— (Stream.)

and Licence No. ——— from ——— (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data have been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum is 3 acre-feet per acre of land irrigated and an additional amount for reasonable seepage and evaporation.

And provided further that there may be used in addition 1000 gallons of water per day throughout the whole year for domestic purpose as being incidental to the irrigation purpose.

Surrendered by 8/60

Licence Number 5289

Form 1004, W.R.B. (Conditional Licence—Irrigation).—1,000-8-20.

5289

ORIGINAL.

(*f*.) The period of the year during which the water may be used is 1st April to 30th September.

(*g*.) The area and description of the irrigable lands to which this right may extend on completion of works and beneficial use of the water in the irrigation of the said lands are 52.6 acres, comprising part of Lillooet Indian Reserve No.3.

The extent and location of the said irrigable lands are further shown in the said exhibit "A."

(*h*.) The other terms and conditions respecting the right are:—

(1.) Works for the diversion and the carriage of the water as set forth in the exhibit marked "B" which is hereto attached and hereby made a part hereof shall be constructed in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(2.) The said construction shall be commenced on or before the first day of May, 19 21.

(3.) The said construction shall be prosecuted with due diligence and to the satisfaction of the Comptroller, and shall be completed on or before the thirtieth day of November, 1930.

(4.) The lands described in clause (*g*) hereof shall have been properly prepared for irrigation and shall have been irrigated beneficially from the said works on or before the thirtieth day of November, 1930.

(5.)

(*i*.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*j*.)

(2.) This licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part V. of the "Water Act, 1914," and shall be subject to all the provisions of said Act, including the filing of proof of the completion of the said works and the putting of the water to such beneficial use within the time limited by the provisions of section 117 of the said Act.

Issued this thirtieth day of December, 19 20.

File No. 022720.

E. H. Beasley

Comptroller of Water Rights.

Licence Number 5289

5289

ORIGINAL.

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

EXHIBIT "B."

(APPROVAL OF PLANS AND LIST OF WORKS TO BE CONSTRUCTED.)

The works which are accepted as necessary and suitable for the taking and (or) using of the water under the above-mentioned licence, and which are more fully set out in the plans and specifications filed in the office of the Comptroller of Water Rights numbered 124278 C.

as altered, amended, or limited by supplemental plans and specifications numbered Plan 1900 - 48

or in letters or other documents referred to as

which plans and specifications as thus altered, amended, or limited are hereby approved, are as follows:—

Ditch

File No. 022720.

Map No. 4501

By ...

G. A. Cleveland

Comptroller of Water Rights.

5289

Form 1005, W.R.B. (Approval of Plans)—2,000-11-20—(Forming part of Conditional Water Licence No.).

5289


ORIGINAL

British Columbia.

To accompany Conditional Licence No 3289 Precinct

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

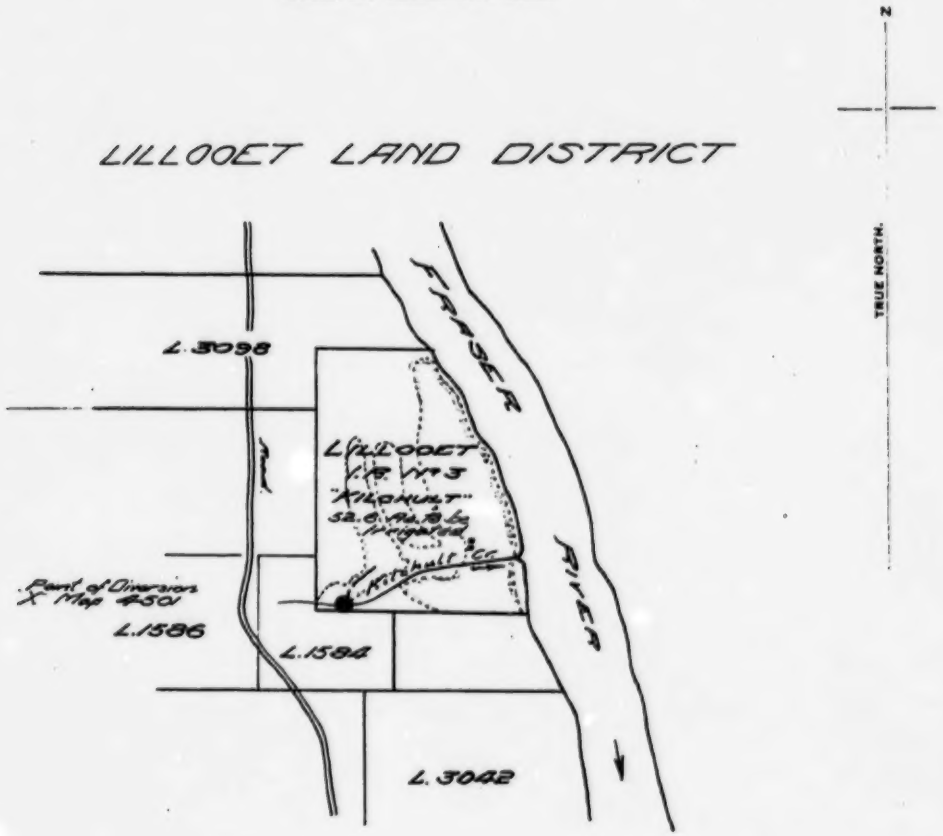

The boundaries of the land to which this licence is appurtenant are shown Shaded.

Signature E. H. Clement —

Date 30 Dec. 1920

EXHIBIT A

C. L. 3289
File 022720

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.

(For a Irrigation Purpose.)

WHEREAS the Board of Investigation, constituted and acting under the "Water Act, 1914," duly held an investigation respecting the water set out in the order No. 2675, a duplicate of which is hereto attached, and in the said order directed the Comptroller of Water Rights to issue a conditional licence in respect of the particular record and claim respectively set out therein, and further therein named the terms and conditions to be embodied in the said licence:

NOW, THEREFORE, I, Comptroller of Water Rights of the Province of British Columbia, in pursuance of the said order and in conformity with the "Water Act, 1914," issue this conditional licence, and declare the rights in and to the use of the said waters held under the said record in respect of the said claim to be such as are set out in the said order; and the terms and conditions of the said order and any exhibits which are therewith incorporated are hereby incorporated herewith and form a part hereof. This licence is appurtenant to McCartneys Flat I.R. (No.4 Lillooet).

Superseded by Final Licence 8162

Made and entered this 22nd day of October, 1923.

E. A. Cleveland

Comptroller of Water Rights.

No. 7163

Form No. 1606, W.R.B. (Licence in respect of Board Order)—1,500-12-21—5397.

Copy for Comptroller

PROVINCE OF BRITISH COLUMBIA. WATER RIGHTS BRANCH. DEPARTMENT OF LANDS.

DETERMINATION AND ORDER.

(FOR A CONDITIONAL WATER LICENCE FOR IRRIGATION PURPOSES.)

BY THE BOARD OF INVESTIGATION
UNDER THE "WATER ACT, 1914."

In the Matter of the Claims of the Department of Indian Affairs to Rights to the Use of the Waters

of a spring on McCartneys Flat I.R. (No.4 Lillooet) and a spring lying east of said Reserve

in the neighbourhood of Lillooet, in the

Lillooet Water District.

NOW, on the 11th day of June, 1920, the above-entitled matter coming on regularly for final hearing before the Board of Investigation; due notice having been given of the time and place of hearing; all and every the steps required under the Act to be taken by the Board before a determination of the said rights and claims should be made having been taken; all evidence, testimony, and proofs filed with the Board or presented in the above-entitled matter having been duly considered; a quorum of the Board being present at the hearing; and the Board being now fully advised in the premises, determines with respect to the said claims (which are on file and designated as Indian File No. 30-15-1) that a valid water record affecting the said claim was made under authority of an Act passed prior to the 12th day of March, 1909, and that under the said water record the Lillooet tribe or band of Indians was granted a right to take and use water from a spring on McCartneys Flat I.R. (No.4 Lillooet) and a spring lying east of said Reserve for irrigation and domestic purposes on the said McCartneys Flat Indian Reserve, being Reserve No. 4 of the said tribe or band.

Form 588. W.R.B.—2,000-12-20.

Order No. 2675a

Copy for [illegible]

2. The claims of the Department of Indian affairs with respect to the said waters are allowed by the Board to the extent hereinafter specified, and the Comptroller of Water Rights is hereby directed to issue a conditional licence in respect thereof embodying the following terms and conditions:—

(*a*.) The sources of the water supply are a spring on McCartneys Flat I.R. (No.4 Lillooet) and a spring lying east of said Reserve.

(*b*.) The points of diversion from the said sources are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(*c*.) The date ~~from~~ which the said licence shall take precedence is 23rd February, 1891.

(*d*.) The purpose for which the water is to be used is irrigation.

(*e*.) The maximum quantity of water per annum which may be used when irrigation is extended to all the lands mentioned in subclause (*g*) of this clause, until lawfully altered, is 997.5 acre-feet, and the maximum quantity of water which may be used per annum on each acre actually irrigated until lawfully altered is three (3) acre-feet: Provided that where sources of supply other than those named in subclause (*a*) hereof are drawn upon for the irrigation of a part or all of the same lands as are described in subclause (*g*) hereof, the maximum quantity of water which may be used under the licence hereby directed to be issued shall be reduced by the quantity which the licensee may be entitled to use from said other sources of supply: Provided further that when the Engineer of the Water District has accumulated the requisite hydrographic data for determining to the satisfaction of the Comptroller the *pro rata* part of the said total quantity to be apportioned to the licence hereby directed to be issued, the Comptroller shall require the surrender of the licence, and shall amend the same by stating the particular quantity to which the licensee is entitled from the particular sources named therein.

(*f*.) The period of the year during which the water may be used is between the first day of April and the thirtieth day of September.

(*g*.) The water may be used on McCartneys Flat I.R. (No.4 Lillooet) of which 332.5 acres are said to be irrigable. The extent and location of the said irrigable lands are more particularly shown in the said Exhibit "A."

(*h*.) The works which are required to be constructed before the issue of a final licence are the clearing, stumping, and levelling of the irrigable lands on the said reserve and the additional works required for conducting thereto the maximum quantity of water hereby authorized to be diverted.

(*i*.) The execution of the said works shall be commenced or resumed on or before the first day of June, 1924, and shall be prosecuted with due diligence and in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(*j*.) The said works shall be completed and the quantity of water to which the licensee is entitled beneficially used for the purpose set out in the licence on or before the first day of November, 1930.

(*k*.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

Board Order No.2675.

Copy for Comptroller

(*l.*) The nature and the extent of the incidental uses permitted under the licence are: For domestic purposes, the use of 1,000 gallons a day of water from any or all the said sources of supply during the whole of the year; and for storage purpose, such quantity of water (not exceeding ---------- acre-feet) as, together with the natural flow-water used hereunder, will be necessary to secure to the licensee the quantity granted hereunder. The water which may be so stored shall be that of ---------- and it may be stored (accumulated) in a reservoir at ---------- between the first day of October in each year and the first day of June in the succeeding year, and may be used as provided for in subclauses (*d*), (*e*), and (*f*) of this clause, but such uses shall not enlarge the quantity of water allowed by subclause (*c*) hereof.

(*m.*) The Board may extend the time for the commencement, resumption, or completion of the execution of the works on being satisfied that it is in the public interest and that it will not injuriously affect the rights of any licensee.

(*n.*) The licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part V. of the "Water Act, 1914," and shall be subject to all the provisions of the said Act, including the filing of proof of the completion of the said works and the putting of the water to such beneficial use within the time limited by the provisions of section 117 of the said Act.

3. Pending the issue of the licence hereby authorized to be issued, the terms and conditions of this order shall govern the respective rights of the record-holders or claimants affected thereby.

Made and entered this 22nd day of October, 1923.

THE BOARD OF INVESTIGATION.

By "J.S.T.Alexander", Chairman. Member.

and "J.E.Lamo", *Member.*

Map No. 4502

By TWW

Form 587, W.H.R.—5,000-12-20.

Order No. 2675.


Copy for Comptroller

British Columbia.

To accompany Order No. 2675 Precinct

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

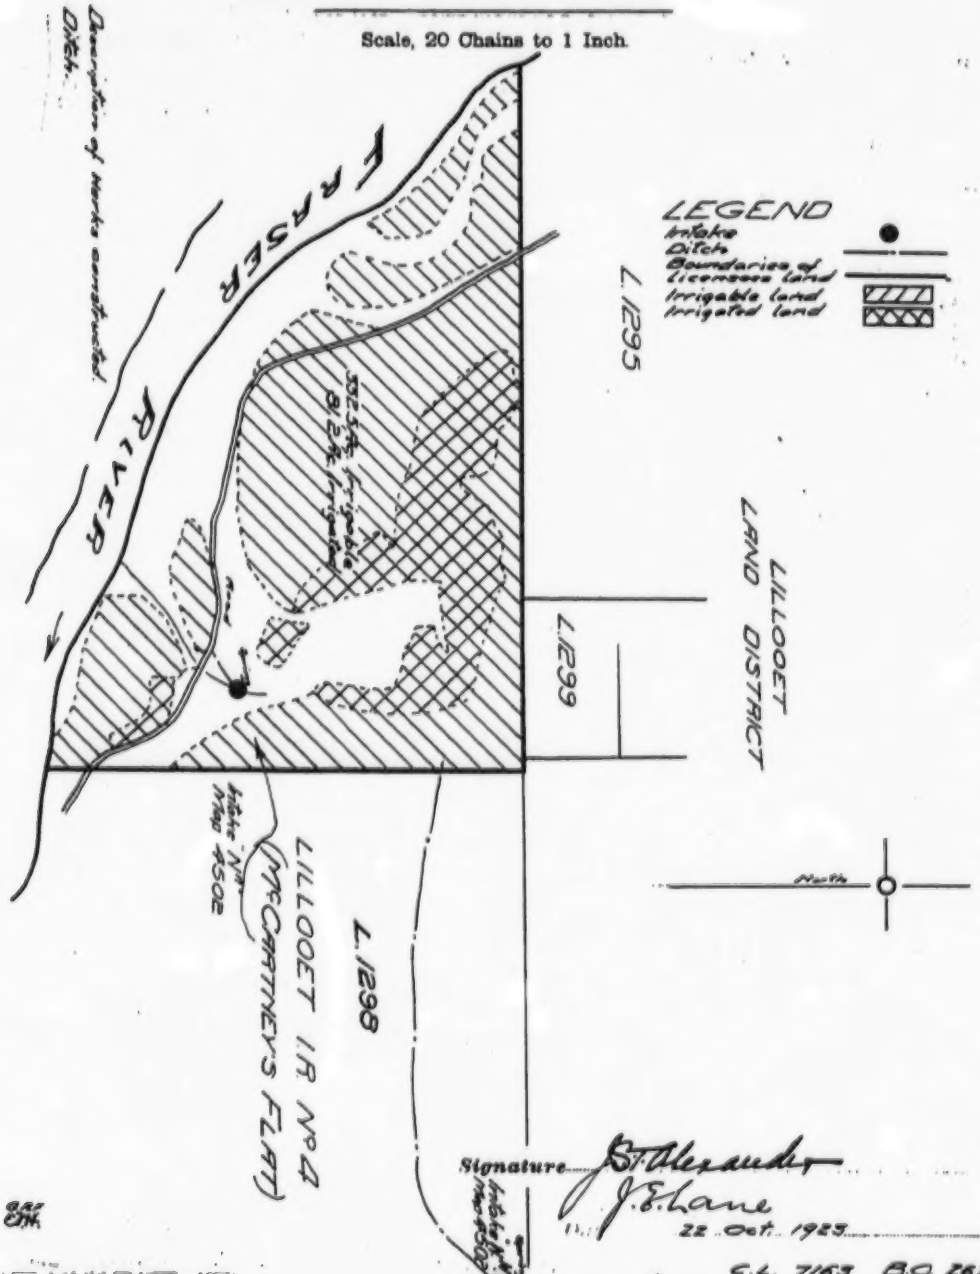

Signature J. B. Lane

22 Oct. 1923

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.

(For an **Irrigation** Purpose.)

WHEREAS the Board of Investigation, constituted and acting under the "Water Act, 1914," duly held an investigation respecting the water set out in the order No. **2646**, duplicate of which is hereto attached, and in the said order directed the Comptroller of Water Rights to issue a **conditional** licence in respect of the particular record and claim respectively set out therein, and further therein named the terms and conditions to be embodied in the said licence:

NOW, THEREFORE, I, Comptroller of Water Rights of the Province of British Columbia, in pursuance of the said order and in conformity with the "Water Act, 1914," issue this **conditional** licence, and declare the rights in and to the use of the said waters held under the said record in respect of the said claim to be such as are set out in the said order; and the terms and conditions of the said order and any exhibits which are therewith incorporated are hereby incorporated herewith and form a part hereof. This licence is appurtenant to **Towinock I.R. (No.2 Lillooet).**

Superseded by Final Licence 8163

Made and entered this 22nd day of October, 1923.

E. A. Cleveland
Comptroller of Water Rights.

No. 7167

Form No. 1008, W.R.B. (Licence in respect of Board Order)—1,500-1-23—504.

Copy for Conditional

PROVINCE OF BRITISH COLUMBIA. WATER RIGHTS BRANCH. DEPARTMENT OF LANDS.

DETERMINATION AND ORDER.

(FOR A CONDITIONAL WATER LICENCE FOR IRRIGATION PURPOSES.)

BY THE BOARD OF INVESTIGATION
UNDER THE "WATER ACT, 1914."

In the Matter of the Claims of the Department of Indian Affairs to Rights to the Use of the Waters

of Towinock Creek,

in the neighbourhood of Lillooet, in the

Lillooet Water District.

NOW, on the 11th day of June, 1920, the above-entitled matter coming on regularly for final hearing before the Board of Investigation; due notice having been given of the time and place of hearing; all and every the steps required under the Act to be taken by the Board before a determination of the said rights and claims should be made having been taken; all evidence, testimony, and proofs filed with the Board or presented in the above-entitled matter having been duly considered; a quorum of the Board being present at the hearing; and the Board being now fully advised in the premises, determines with respect to the said claims (which are on file and designated as Indian File No. 19-16-1) that a valid water record affecting the said claim was made under authority of an Act passed prior to the 12th day of March, 1909, and that under the said water record the Lillooet tribe or band of Indians was granted a right to take and use water from Towinock Creek, a tributary of Fraser River, for irrigation and domestic purposes on the Towinock I.R., being Reserve No.2 of the said tribe or band.

2. The claims of the Department of Indian affairs with respect to the said waters are allowed by the Board to the extent hereinafter specified, and the Comptroller of Water Rights is hereby directed to issue a conditional licence in respect thereof embodying the following terms and conditions:—

(*a.*) The sources of the water supply are Towinock Creek, a tributary of Fraser River.

(*b.*) The points of diversion from the said sources are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(*c.*) The date ~~the~~ from which the said licence shall take precedence is 12th September, 1870.

(*d.*) The purpose for which the water is to be used is irrigation.

(*e.*) The maximum quantity of water per annum which may be used when irrigation is extended to all the lands mentioned in subclause (*g*) of this clause, until lawfully altered, is 170.1 acre-feet, and the maximum quantity of water which may be used per annum on each acre actually irrigated until lawfully altered is three (3) acre-feet: Provided that where sources of supply other than those named in subclause (*a*) hereof are drawn upon for the irrigation of a part or all of the same lands as are described in subclause (*g*) hereof, the maximum quantity of water which may be used under the licence hereby directed to be issued shall be reduced by the quantity which the licensee may be entitled to use from said other sources of supply: Provided further that when the Engineer of the Water District has accumulated the requisite hydrographic data for determining to the satisfaction of the Comptroller the *pro rata* part of the said total quantity to be apportioned to the licence hereby directed to be issued, the Comptroller shall require the surrender of the licence, and shall amend the same by stating the particular quantity to which the licensee is entitled from the particular sources named therein.

(*f.*) The period of the year during which the water may be used is between the first day of April and the thirtieth day of September.

(*g.*) The water may be used on the Towinock I.R. (No.2 Lillooet) of which 56.7 acres are said to be irrigable. The extent and location of the said irrigable lands are more particularly shown in the said Exhibit "A."

(*h.*) The works which are required to be constructed before the issue of a final licence are the clearing, stumping, and levelling of the irrigable lands on the said reserve and the additional works required for conducting thereto the maximum quantity of water hereby authorized to be diverted.

(*i.*) The execution of the said works shall be commenced or resumed on or before the first day of June, 1924, and shall be prosecuted with due diligence and in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(*j.*) The said works shall be completed and the quantity of water to which the licensee is entitled beneficially used for the purpose set out in the licence on or before the first day of November, 1930.

(*k.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

Board Order No. 2646.

Copy for Comptroller

(*l.*) The nature and the extent of the incidental uses permitted under the licence are: For domestic purposes, the use of 1,000 gallons a day of water from any or all the said sources of supply during the whole of the year; and for storage purpose, such quantity of water (not exceeding ---------- acre-feet) as, together with the natural flow-water used hereunder, will be necessary to secure to the licensee the quantity granted hereunder. The water which may be so stored shall be that of ---------- and it may be stored (accumulated) in a reservoir at ----------

---------- between the first day of October in each year and the first day of June in the succeeding year, and may be used as provided for in subclauses (*d*), (*e*), and (*f*) of this clause, but such uses shall not enlarge the quantity of water allowed by subclause (*e*) hereof.

(*m.*) The Board may extend the time for the commencement, resumption, or completion of the execution of the works on being satisfied that it is in the public interest and that it will not injuriously affect the rights of any licensee.

(*n.*) The licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part V. of the "Water Act, 1914," and shall be subject to all the provisions of the said Act, including the filing of proof of the completion of the said works and the putting of the water to such beneficial use within the time limited by the provisions of section 117 of the said Act.

.....

.....

.....

.....

.....


3. Pending the issue of the licence hereby authorized to be issued, the terms and conditions of this order shall govern the respective rights of the record-holders or claimants affected thereby.

Made and entered this 22nd day of October, 1923.

THE BOARD OF INVESTIGATION.

By "J.S.T.Alexander", Chairman.
Member.

and "J.E.Lane", *Member.*



Form 387. W.R.B.—2,000-12-20.


Order No. 2616.

British Columbia.

To accompany Order No 2646 ... Precinct

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

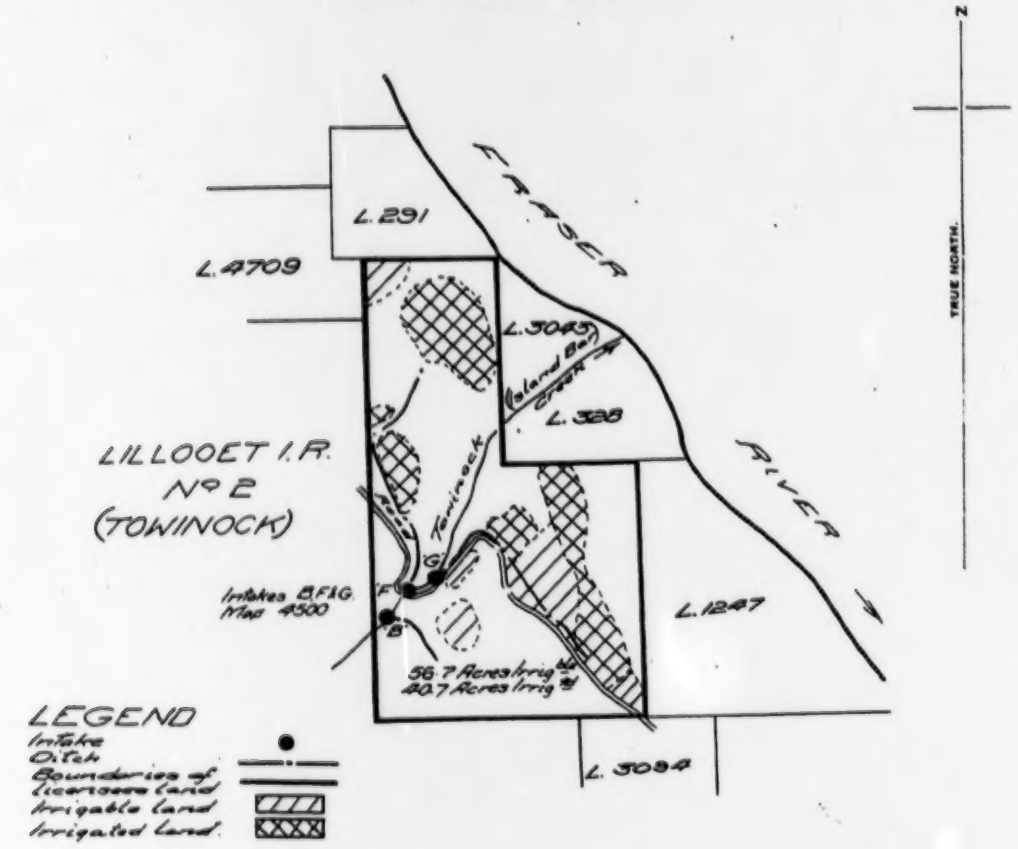

Description of works constructed.
Ditches & Flumes.

LILLOOET LAND DISTRICT

Signature J.T. Alexander

J. Shane
22 Oct. 1929
C.L. 7167 B.C. 2646
File 19.16.1

EXHIBIT 'A'

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.

(For a n **Irrigation** Purpose.)

WHEREAS the Board of Investigation, constituted and acting under the "Water Act, 1914," duly held an investigation respecting the water set out in the order No. **2742**, duplicate of which is hereto attached, and in the said order directed the Comptroller of Water Rights to issue a **conditional** licence in respect of the particular record and claim respectively set out therein, and further therein named the terms and conditions to be embodied in the said licence:

NOW, THEREFORE, I, Comptroller of Water Rights of the Province of British Columbia, in pursuance of the said order and in conformity with the "Water Act, 1914," issue this **conditional** licence, and declare the rights in and to the use of the said waters held under the said record in respect of the said claim to be such as are set out in the said order; and the terms and conditions of the said order and any exhibits which are therewith incorporated are hereby incorporated herewith and form a part hereof. This licence is appurtenant to **Lillooet Indian Reserve No.1.**

Superseded by Final Licence 8793

Made and entered this 22nd day of October, 1923

E. A. Cleveland

Comptroller of Water Rights.

No. 7172

Form No. 1008, W.R.B. (Licence in respect of Board Order)—1,500-1-25—584.

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

DETERMINATION AND ORDER.

(FOR A CONDITIONAL WATER LICENCE FOR IRRIGATION PURPOSES.)

BY THE BOARD OF INVESTIGATION
UNDER THE "WATER ACT, 1914."

In the Matter of the Claims of the Department of Indian Affairs to Rights to the Use of the Waters

of Various springs on Lillooet Indian Reserve No.1

in the neighbourhood of Lillooet, in the

Lillooet Water District.

NOW, on the 11th day of June, 1920, the above-entitled matter coming on regularly for final hearing before the Board of Investigation; due notice having been given of the time and place of hearing; all and every the steps required under the Act to be taken by the Board before a determination of the said rights and claims should be made having been taken; all evidence, testimony, and proofs filed with the Board or presented in the above-entitled matter having been duly considered; a quorum of the Board being present at the hearing; and the Board being now fully advised in the premises, determines with respect to the said claims (which are on file and designated as Indian File No. 9-16-1) that a valid water record affecting the said claim was made under authority of an Act passed prior to the 12th day of March, 1909, and that under the said water record the Lillooet tribe or band of Indians was granted a right to take and use water from springs on the Lillooet Indian Reserve No.1 for irrigation and domestic purposes on the said Lillooet Indian Reserve, being Reserve No.1 of the said tribe or band.

Copy for consideration

2. The claims of the Department of Indian affairs with respect to the said waters are allowed by the Board to the extent hereinafter specified, and the Comptroller of Water Rights is hereby directed to issue a conditional licence in respect thereof embodying the following terms and conditions:—

(*a.*) The sources of the water supply are springs on the Lillooet Indian Reserve No.1.

(*b.*) The points of diversion from the said sources are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(*c.*) The date ~~for~~ from which the said licence shall take precedence is 23rd February, 1891.

(*d.*) The purpose for which the water is to be used is irrigation.

(*e.*) The maximum quantity of water per annum which may be used when irrigation is extended to all the lands mentioned in subclause (*g*) of this clause, until lawfully altered, is 766.5 acre-feet, and the maximum quantity of water which may be used per annum on each acre actually irrigated until lawfully altered is three (3) acre-feet: Provided that where sources of supply other than those named in subclause (*a*) hereof are drawn upon for the irrigation of a part or all of the same lands as are described in subclause (*g*) hereof, the maximum quantity of water which may be used under the licence hereby directed to be issued shall be reduced by the quantity which the licensee may be entitled to use from said other sources of supply: Provided further that when the Engineer of the Water District has accumulated the requisite hydrographic data for determining to the satisfaction of the Comptroller the *pro rata* part of the said total quantity to be apportioned to the licence hereby directed to be issued, the Comptroller shall require the surrender of the licence, and shall amend the same by stating the particular quantity to which the licensee is entitled from the particular sources named therein.

(*f.*) The period of the year during which the water may be used is between the first day of April and the thirtieth day of September.

(*g.*) The water may be used on the Lillooet Indian Reserve No.1 of which 255.5 acres are said to be irrigable. The extent and location of the said irrigable lands are more particularly shown in the said Exhibit "A."

(*h.*) The works which are required to be constructed before the issue of a final licence are the clearing, stumping, and levelling of the irrigable lands on the said reserve and the additional works required for conducting thereto the maximum quantity of water hereby authorized to be diverted.

(*i.*) The execution of the said works shall be commenced or resumed on or before the first day of June, 1924, and shall be prosecuted with due diligence and in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(*j.*) The said works shall be completed and the quantity of water to which the licensee is entitled beneficially used for the purpose set out in the licence on or before the first day of November, 1930.

(*k.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

Board Order No.2742.

Copy for Commissioner

(*l.*) The nature and the extent of the incidental uses permitted under the licence are: For domestic purposes, the use of 5,500 gallons a day of water from any or all the said sources of supply during the whole of the year; and for storage purpose, such quantity of water (not exceeding ~~***

LILLOOET WATER DISTRICT

To accompany Order No 2742.
Scale 20 Chains to an inch.

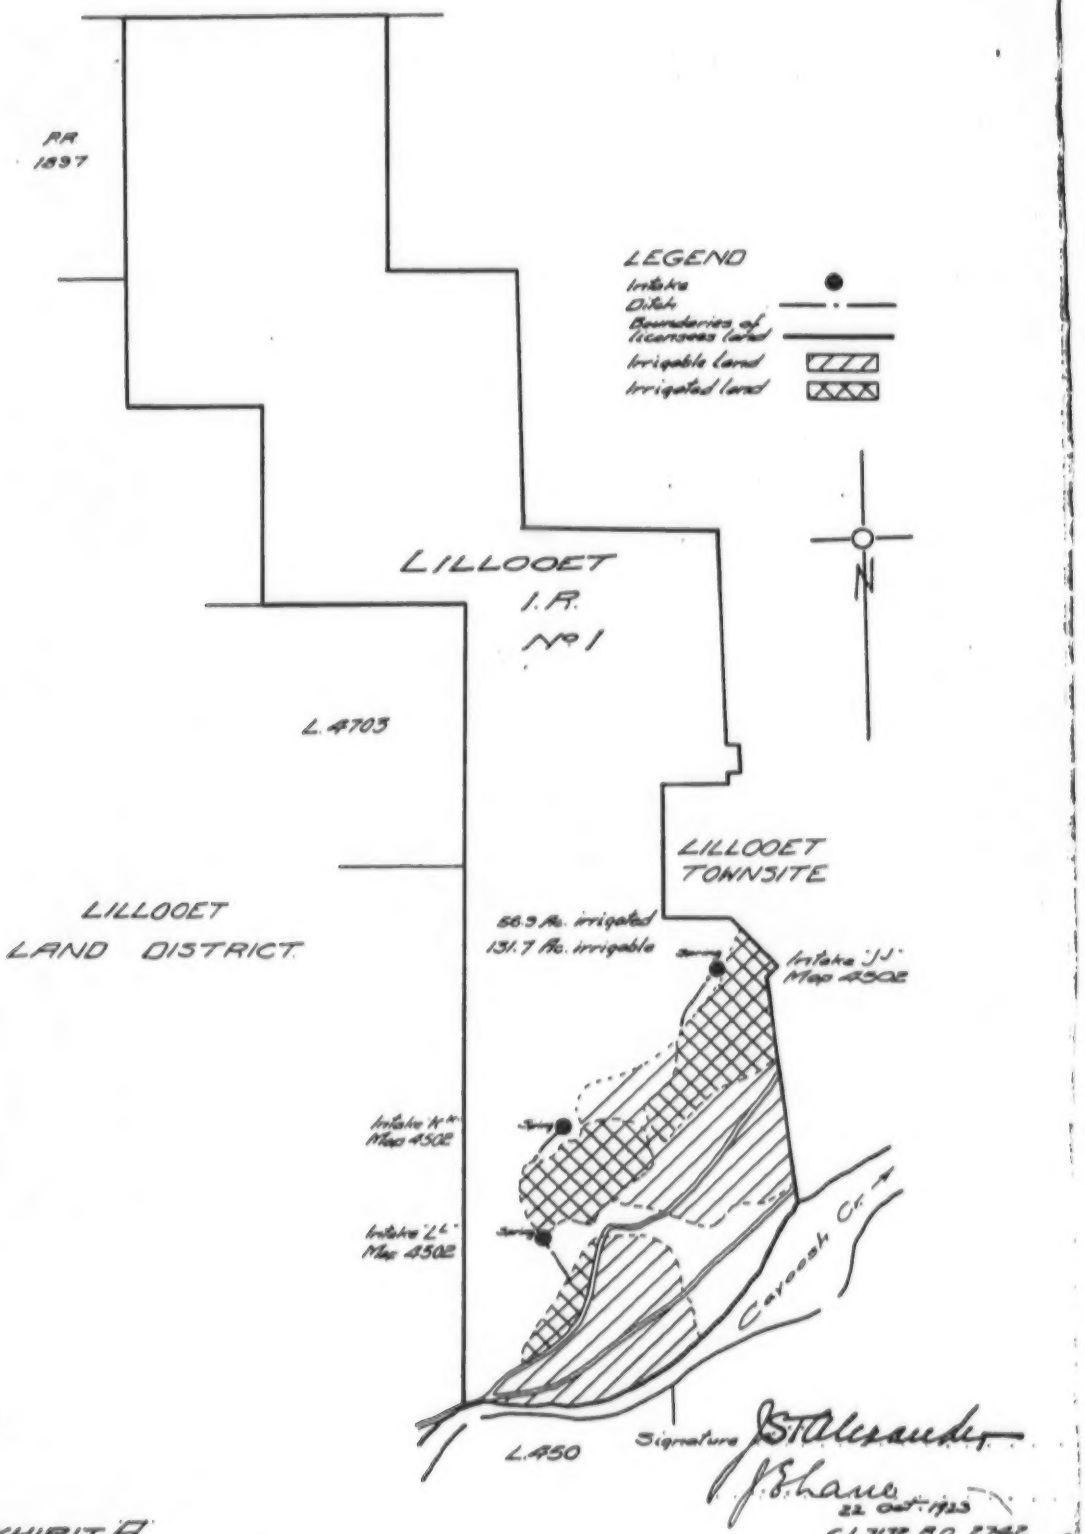


EXHIBIT A

File No. 12-16-1.

WATER ACT

IN THE MATTER OF Conditional Licence No. 7371, which authorizes the diversion of water from Tyee Jimmie Creek, a tributary of Dickie Creek, for use on Lillooet I.R. No.1.

. . . . . .

BEFORE THE BOARD OF INVESTIGATION

Upon the application of the Department of Indian Affairs for the amendment of the above licence on the ground that the plat attached thereto is imperfect in that it does not show the upper and lower intakes on Town Creek nor the ditch leading from them and the Board having found that the ditch from the said lower intake is an important conduit for water to the lower parts of the Reserve and that there is possibility of its being confused with other ditches in the neighbourhood unless properly defined in the said Conditional Licence No. 7371;

IT IS ORDERED

That the said Conditional Licence be amended by attaching thereto the plan marked Exhibit "AA" showing all the Indian intakes on Town Creek and the ditches leading therefrom, which said plan is drawn to a scale of 20 chains to one inch and is signed by the Chairman and one member of this Board.

DATED this 26th day of May, 1927.


BOARD OF INVESTIGATION UNDER THE WATER ACT

7371

"J.E. LANE" Chairman.

Board Order No. 11,278.

"J.S.T. ALEXANDER" Member.

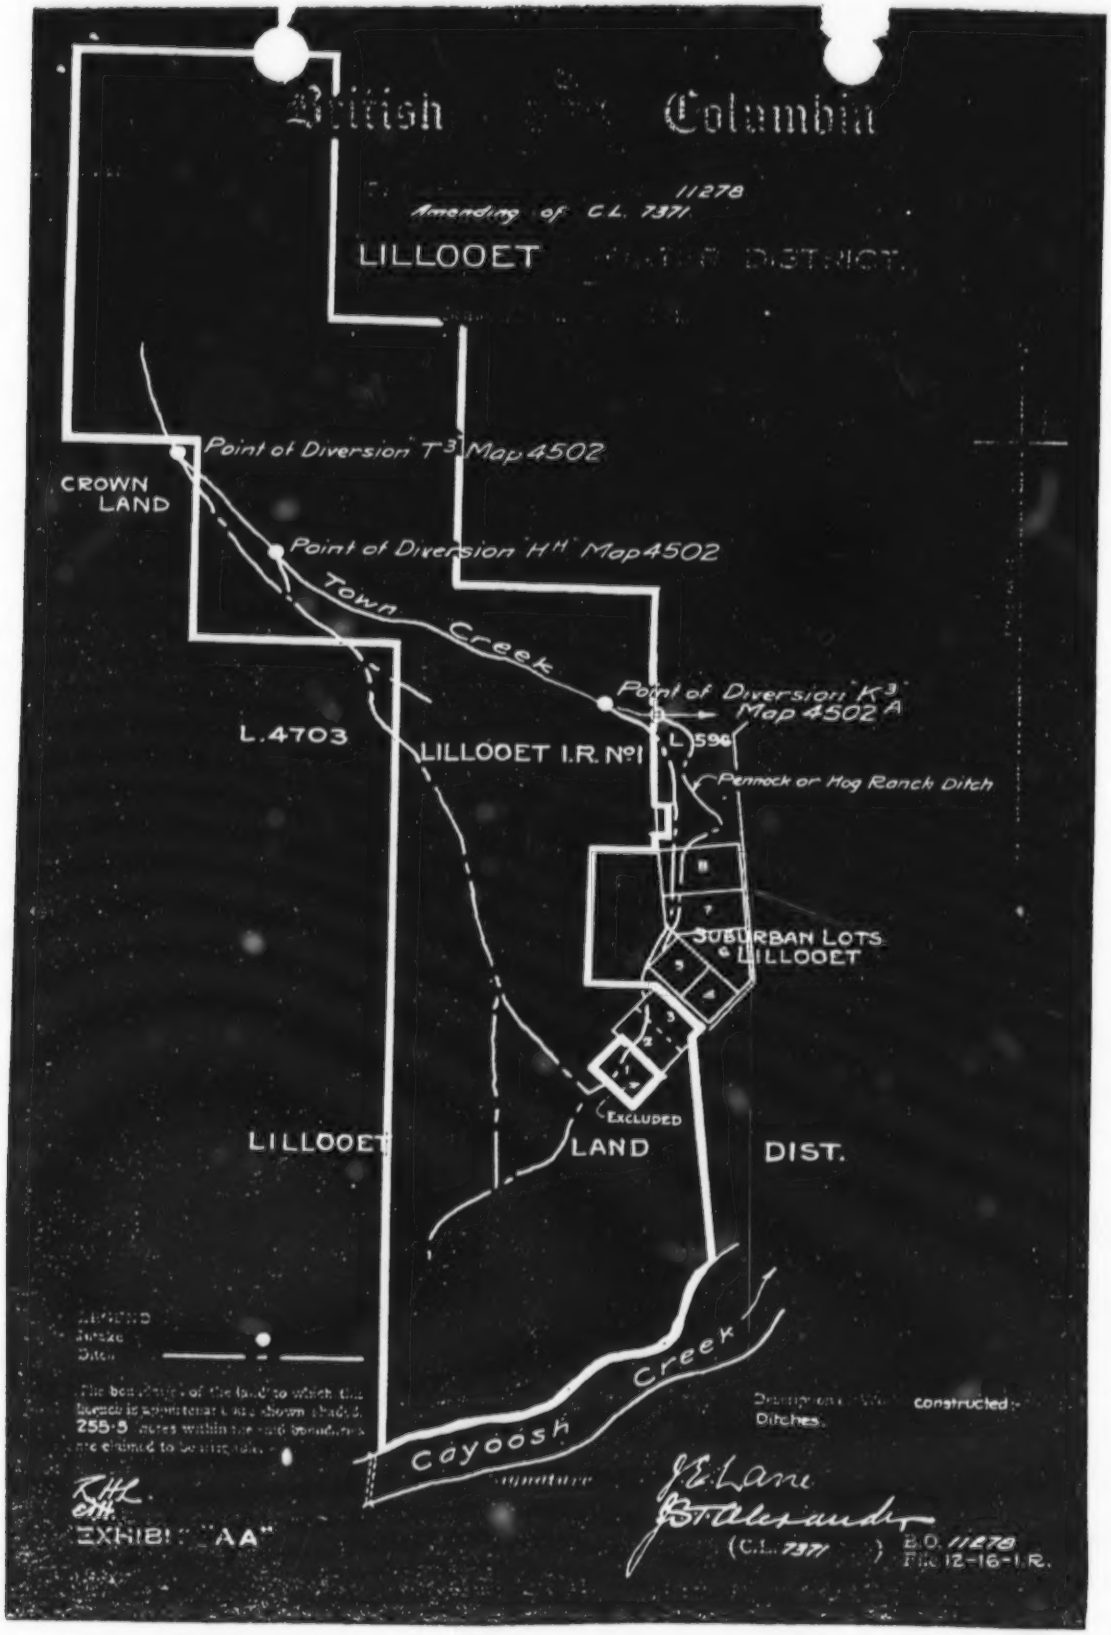
British Columbia
11278
Amending of C.L. 7371
LILLOOET
Point of Diversion T3 Map 4502
CROWN LAND
Point of Diversion H11 Map 4502
Town Creek
Point of Diversion K3 Map 4502 A
L.4703
LILLOOET I.R. No1
L 596
Pennock or Hog Ranch Ditch
SUBURBAN LOTS @ LILLOOET
EXCLUDED
LILLOOET LAND DIST.
Cayoosh Creek
Ditches.
constructed:-
EXHIBIT "AA"
(C.L. 7371)
B.O. 11278
File 12-16-1.R.

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.

(For an Irrigation Purpose.)

WHEREAS the Board of Investigation, constituted and acting under the "Water Act, 1914," duly held an investigation respecting the water set out in the order No. 2748, duplicate of which is hereto attached, and in the said order directed the Comptroller of Water Rights to issue a conditional licence in respect of the particular record and claim respectively set out therein, and further therein named the terms and conditions to be embodied in the said licence:

NOW, THEREFORE, I, Comptroller of Water Rights of the Province of British Columbia, in pursuance of the said order and in conformity with the "Water Act, 1914," issue this conditional licence, and declare the rights in and to the use of the said waters held under the said record in respect of the said claim to be such as are set out in the said order; and the terms and conditions of the said order and any exhibits which are therewith incorporated are hereby incorporated herewith and form a part hereof. This licence is appurtenant to Lillooet Indian Reserve No.1.

Amended by B.O. 11278. 26 May 1927

Superseded by 9626
Final Licence

Made and entered this 25th day of January, 192[illegible]

E. A. Cleveland
Comptroller of Water Rights.

No. 7371

Form No. 1006, W.R.B. (Licence in respect of Board Order)—1,500-1-23—504.

Copy to Commissioner

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

DETERMINATION AND ORDER.

(FOR A CONDITIONAL WATER LICENCE FOR IRRIGATION PURPOSES.)

BY THE BOARD OF INVESTIGATION
UNDER THE "WATER ACT, 1914."

In the Matter of the Claims of the Department of Indian Affairs to Rights to the Use of the Waters

of Tyee Jimmie Creek

in the neighbourhood of Lillooet, in the

Lillooet Water District.

NOW, on the 11th day of June, 1920, the above-entitled matter coming on regularly for final hearing before the Board of Investigation; due notice having been given of the time and place of hearing; all and every the steps required under the Act to be taken by the Board before a determination of the said rights and claims should be made having been taken; all evidence, testimony, and proofs filed with the Board or presented in the above-entitled matter having been duly considered; a quorum of the Board being present at the hearing; and the Board being now fully advised in the premises, determines with respect to the said claims (which are on file and designated as Indian File No. 12-16-1) that a valid water record affecting the said claim was made under authority of an Act passed prior to the 12th day of March, 1909, and that under the said water record the Lillooet tribe or band of Indians was granted a right to take and use water from unnamed springs now known as Tyee Jimmie Creek for irrigation and domestic purposes on the Lillooet Indian Reserve, being Reserve No.1 of the said tribe or band.

7371

Form 586, W.R.B. 2,000-12-20.

Order No. 2748.

Copy to Comptroller

2. The claims of the Department of Indian affairs with respect to the said waters are allowed by the Board to the extent hereinafter specified, and the Comptroller of Water Rights is hereby directed to issue a conditional licence in respect thereof embodying the following terms and conditions:—

(*a*.) The sources of the water supply is Tyee Jimmie Creek, a tributary of Dickie Creek.

(*b*.) The points of diversion from the said sources are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(*c*.) The date for which the said licence shall take precedence is from 13th May, 1903.

(*d*.) The purpose for which the water is to be used is irrigation.

(*e*.) The maximum quantity of water per annum which may be used when irrigation is extended to all the lands mentioned in subclause (*g*) of this clause, until lawfully altered, is 760.5 acre-feet, and the maximum quantity of water which may be used per annum on each acre actually irrigated until lawfully altered is three (3) acre-feet: Provided that where sources of supply other than those named in subclause (*a*) hereof are drawn upon for the irrigation of a part or all of the same lands as are described in subclause (*g*) hereof, the maximum quantity of water which may be used under the licence hereby directed to be issued shall be reduced by the quantity which the licensee may be entitled to use from said other sources of supply: Provided further that when the Engineer of the Water District has accumulated the requisite hydrographic data for determining to the satisfaction of the Comptroller the *pro rata* part of the said total quantity to be apportioned to the licence hereby directed to be issued, the Comptroller shall require the surrender of the licence, and shall amend the same by stating the particular quantity to which the licensee is entitled from the particular sources named therein.

(*f*.) The period of the year during which the water may be used is between the first day of April and the thirtieth day of September.

(*g*.) The water may be used on Lillooet Indian Reserve No.1 of which 255.5 acres are said to be irrigable. The extent and location of the said irrigable lands are more particularly shown in the said Exhibit "A."

(*h*.) The works which are required to be constructed before the issue of a final licence are the clearing, stumping, and levelling of the irrigable lands on the said reserve and the additional works required for conducting thereto the maximum quantity of water hereby authorized to be diverted.

(*i*.) The execution of the said works shall be commenced or resumed on or before the first day of June, 1924, and shall be prosecuted with due diligence and in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(*j*.) The said works shall be completed and the quantity of water to which the licensee is entitled beneficially used for the purpose set out in the licence on or before the first day of November, 1930.

(*k*.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

7371

Board Order No. 2748.

Copy for Comptroller

(l.) The nature and the extent of the incidental uses permitted under the licence are: For domestic purposes, the use of 5,500 gallons a day of water from any or all the said sources of supply during the whole of the year; and for storage purpose, such quantity of water (not exceeding ---------- acre-feet) as, together with the natural flow-water used hereunder, will be necessary to secure to the licensee the quantity granted hereunder. The water which may be so stored shall be that of ---------- and it may be stored (accumulated) in a reservoir at ---------- between the first day of October in each year and the first day of June in the succeeding year, and may be used as provided for in subclauses (*d*), (*e*), and (*f*) of this clause, but such uses shall not enlarge the quantity of water allowed by subclause (*e*) hereof.

(m.) The Board may extend the time for the commencement, resumption, or completion of the execution of the works on being satisfied that it is in the public interest and that it will not injuriously affect the rights of any licensee.

(n.) The licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part V. of the "Water Act, 1914," and shall be subject to all the provisions of the said Act, including the filing of proof of the completion of the said works and the putting of the water to such beneficial use within the time limited by the provisions of section 117 of the said Act.

.....

.....

.....

.....

.....

3. Pending the issue of the licence hereby authorized to be issued, the terms and conditions of this order shall govern the respective rights of the record-holders or claimants affected thereby.

Made and entered this 25th day of January, 1921.

THE BOARD OF INVESTIGATION.

By "J.S.T.Alexander" Member. ~~Chairman.~~

and "J.E.Lane" *Member.*

Public Works
No. 4502
By. SMW

7371

Order No. 2748.


Copy for Water Recorder

British Columbia.

To accompany Board Order No 2748 Precinct

LILLOOET WATER DISTRICT.

Scale, 80 Chains to 1 Inch.

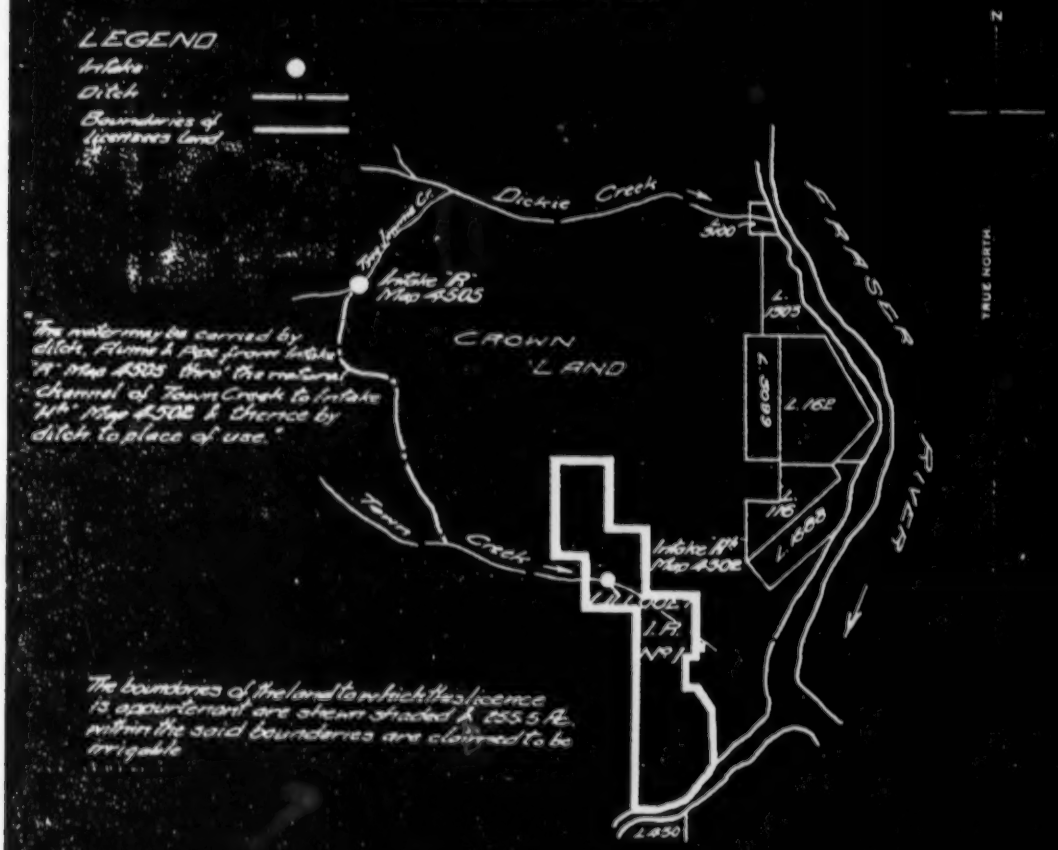

LILLOOET LAND DISTRICT

Description of Works constructed:
Ditch Pipe & Flume.

Signature J. T. Alexander

Date J. B. Lam 25/1/24

CL 7371 BO 2748

EXHIBIT A

PROVINCE OF BRITISH COLUMBIA. | WATER RIGHTS BRANCH. | DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.
(IRRIGATION.)

Appurtenant to 67 acres of Lillooet Indian Reserve No. 3 (Kilchutt) and of Lillooet Indian Reserve No. 1B (formerly Lot 3042, Group 1, Lillooet District)

WHEREAS HARRY GRAHAM, Indian Agent, in trust for the Indians located on Lillooet Indian Reserves Nos. 1B and 3, whose post-office address is Lytton, B.C.

as owner or lawful occupant of the land hereinafter specified, has applied for a licence to take and use water in the manner hereinafter set out, and has taken all the preliminary steps required of such applicant under the "Water Act" prior to the issue of this licence, and is, under the said Act, entitled thereto:

Now, therefore, in pursuance of the said Act, this conditional licence is issued, granting the licensee hereunder the right to take and use water under the following terms and conditions:—

(1.) The source of the water-supply is Riley Creek, tributary of Fraser River.

(2.) The point of diversion from the stream is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(3.) The date from which this licence shall take precedence is 19th June, 1925.

(4.) The purpose for which the water is to be used is irrigation and incidentally domestic use.

(5.) The maximum quantity of water which may be diverted for use upon the lands mentioned in clause (7) hereof when all of the said lands are under irrigation is, until lawfully altered 200 acre-feet per annum, and such additional quantity as the District Engineer may from time to time determine should be allowed for seepage and evaporation; and the maximum quantity which may be used on any acre of the said lands in any year is 3 acre-feet: Provided that of the said 200 acre-feet there may be used 1,000 gallons of water a day throughout the whole year for domestic purpose.

Superseded by Final Licence 8/1/5

(6.) The period of the year during which the water may be used is 1st April to 30th September.

(7.) The area and description of the lands upon which the water may be used are 67 acres, comprising parts of Lillooet Indian Reserve No. 3, (Kilchutt) and part of Lillooet Indian Reserve No. 1B (formerly Lot 3042, Group 1, Lillooet District)

The extent and location of the said irrigable lands are further shown in the said exhibit "A."

Licence Number 8326

Form 1004, W.R.B. (Conditional Licence—Irrigation)—1M-725-1754

File No. 061722.

ORIGINAL

(8.) The said lands shall be properly prepared for irrigation and irrigated beneficially from the said works on or before the first day of November, 1930.

(9.) Works for the diversion and the carriage of the water as set forth in the exhibit marked "B" which is hereto attached made a part hereof shall be constructed in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

The said construction shall be commenced on or before the first day of May, 1926.

The said construction shall be prosecuted with due diligence and to the satisfaction of the Comptroller and shall be completed on or before the first day of November, 1930.

(10.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(11.) This licence is supplementary to ..... Licence No. ..... for the diversion of ..... acre-feet per annum from ..... and Licence No. ..... for the diversion of ..... acre-feet per annum from ....., but no more than ..... acre-feet of water (exclusive of the quantity allowed for seepage and evaporation) may be diverted from all sources for use upon the lands described in clause 7 hereof.

(12.) This licence is subject to readjustment when hydrometric surveys have been made of the sources of supply mentioned in clauses (1) and (11) hereof and complete information obtained respecting the requirements of all lands watered therefrom and the licensee shall surrender the licence for amendment when called upon to do so.

(13.) This licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part II. of the "Water Act," and shall be subject to all the provisions of said Act, including especially the provisions of section 74 thereof requiring the filing of proof of the completion of the said works and of making beneficial use of the water as authorized within the time herein prescribed.

(14.) .....

.....

.....

.....

.....

Issued this 12th day of January, 1926.

File No. 061722.

E. Holeman

Comptroller of Water Rights.

8326

Licence Number.....

Form 1004, W.R.B. (Conditional Licence—Irrigation)—1M-725-1754

ORIGINAL

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

EXHIBIT "B."

(APPROVAL OF PLANS AND LIST OF WORKS TO BE CONSTRUCTED.)

The works which are accepted as necessary and suitable for the taking and (or) using of the water under the above-mentioned licence, and which are more fully set out in the plans and specifications filed in the office of the Comptroller of Water Rights numbered 450011 B

as altered, amended, or limited by supplemental plans and specifications numbered

or in letters or other documents referred to as

which plans and specifications as thus altered, amended, or limited are hereby approved, are as follows:—

Ditch and flume.

File No. 061722.

4501

JHW

E. H. Cleveland

Comptroller of Water Rights.

Form 1001. W.R.B. (Approval of Plans)—2,500-1925-2401—(Forming part of Conditional Water Licence No. 8326.)


ORIGINAL

British Columbia.

To accompany Conditional Licence No. 8326

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

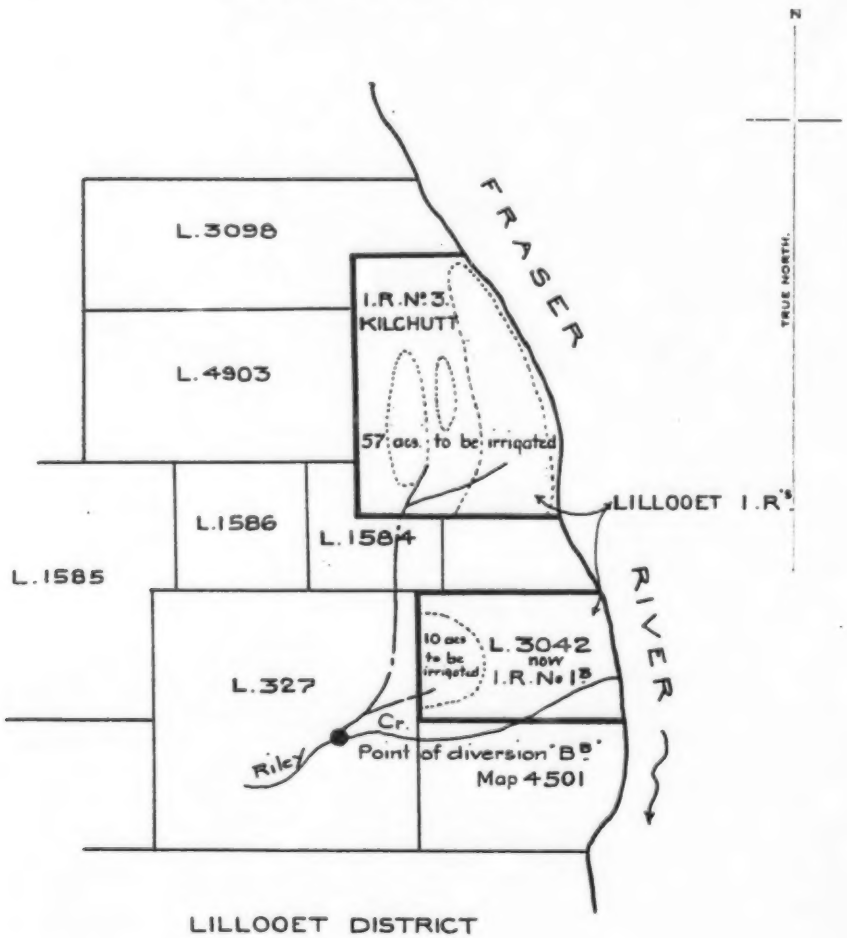

LILLOOET DISTRICT

The boundaries of the land to which this licence is appurtenant are shown shaded.

RWS
E.H.

Signature E. Hebenland

Date 12 Jan. 1926

8326
File 061722

EXHIBIT "A"

586-225-129

W.R.B. 18—6M-643-2040 (2)

PROVINCE OF BRITISH COLUMBIA

Water Rights Branch

DEPARTMENT OF LANDS AND FORESTS

CONDITIONAL WATER LICENCE

DIRECTOR OF INDIAN AFFAIRS of Ottawa, Ontario is hereby authorized to divert and use water as follows:—

(a) The source of the water-supply is Ranchérie Spring.

(b) The point of diversion is located as shown on the attached plan.

(c) The date from which this licence shall have precedence is 29th June 1949.

(d) The purpose for which the water is to be used is irrigation and domestic.

(e) The maximum quantity of water which may be diverted is 31.4 acre feet per annum, of which quantity 1000 gallons a day may be used for domestic purpose and such additional quantity as the Engineer may from time to time determine should be allowed for losses.

(f) The period of the year during which the water may be used for irrigation purpose is 1st April to 30th September and for domestic purpose is the whole year.

(g) The land upon which the water is to be used and to which this licence is appurtenant is part of South East portion of Lillooet Indian Reserve No. 1, of which 10.4 acres may be irrigated

(h) The works authorized to be constructed are pipe and ditch

and they shall be located approximately as shown on the attached plan.

(i) The construction of the said works shall be commenced on or before the 30th day of June 19 50 and shall be completed and the water beneficially used on or before the 31st day of December 1951.

ENTERED ON
Map No. 4502
Map No.
By

26-1-54.

Deputy *Comptroller of Water Rights.*

File No. 0179485 Date issued October 1, 1949 Licence No. 19208


(13)


British Columbia

To accompany Conditional Licence No. 19208
& Permit for Right of Way over Crown Land

LILLOOET WATER DISTRICT

Scale: 6 Chains to 1 Inch.

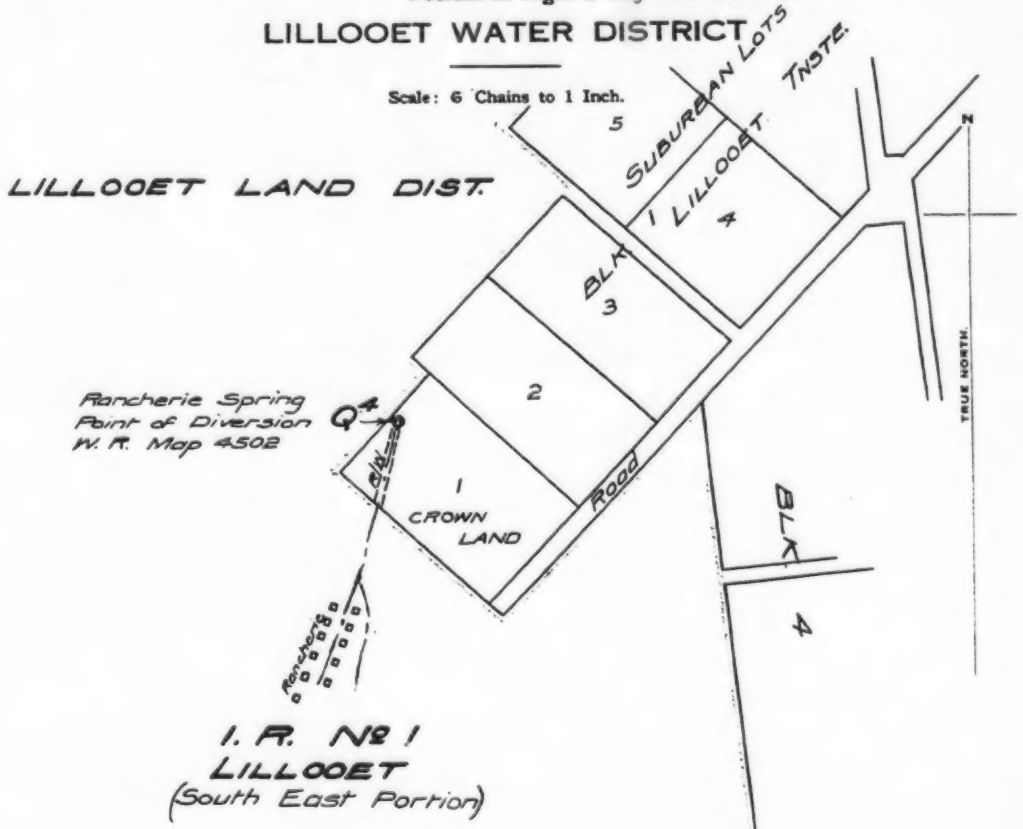



LEGEND.

Point of Diversion O

Ditch & Pipeline ——— - ———

Right of Way

The boundaries of the land to which this licence is appurtenant are shown thus; ———

Signature J. E. Lane

Date 1st Oct. 1949

C.L. 19208
File 0179485

EXHIBIT "A"

100-345-8807

For R/W see Ref. Map 89(C-1)

WATER RIGHTS BRANCH
DEPARTMENT OF LANDS AND FORESTS

ORDER

WATER ACT

Section 13

File No. 0202521

The provisions of the B. C. Water Act having been complied with and being satisfied that no person's rights will be affected, I hereby extend the time for the completion of the works and for making beneficial use of the water authorized under Conditional Water Licence No. 21993 , Reservation Spring #3 to the 31st day of December, 1958.

V. Raudsepp.

Deputy Comptroller of Water Rights.

DATED at Victoria, B. C.,

this 12th day of April , 1957.

W.R.B. 42

W.R.B. 22 (2)

PROVINCE OF BRITISH COLUMBIA

Water Rights Branch

DEPARTMENT OF LANDS AND FORESTS

CONDITIONAL WATER LICENCE

DIRECTOR OF INDIAN AFFAIRS of Ottawa, Ontario.

is hereby authorized to divert and use water as follows:—

(a) The source of the water-supply is Reservation Spring No. 3.

(b) The point of diversion is located as shown on the attached plan.

(c) The date from which this licence shall have precedence is 6th January, 1954.

(d) The purpose for which the water is to be used is irrigation.

(e) The maximum quantity of water which may be diverted is 13.5 acre feet per annum and such additional quantity as the Engineer may from time to time determine should be allowed for losses.

(f) The period of the year during which the water may be used is 1st April to 30th September.

(g) The land upon which the water is to be used and to which this licence is appurtenant is Indian Reserve No. 1, Lillooet, of which 4.5 acres may be irrigated.

(h) The works authorized to be constructed are ditch and they shall be located approximately as shown on the attached plan.

(i) The construction of the said works shall be commenced on or before the 31st day of July, 1954, and shall be completed and the water beneficially used on or before the 31st day of December, 1956.

ENTERED ON
Mar 1 1954
R.M.L.

E.H. Tredcroft

(E.H. Tredcroft)
Comptroller of Water Rights.

File No. 0202521 Date issued May 1, 1954. Licence No. 21993

10


British Columbia

To accompany Conditional Licence No 21993

LILLOOET WATER DISTRICT

L.7637

Scale 500 Feet to 1 Inch

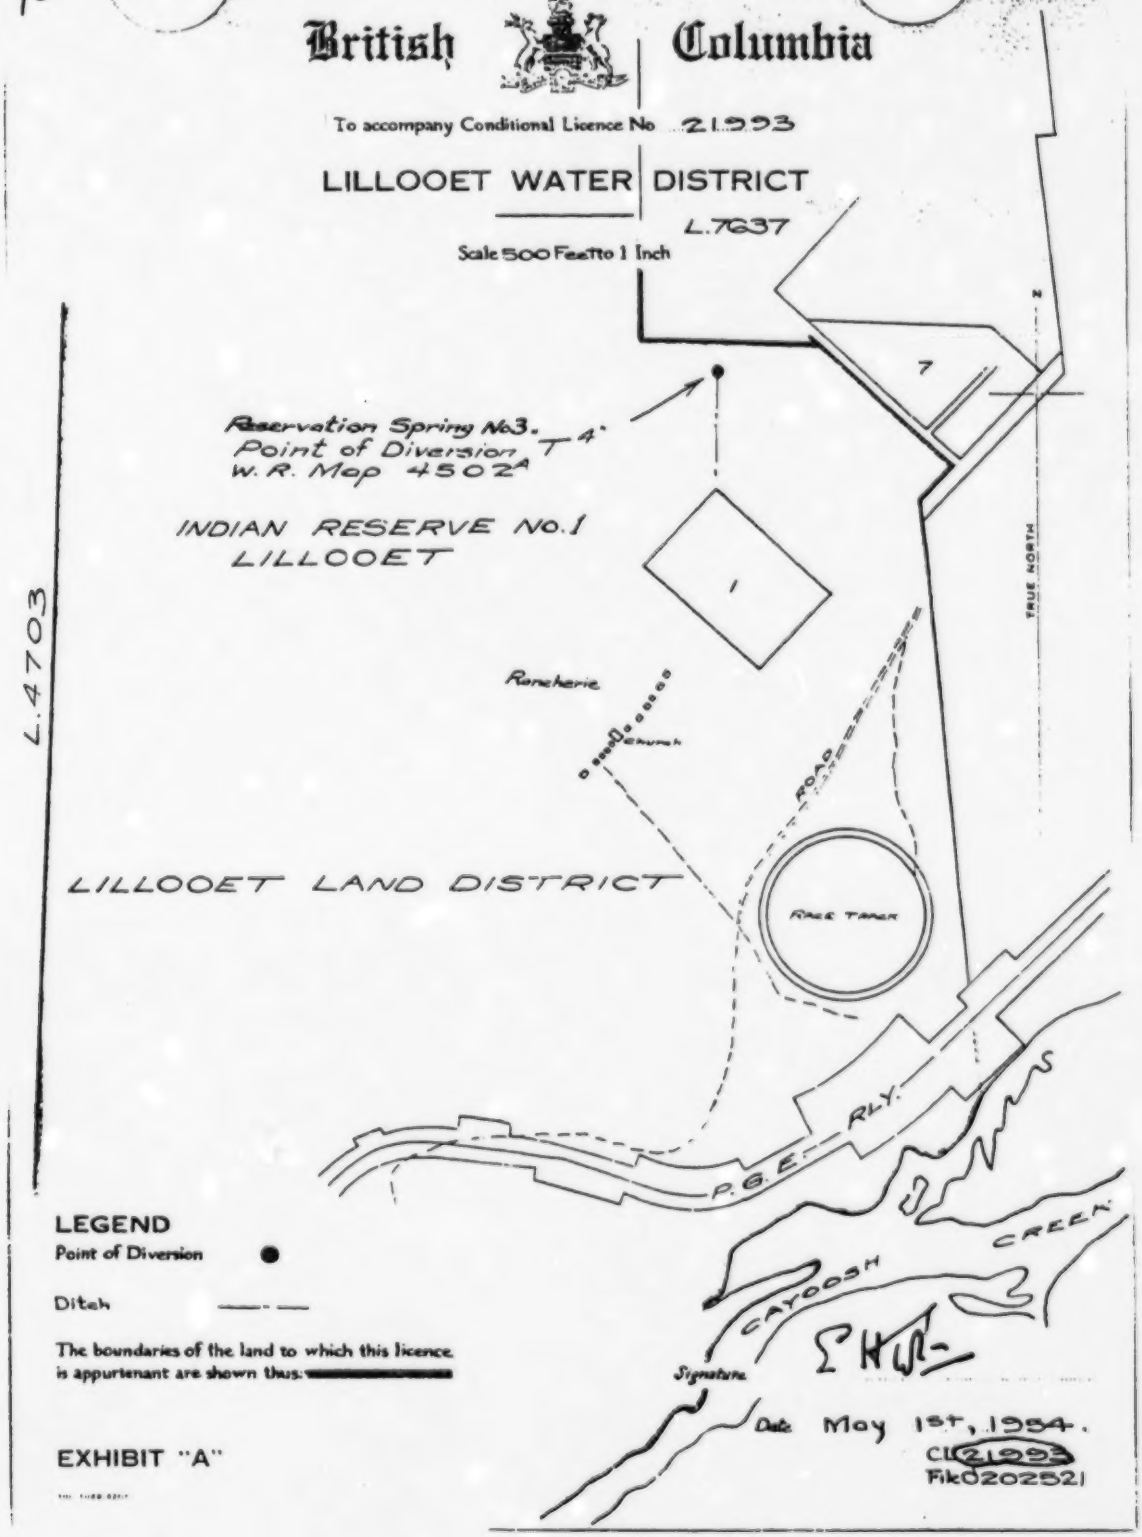

LEGEND

Point of Diversion ●

Ditch ——·——

The boundaries of the land to which this licence is appurtenant are shown thus: ▬▬▬

EXHIBIT "A"

Signature

Date May 1st, 1954.

CL 21993

File 0202521

W.R.B. 13—SM-353-2622 (2)

PROVINCE OF BRITISH COLUMBIA

Water Rights Branch

DEPARTMENT OF LANDS AND FORESTS

CONDITIONAL WATER LICENCE

DIRECTOR OF INDIAN AFFAIRS of Ottawa, Ontario.

is hereby authorized to divert and use water as follows:—

(*a*) The source of the water-supply is Reservation Spring No. 1.

(*b*) The point of diversion is located as shown on the attached plan.

(*c*) The date from which this licence shall have precedence is 6th January, 1954.

(*d*) The purpose for which the water is to be used is irrigation.

(*e*) The maximum quantity of water which may be diverted is 4.5 acre feet per annum and such additional quantity as the Engineer may from time to time determine should be allowed for losses.

(*f*) The period of the year during which the water may be used is 1st April to 30th September.

(*g*) The land upon which the water is to be used and to which this licence is appurtenant is Indian Reserve No. 1, Lillooet, of which 1.5 acres may be irrigated.

(*h*) The works authorized to be constructed are ditch and they shall be located approximately as shown on the attached plan.

(*i*) The construction of the said works shall be commenced on or before the 31st day of July, 19 54, and shall be completed and the water beneficially used on or before the 31st day of December, 19 56.

4502
R.M.

(E.H. Tredcroft)
Comptroller of Water Rights.

File No. 0202519 Date issued May 1, 1954. Licence No. 21994

10


British Columbia

To accompany Conditional Licence No. 21224

LILLOOET WATER DISTRICT

L.7637

Scale: 500 Feet to 1 Inch

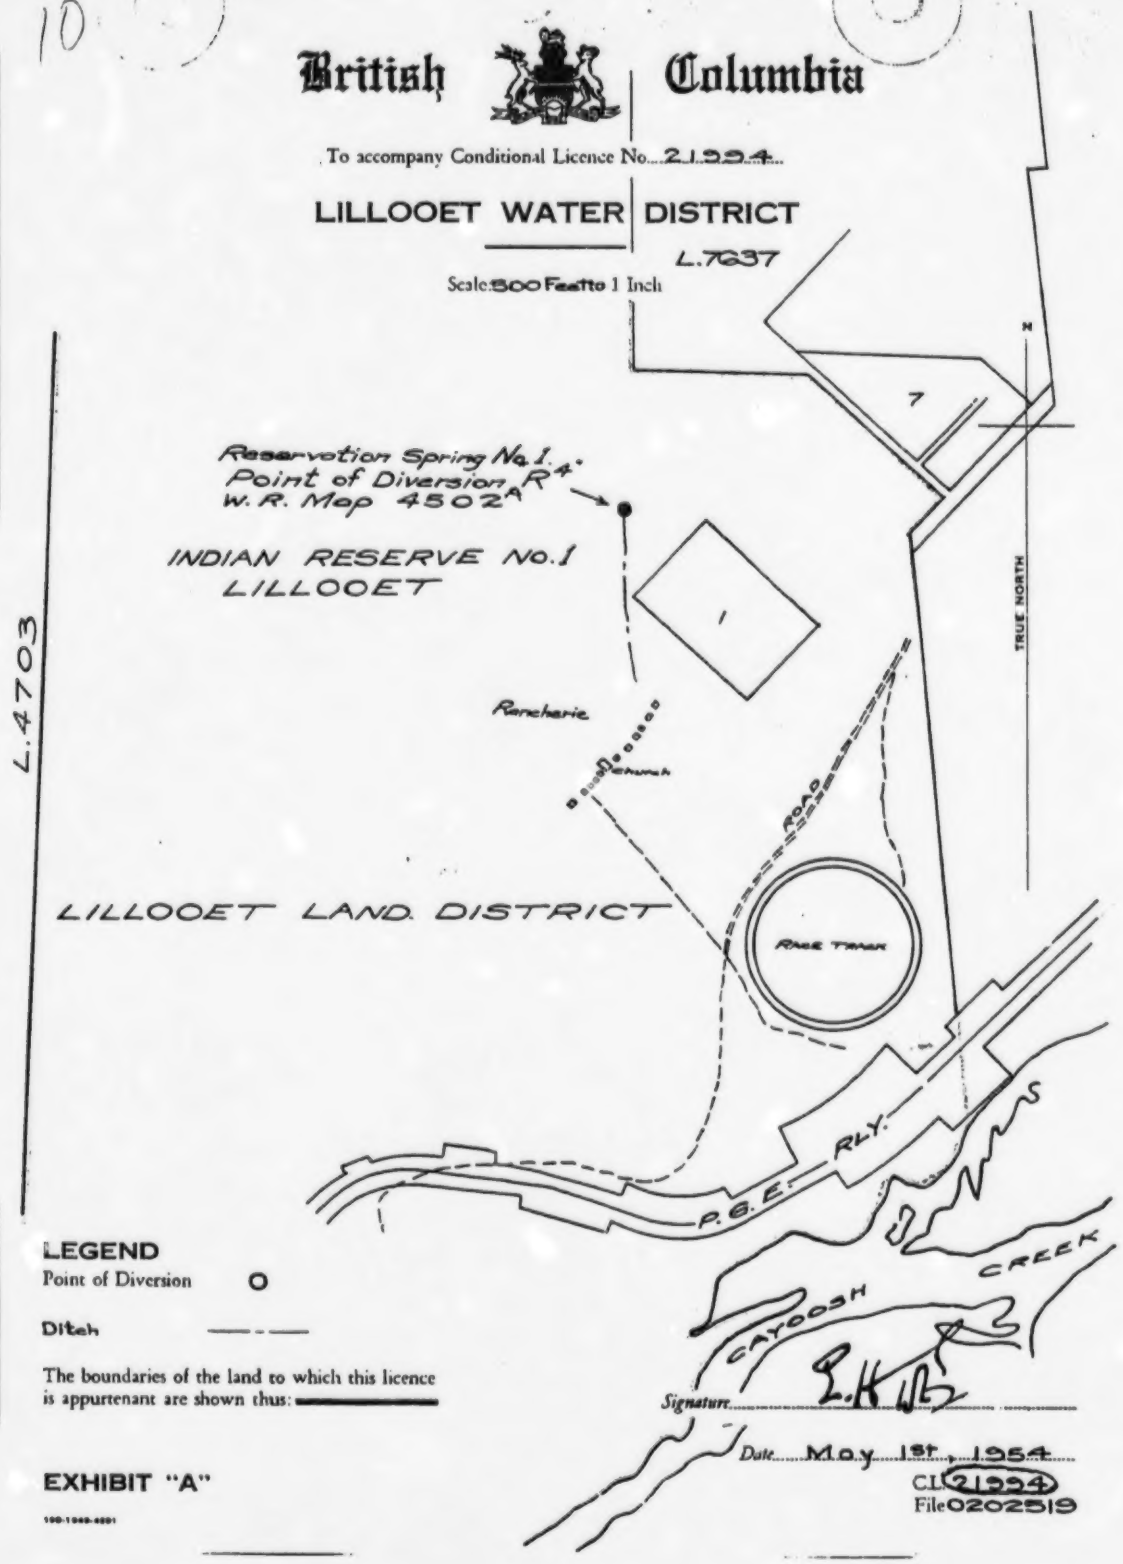

LEGEND

Point of Diversion O

Ditch ———

The boundaries of the land to which this licence is appurtenant are shown thus: ———

Signature L. K. [illegible]

Date May 1st, 1954

CL 21224

File 0202519

EXHIBIT "A"

100-1949-4001

WATER RIGHTS BRANCH
DEPARTMENT OF LANDS AND FORESTS

O R D E R

W A T E R A C T

Section 13

File No. 0202520

The provisions of the B. C. Water Act having been complied with and being satisfied that no person's rights will be affected, I hereby extend the time for the completion of the works and for making beneficial use of the water authorized under Conditional Water Licence No. 21995 , Reservation Spring #2 to the 31st day of December, 1958.

V. Raudsepp,

Deputy Comptroller of Water Rights.

DATED at Victoria, B. C.,
this 12th day of April , 1957

W.R.B. 42

W.R.B. .622 (2)

PROVINCE OF BRITISH COLUMBIA

Water Rights Branch

DEPARTMENT OF LANDS AND FORESTS

CONDITIONAL WATER LICENCE

DIRECTOR OF INDIAN AFFAIRS of Ottawa, Ontario.

is hereby authorized to divert and use water as follows:—

(*a*) The source of the water-supply is Reservation Spring No. 2.

(*b*) The point of diversion is located as shown on the attached plan.

(*c*) The date from which this licence shall have precedence is 6th January, 1954.

(*d*) The purpose for which the water is to be used is irrigation.

(*e*) The maximum quantity of water which may be diverted is 9.6 acre feet per annum and such additional quantity as the Engineer may from time to time determine should be allowed for losses.

(*f*) The period of the year during which the water may be used is 1st April to 30th September.

(*g*) The land upon which the water is to be used and to which this licence is appurtenant is Indian Reserve No. 1, Lillooet, of which 3.2 acres may be irrigated.

(*h*) The works authorized to be constructed are ditch,

and they shall be located approximately as shown on the attached plan.

(*i*) The construction of the said works shall be commenced on or before the 31st day of July, 19 54, and shall be completed and the water beneficially used on or before the 31st day of December, 19 56.

RECORDED IN 1-502A R.M.

(E.H. Tredcroft)
Comptroller of Water Rights.

File No. 0202520 Date issued May 1, 1954. Licence No. 21995

10


British Columbia

To accompany Conditional Licence No. 21995

LILLOOET WATER DISTRICT

L.7637

Scale: 500 Feet to 1 Inch

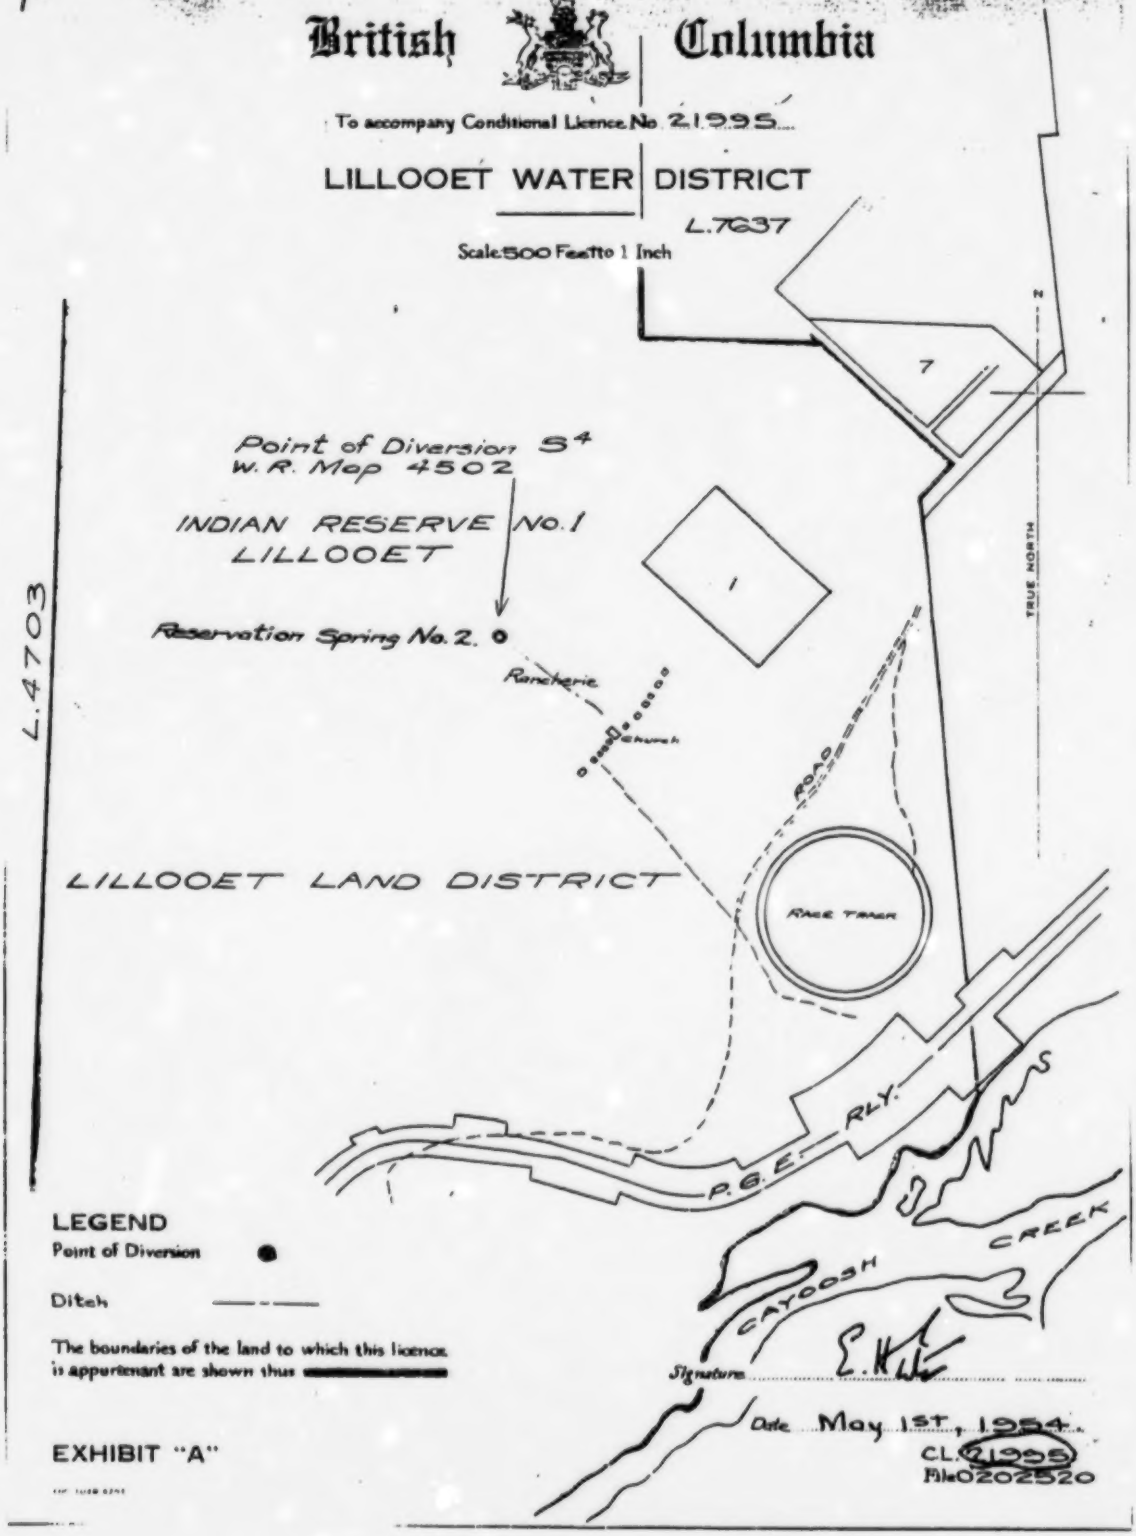

LEGEND

Point of Diversion ●

Ditch ———

The boundaries of the land to which this licence is appurtenant are shown thus ▬▬

Signature E. K. [illegible]

Date May 1st, 1954.

CL. 21995

File 0202520

EXHIBIT "A"

WATER RESOURCES SERVICE
WATER RIGHTS BRANCH

DEPARTMENT OF LANDS, FORESTS
AND WATER RESOURCES

THE PROVINCE OF BRITISH COLUMBIA—WATER ACT

CONDITIONAL WATER LICENCE

Director, Indian Affairs Branch, Department of Citizenship and Immigration of **Ottawa, Ontario**

is/are hereby authorized to **divert and use** water as follows:—

(*a*) The source(s) of the water-supply is/are **Dew Brook.**

(*b*) The point(s) of **diversion** is/are located as shown on the attached plan.

(*c*) The date from which this licence shall have precedence is **28th February, 1963.**

(*d*) The purpose for which the water is to be used is **irrigation.**

(*e*) The maximum quantity of water which may be **diverted is 24 acre feet per annum,** and such additional quantity as the Engineer may from time to time determine should be allowed for losses.

(*f*) The period of the year during which the water may be **used is 1st April to 30th September.**

(*g*) The land upon which the water is to be used and to which this licence is appurtenant is **Indian Reserve No.4, McCartney's Flat, Lillooet District, of which 8 acres may be irrigated.**

(*h*) The works authorized to be constructed are **pipe,** and they shall be located approximately as shown on the attached plan.

(*i*) The construction of the said works **shall be commenced on or before the 31st day of August, 1966, and shall be completed and the water beneficially used on or before the 31st day of December, 1968.**

102
R.M. AD-

H. D. DeBeck,
Comptroller of Water Rights.


File No. **0248443** Date issued: **1 March 1966** Conditional Licence No. **30654**

5M 365-3219

British Columbia

ASHCROFT WATER DISTRICT
LILLOOET DISTRICT

Scale 20 Chains to 1 Inch

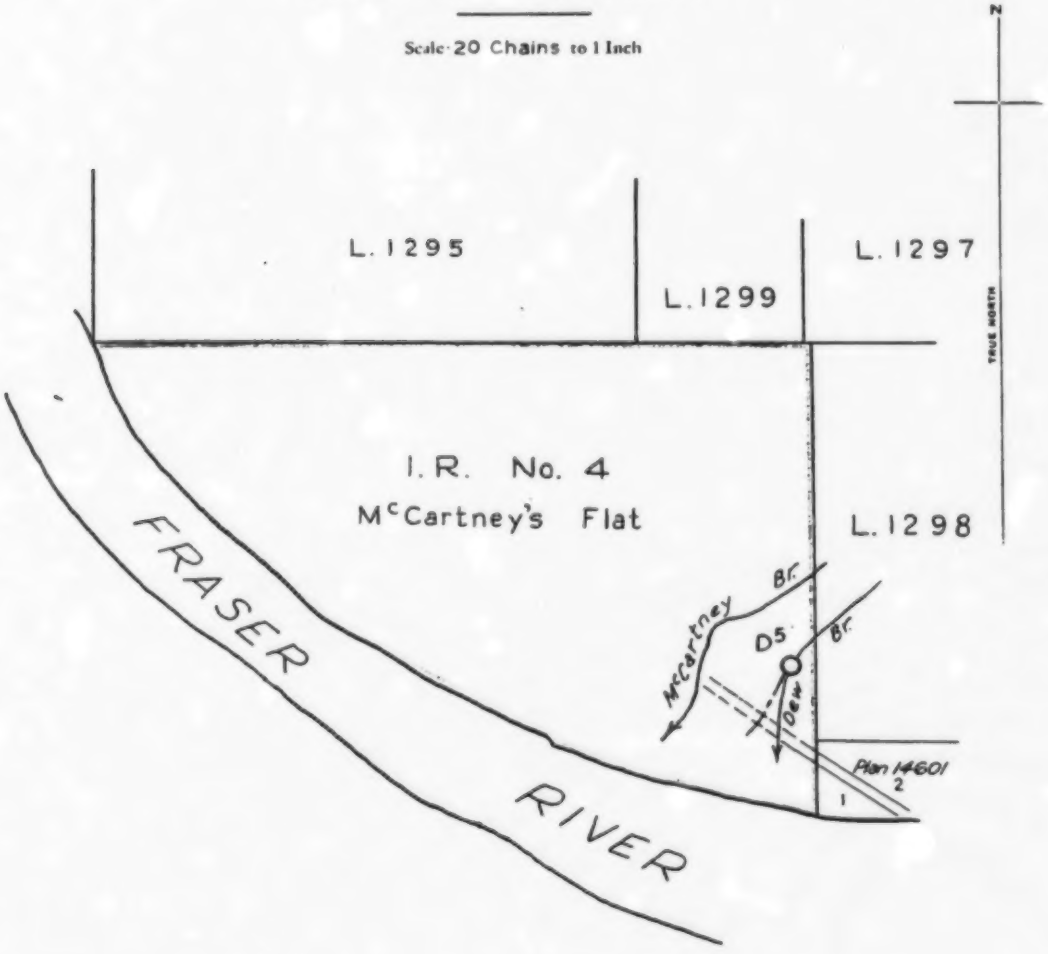

LEGEND

Point of Diversion O
W.R. Map 102
Pipe — - —

The boundaries of the land to which this licence is appurtenant are shown thus: ———

Signature

Date Mar. 1, 1966

EXHIBIT "A"

CL 30654
File 0248443

100-004-4184

WATER MANAGEMENT BRANCH

BC ENVIRONMENT, LANDS & PARKS

THE PROVINCE OF BRITISH COLUMBIA - WATER ACT

CONDITIONAL WATER LICENCE

LILLOOET INDIAN BAND and THE DEPARTMENT OF INDIAN & NORTHERN AFFAIRS of P.O. Box 615, Lillooet, British Columbia V0K 1V0

is hereby authorized to divert and use water as follows:

(a) The stream on which the rights are granted is Seton Lake.

(b) The point of diversion is located as shown on the attached plan.

(c) The date from which this licence shall have precedence is 17th February, 1989.

(d) The purpose for which this licence is issued is waterworks.

(e) The maximum quantity of water which may be diverted is 4,500 gallons a day.

(f) The period of the year during which the water may be used is the whole year.

(g) The undertaking of the licensee within Seton Lake Indian Reserve No. 5, Lillooet District.


(h) The authorized works are diversion structure, pumps, tanks, pipe and sprinkler system, which shall be located approximately as shown on the attached plan.

(i) The construction of the said works has been completed and the water is being beneficially used. The licensee shall continue to make beneficial use of the water in the manner authorized herein.

A.D. Zachodnik
Regional Water Manager
Southern Interior Region

File No: 3001434 Date: MAR 2 0 1992 CONDITIONAL WATER LICENCE 65098

Province of British Columbia

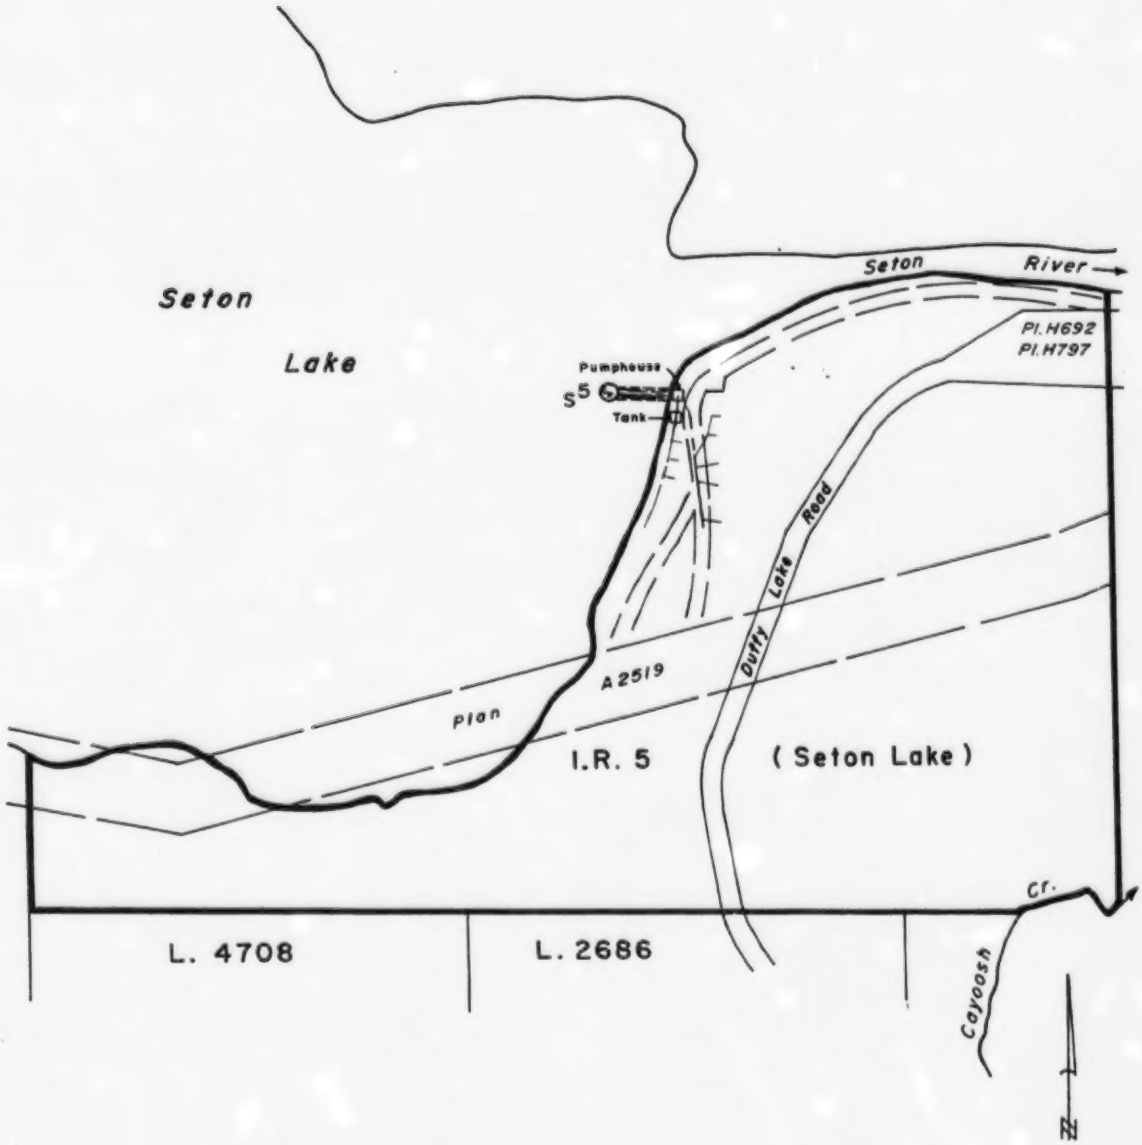

WATER DISTRICT : ASHCROFT
PRECINCT : BRIDGE RIVER
LAND DISTRICT : LILLOOET

LEGEND

Scale : 1:5000
Point of Diversion : ⊕
Map Number : W R 102
Pipe : ———
Permit over Crown Land: ▬▬▬

Signature A.D. Zachodnik
Date MAR 2 0 1992

C.L. 65098
File 3001434
P.C.L. 18104

The boundaries of the land to which this licence is appurtenant are shown thus: ———

Province of British Columbia Ministry of Environment, Lands & Parks

PERMIT UNDER THE WATER ACT AUTHORIZING THE OCCUPATION OF CROWN LAND

The holders of Conditional Water Licence 65098 whose licence authorizes the diversion of water from Seton Lake, are hereby authorized to occupy Crown Land by constructing, maintaining and operating thereon the works authorized under the said licence and any licence which may be issued in substitution thereof.

(a) The Crown Land which is authorized to be occupied under this permit is a portion of unsurveyed foreshore and land, Lillooet District covered by the waters of Seton Lake, the location of which is shown approximately on the plan attached to the said water licence.

(b) The approximate area of the Crown Land authorized to be occupied under this permit is 150 feet in length by 15 feet in for an area of 0.05 of an acre.

(c) The permittee may cut and remove from the said Crown Land any timber necessary to permit construction and maintenance of the said works. Prior to the cutting, destruction or flooding of any timber, the permittee shall apply for and obtain a licence to cut timber from the District Manager and the amount of stumpage, royalty and (or) compensation payable to the Crown in respect of trees, including merchantable or young growth, cut, removed, damaged, or destroyed by the permittee, shall be the sum or sums fixed by the Ministry of Forests of the Province of British Columbia.

(d) This permit is appurtenant to the land, mine or undertaking to which the aforesaid water licence is appurtenant.

(e) This permit shall become void if the water licence with respect to which the permit is issued should terminate, be abandoned or cancelled, or amended so as to render this permit unnecessary.

(f) This permit is issued and accepted on the understanding that the permittee shall indemnify and save harmless the Government of the Province of British Columbia for all loss, damage to works, cost or expense suffered by the permittee by reason of the Crown Land or any portion thereof being submerged or damaged by erosion or otherwise affected by flooding.

(g) The holder of this permit shall not be entitled to compensation if the Crown grants permits to other persons to occupy the land affected by this permit.

(h) In the event of a dispute at any time with respect to the area or boundaries of the land affected by this permit, the holder shall, at his own expense, have the said land surveyed by a duly qualified surveyor.

A.D. Zackodnik
Regional Water Manager
duly authorized designate of the
Minister of Environment, Lands & Parks

File: 3001434 Date Issued: MAR 20 1992 Permit No: 18104

WATER MANAGEMENT BRANCH

MINISTRY OF ENVIRONMENT and Parks

THE PROVINCE OF BRITISH COLUMBIA—WATER ACT

CONDITIONAL WATER LICENCE

Lillooet Indian Band, I.A. (987-593-8143)
Box 615, Lillooet, British Columbia V0K 1V0

is hereby authorized to divert and use water as follows:

(a) The stream on which the rights are granted is Tyee Jimmie Creek.

(b) The points of diversion are located as shown on the attached plan.

(c) The date from which this licence shall have precedence is 13th May, 1903.

(d) The purposes for which this licence is issued are irrigation and waterworks.

(e) The maximum quantity of water which may be diverted for irrigation is 57.53 acre-feet per annum and for waterworks is 11,000 gallons a day.

(f) The period of the year during which the water may be used is 1st April to 30th September.

(g) The land upon which the water is to be used and to which this licence is appurtenant is Lillooet Indian Reserve No. 1, Lillooet District of which 19.2 acres may be irrigated.

(h) The authorized works are diversion structures, ditch, pipe and sprinkler system located approximately as shown on the attached plan.


(i) The construction of the said works shall be completed and the water beneficially used prior to the 31st day of December, 1990. Thereafter, the licensee shall continue to make beneficial use of the water in the manner authorized herein.

(j) This licence is issued in substitution of Final Water Licence 9626, in part, under Section 15 of the Water Act.

A.D. Zackodnik, P. Eng.
Regional Water Manager

File: 0241105 Date Issued: FEB 12 1988 Conditional Licence: 65664

Province of British Columbia

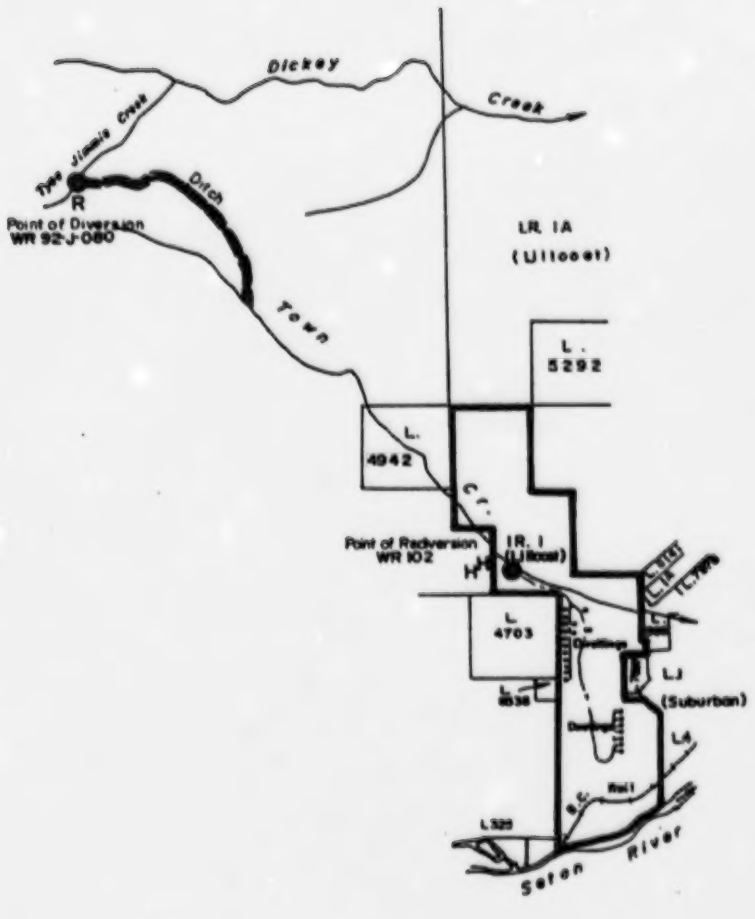

WATER DISTRICT : ASHCROFT
PRECINCT : BRIDGE RIVER
LAND DISTRICT : LILLOOET

LEGEND

Scale : 1:50000
Point of Diversion, Rediversion ●●
Map Number : WR 92-J-080, 102
Pipe : — - —
Permit over Crown Land: [redacted]

The boundaries of the land to which this licence is appurtenant are shown thus: _____

Signature [signature]
Date FEB 12 1988

C.L. 65564 for F.L. 9626 in part
File 0241105
P.C.L. 5212

WATER MANAGEMENT BRANCH

MINISTRY OF ENVIRONMENT

THE PROVINCE OF BRITISH COLUMBIA—WATER ACT

CONDITIONAL WATER LICENCE

Lillooet Indian Band, I.A. (987-593-8143)
Box 615, Lillooet, British Columbia V0K 1V0

is hereby authorized to divert and use water as follows:

(a) The stream on which the rights are granted is Tyee Jimmie Creek.

(b) The points of diversion are located as shown on the attached plan.

(c) The date from which this licence shall have precedence is 8th June, 1987.

(d) The purpose for which this licence is issued is waterworks.

(e) The maximum quantity of water which may be diverted is 11,000 gallons a day.

(f) The period of the year during which the water may be used is 1st October to 31st March.

(g) The land upon which the water is to be used and to which this licence is appurtenant is Lillooet Indian Reserve No. 1, Lillooet District.

(h) The authorized works are diversion structures, ditch and pipe located approximately as shown on the attached plan.


(i) The construction of the said works shall be completed and the water beneficially used prior to the 31st day of December, 1990. Thereafter, the licensee shall continue to make beneficial use of the water in the manner authorized herein.

(j) This licence is issued in substitution of Final Water Licence 9626, in part, under Sections 10 and 15 of the Water Act.

A.D. Zackodnik, P. Eng.
Regional Water Manager

File: 0241105 Date Issued: FEB 12 1988 Conditional Licence: 65665

Province of British Columbia

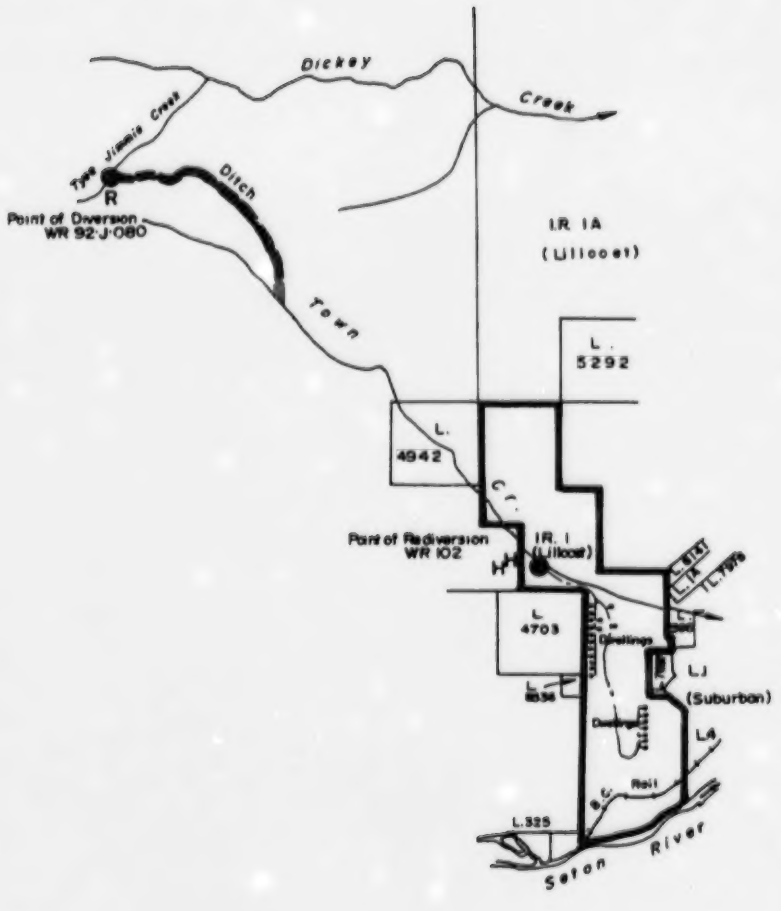

WATER DISTRICT : ASHCROFT
PRECINCT : BRIDGE RIVER
LAND DISTRICT : LILLOOET

LEGEND

Scale : 1:50000
Point of Diversion, Rediversion ● ●
Map Number : WR 92-J-080, 102
Pipe and Ditch : — - —
Permit over Crown Land: [redacted]

The boundaries of the land to which this licence is appurtenant are shown thus: ———————

Signature [signature]

Date FEB 12 1968

C.L. 65665 for F.L. 9626 in part
File 0241105
P.C.L. 5212

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

(Irrigation.)

WHEREAS SUPERINTENDENT GENERAL OF INDIAN AFFAIRS whose address is Ottawa, Canada.

is the owner of the lands to which Conditional Licence No. 8326 was made appurtenant, and is the applicant for this licence; and

Whereas satisfactory proof has been duly filed, and it has been shown to the satisfaction of the Comptroller that the terms of the said conditional licence have been complied with satisfactorily, and particularly that the works for the diversion and carriage of the water under the said licence have been completed and that beneficial use of the water has been made thereunder:

Now, therefore, in pursuance of the "Water Act," this final licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(*a.*) The source of the water-supply is Riley creek a tributary of Fraser river

(*b.*) The point of diversion from the stream is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(*c.*) The date from which this licence and the right to take and use water thereunder shall take precedence is 19th June, 1925.

(*d.*) The purpose for which the water is to be used is irrigation, & incidentally domestic.

(*e.*) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (*g*) hereof are under irrigation is, until lawfully altered, 22.5 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. ——— from ——— (Stream.) and Licence No. ——— from ——— (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data has been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum

Licence Number 8115

W.R.B. 1022 (1) Final Licence—Irrigation—2M-150-9573

File 061722.

ORIGINAL

is 22.5 acre-feet plus such reasonable allowance for evaporation and seepage as may be set by the District Engineer.

(*f.*) The period of the year during which the water may be used is for irrigation is 1st April to 30th September

(*g.*) The area and description of the irrigable lands to which this licence shall be appurtenant, subject to beneficial use being made of the water in the irrigation of the said lands, are 7.5 acres, comprising part of Lillooet Indian Reserve No. 1B, (formerly Lot 3042, Group 1, Lillooet District).; the extent and location of the said lands are further shown by cross-hatching in the said exhibit "A."

(*h.*) The works for the diversion and the carriage of the water consist of Ditch

(*i.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*j.*) The nature and extent of the incidental use (if any) permitted under this licence are 1000 gallons of water a day to be used throughout the whole year for domestic purpose.

but such use shall not enlarge the quantity of water allowed under item (*e*) above.

(*k.*) The diversion of the quantity of water permitted under this licence shall be limited to such rates of flow in the months of the irrigation season as may be determined, after hydrographic surveys, to be reasonable for the production of ordinary crops on the said lands, and the Comptroller may, after such surveys have been made, require the surrender of this licence and may amend the same by specifying therein such maximum rates of flow.

(*l.*) The terms and conditions of this licence shall replace those of the conditional licence hereinbefore referred to.

(*m.*)

Issued this 16th day of May, 19 32

File 061722.

J. Macdonald

Comptroller of Water Rights.

Licence Number 8115

W.R.D.-1022 (2) Final Licence—Irrigation—2M-130-0373

ORIGINAL


8/

British Columbia.

To accompany Final Licence No. 8115

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

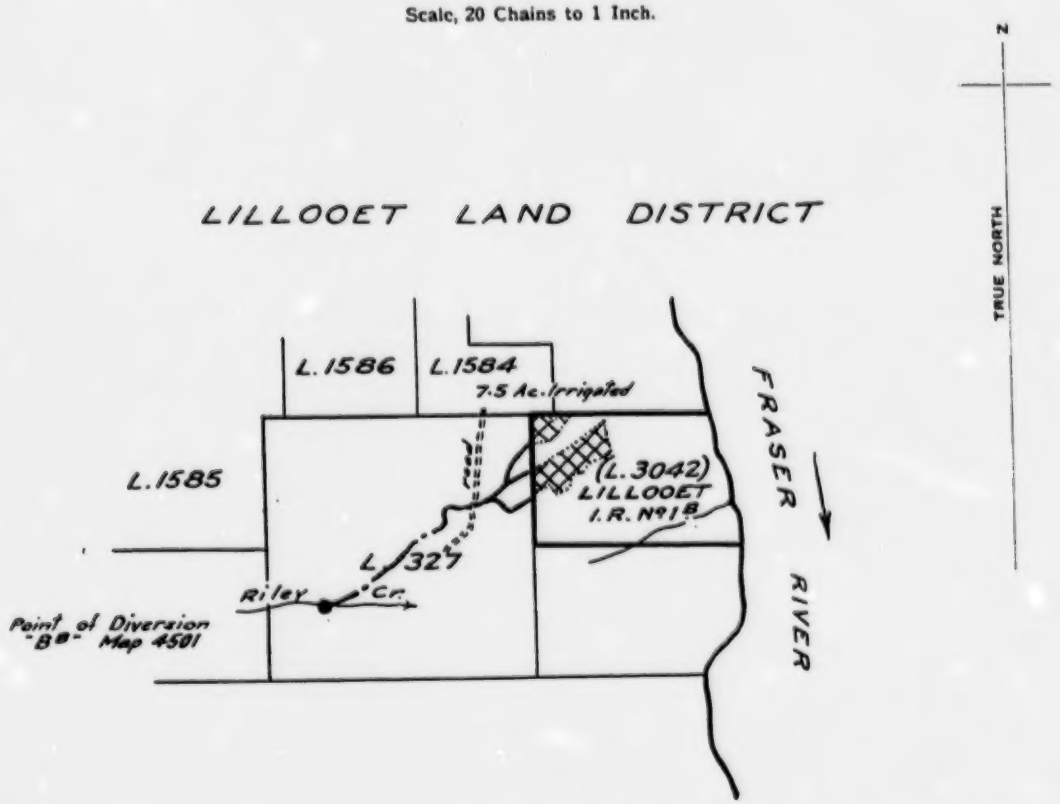

Signature [signature]

Date 16th May 1932

re 8115 for C.L. 8326

File 061722

EXHIBIT "A"

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

(Irrigation.)

WHEREAS SUPERINTENDENT-GENERAL OF INDIAN AFFAIRS, whose address is Ottawa, Ontario.

is the owner of the lands to which Conditional Licence No. 5289 was made appurtenant, and is the applicant for this licence; and

Whereas satisfactory proof has been duly filed, and it has been shown to the satisfaction of the Comptroller that the terms of the said conditional licence have been complied with satisfactorily, and particularly that the works for the diversion and carriage of the water under the said licence have been completed and that beneficial use of the water has been made thereunder:

Now, therefore, in pursuance of the "Water Act," this final licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(a.) The source of the water-supply is Kilchult creek, a tributary of Fraser river.

(b.) The point of diversion from the stream is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(c.) The date from which this licence and the right to take and use water thereunder shall take precedence is 25th June 1920.

(d.) The purpose for which the water is to be used is irrigation. & incidentally domestic.

(e.) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (g) hereof are under irrigation is, until lawfully altered, 34 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. ..... from ..... (Stream.)

and Licence No. ..... from ..... (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data has been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum

W.R.B. 1023 (1) Final Licence—Irrigation—2M-422-3961

Licence Number 8150

File No. 022720.

is 34 acre-feet plus such reasonable allowance for evaporation and seepage as may be set by the District Engineer.

(*f.*) The period of the year during which the water may be used for Irrigation is 1st April to 30th September.

(*g.*) The area and description of the irrigable lands to which this licence shall be appurtenant, subject to beneficial use being made of the water in the irrigation of the said lands, are 11.3 acres, comprising part of Lillooet Indian Reserve No. 3.; the extent and location of the said lands are further shown by cross-hatching in the said exhibit "A."

(*h.*) The works for the diversion and the carriage of the water consist of ditches.

(*i.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*j.*) The nature and extent of the incidental use (if any) permitted under this licence are 1,000 gallons a day of water to be used throughout the whole year for domestic purpose.

but such use shall not enlarge the quantity of water allowed under item (*e*) above.

(*k.*) The diversion of the quantity of water permitted under this licence shall be limited to such rates of flow in the months of the irrigation season as may be determined, after hydrographic surveys, to be reasonable for the production of ordinary crops on the said lands, and the Comptroller may, after such surveys have been made, require the surrender of this licence and may amend the same by specifying therein such maximum rates of flow.

(*l.*) The terms and conditions of this licence shall replace those of the conditional licence hereinbefore referred to.

(*m.*)

Issued this 30th day of June, 19 32.

File No. 022720.

J. Macdonald

Comptroller of Water Rights.

W.R.B. 1023 (2) Final Licence—Irrigation—2M-432-3061

Licence Number 8160

4501

ORIGINAL


8/

British Columbia.

To accompany Final . Licence No. 8160

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

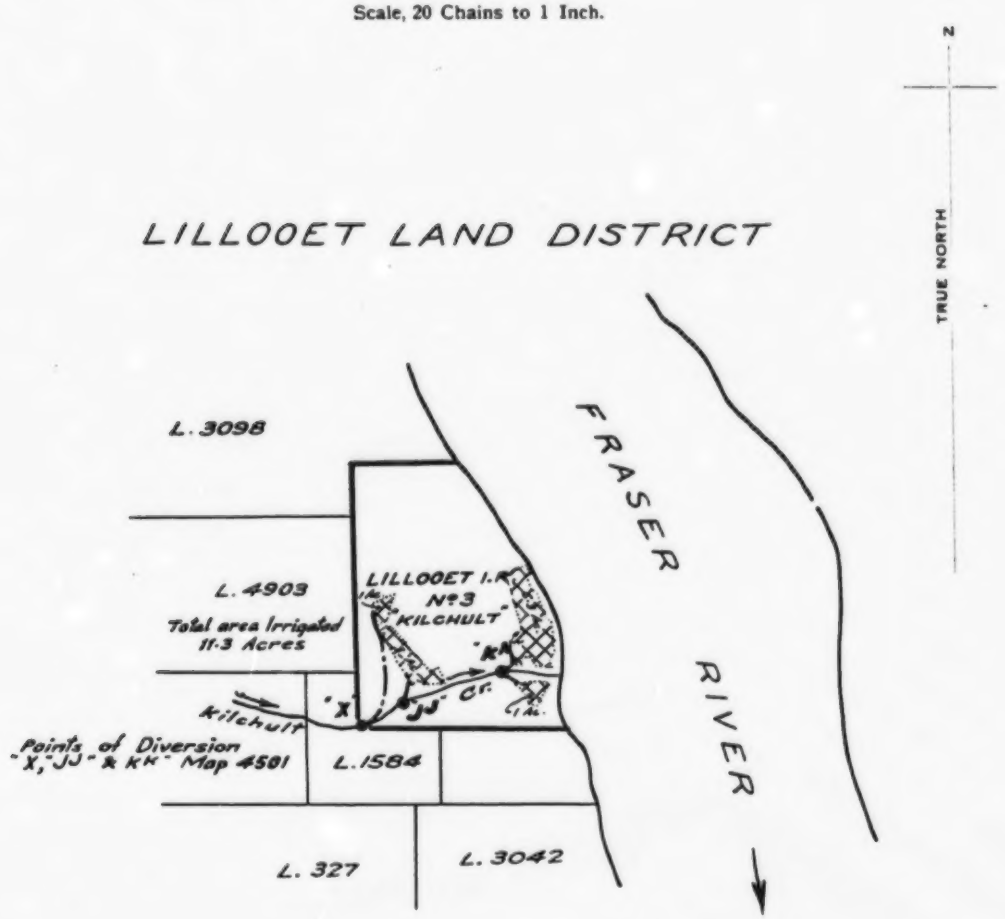

R.R.F.
C.H.

Signature A. Macdonald

Date 30 June 1932

R.L. 8160 for C.L. 5289

File 022780

EXHIBIT "A"

ORDER

WATER ACT

Section 15

FILE NO. 0241101

In the matter of Final Water Licence 8162, McCartney Brook and Brown Brook, which authorizes the diversion of 214 acre feet per annum of water for irrigation purpose, of which 1000 gallons a day may be used for domestic purpose.

Having received an application for a change of works and being satisfied that no person's rights will be injuriously affected, I hereby amend clauses (b) and (h) of the said licence to read as follows:-

(b) The points of diversion are located as shown on the attached amended plan.

(h) The works authorised hereunder are intakes and pipe located as shown on the attached amended plan.

Dated at Victoria, B.C., this 7th day of December, 1965.


H. D. DeBeck,
Comptroller of Water Rights.

9

British Columbia

ASHCROFT WATER DISTRICT
LILLOOET LAND DISTRICT

Scale: 2640 Ft (to the) to 1 Inch

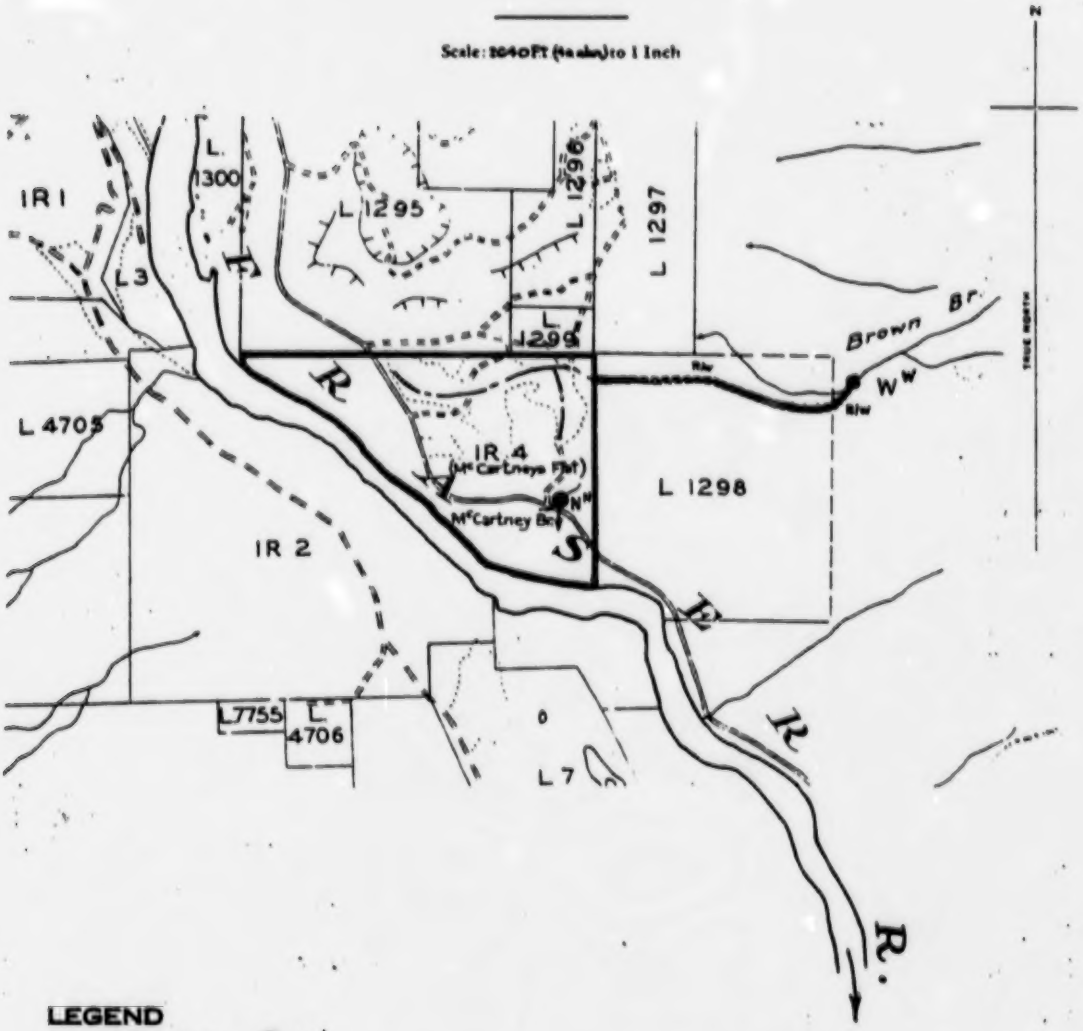

LEGEND

Point of Diversion } ●
W. R. Map 102
Pipeline —·—
Right-of-Way ▬▬
The boundaries of the land to which this licence is appurtenant are shown thus ▬▬

Signature [signature]

Date Dec. 7, 1965

EXHIBIT "A"

Amended

F.L. 8162
File 0241101
Permit No. 5959

For R/W See Ref Map 92 1/NW(E-1)

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

(Irrigation.)

WHEREAS SUPERINTENDENT-GENERAL OF INDIAN AFFAIRS, whose address is Ottawa, Canada.

is the owner of the lands to which Conditional Licence No. 7163 was made appurtenant, and is the applicant for this licence; and

Whereas satisfactory proof has been duly filed, and it has been shown to the satisfaction of the Comptroller that the terms of the said conditional licence have been complied with satisfactorily, and particularly that the works for the diversion and carriage of the water under the said licence have been completed and that beneficial use of the water has been made thereunder:

Now, therefore, in pursuance of the "Water Act," this final licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(a.) The source of the water-supply is are McCartney brook on McCartneys Flat I.R. (No. 4 Lillooet) and Brown brook lying east of said Reserve. are

(b.) The point of diversion from the streams is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(c.) The date from which this licence and the right to take and use water thereunder shall take precedence is 23rd February, 1891.

(d.) The purpose for which the water is to be used is irrigation. & incidentally domestic.

(e.) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (g) hereof are under irrigation is, until lawfully altered, 214 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. ---- from ----- (Stream.)

and Licence No. ---- from ----- (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data has been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum

Licence Number 8162

W.R.B. 1923 (1) Final Licence—Irrigation—2M-432-8961

File 30-15-1.

is 214 acre-feet plus such reasonable allowance for evaporation and seepage as may be set by the District Engineer.

(f.) The period of the year during which the water may be used ~~is~~ for irrigation is 1st April to 30th September

(g.) The area and description of the irrigable lands to which this licence shall be appurtenant, subject to beneficial use being made of the water in the irrigation of the said lands, are 71.2 acres, comprising part of McCartneys Flat I.R. (No. 4 Lillooet).; the extent and location of the said lands are further shown by cross-hatching in the said exhibit "A."

(h.) The works for the diversion and the carriage of the water consist of Pipe and flume

(i.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(j.) The nature and extent of the incidental use (if any) permitted under this licence are 1000 gallons a day of water to be used throughout the whole year for domestic purpose.

but such use shall not enlarge the quantity of water allowed under item (e) above.

(k.) The diversion of the quantity of water permitted under this licence shall be limited to such rates of flow in the months of the irrigation season as may be determined, after hydrographic surveys, to be reasonable for the production of ordinary crops on the said lands, and the Comptroller may, after such surveys have been made, require the surrender of this licence and may amend the same by specifying therein such maximum rates of flow.

(l.) The terms and conditions of this licence shall replace those of the conditional licence hereinbefore referred to.

(m.)

Issued this 30th day of June, 19 32.

File 30-15-1.

J. Macdonald

Comptroller of Water Rights.

W.R.B. 1023 (2) Final Licence—Irrigation—2M-422-2061

Licence Number 8162

4502/04


8/

British Columbia.

To accompany Final Licence No. 8162

LILLOOET — WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

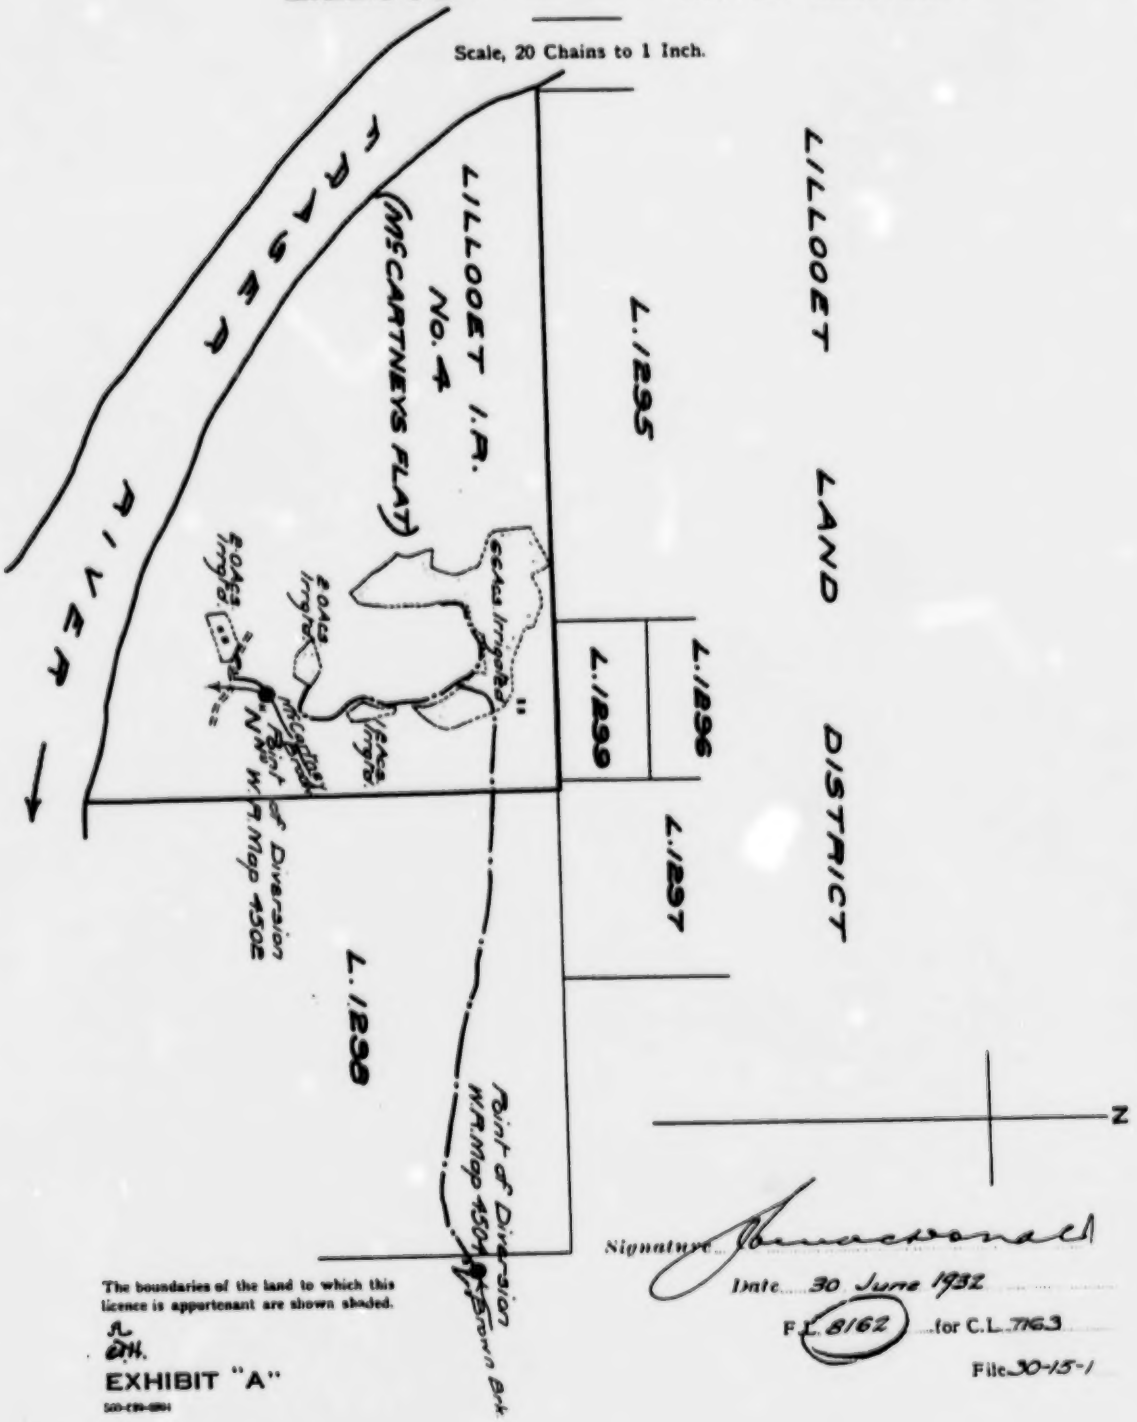

The boundaries of the land to which this licence is appertenant are shown shaded.

EXHIBIT "A"

Signature J. Macdonald

Date 30 June 1932

F.L. 8162 for C.L. 7163

File 30-15-1

DEPARTMENT OF LANDS, FORESTS, AND WATER RESOURCES

Permit under the "Water Act" Authorizing the Occupation of Crown Land

The Director, Indian Affairs Branch, of Ottawa, Ontario

the holder of a water licence authorizing the diversion of water from McCartney Brook and Brown Brook

is hereby authorized to occupy by maintaining and operating thereon the works authorized under Final Water Licence no. 8162, and any licences which may be issued in substitution thereof,

the following Crown land, namely:— a portion of unsurveyed Crown land and Lot 1298, Lillooet District, being 5300 feet ± in length and 15 feet in width, the location of which is shown on the amended plan attached to the said water licence,

having an area of 1.8 ± acres.

And, subject to the payment of royalty, stumpage, and other compensation as provided under Condition 5,

is authorized to cut and remove from the said land any timber, the removal of which is necessary to maintain the said works.

There is payable in respect of this permit an annual rental of $2.00, which is subject to alteration at any time. Failure to pay the annual rental will render this permit subject to cancellation.

This permit is appurtenant to the land to which the aforesaid water licence is appurtenant.

The conditions relative to the rights granted under this permit are printed on the back of this form.

Issued the 7th day of December, 19 65.

Deputy Minister of Lands.

File 0241101

W.R. Map 102

Ref. Map 92 I/NW (C-1)

W.R.B. 12-0

~~Conditional~~ Final Licence No. 8162

PERMIT OVER CROWN LAND No. 5959

PROVINCE OF BRITISH COLUMBIA.

WATER RIGHTS BRANCH.

DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

(Irrigation.)

WHEREAS SUPERINTENDENT-GENERAL OF INDIAN AFFAIRS, whose address is Ottawa, Canada.

is the owner of the lands to which Conditional Licence No. 7167 was made appurtenant, and is the applicant for this licence; and

Whereas satisfactory proof has been duly filed, and it has been shown to the satisfaction of the Comptroller that the terms of the said conditional licence have been complied with satisfactorily, and particularly that the works for the diversion and carriage of the water under the said licence have been completed and that beneficial use of the water has been made thereunder:

Now, therefore, in pursuance of the "Water Act," this final licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(*a.*) The source of the water-supply is Towinook Creek

a tributary of Fraser River

(*b.*) The point of diversion from the stream is located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(*c.*) The date from which this licence and the right to take and use water thereunder shall take precedence is 12th September, 1870

(*d.*) The purpose for which the water is to be used is irrigation & incidentally domestic.

(*e.*) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (*g*) hereof are under irrigation is, until lawfully altered, 76.5 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. - - from - - - - (Stream.)

and Licence No. - - from - - - - (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data has been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum

W.R.B. 1023 (1) Final Licence—Irrigation—2M-432-8061

Licence Number 8163

File 19-16-1.

is 76.5 acre-feet plus such reasonable allowance for evaporation and seepage as may be set by the District Engineer.

(*f.*) The period of the year during which the water may be used ~~x~~ for irrigation is

1st April to 30th September

(*g.*) The area and description of the irrigable lands to which this licence shall be appurtenant, subject to beneficial use being made of the water in the irrigation of the said lands, are

25.5 acres, comprising part of Towinock Indian Reserve (No. 2, Lillooet).

; the extent and location of the said lands are further shown by cross-hatching in the said exhibit "A."

(*h.*) The works for the diversion and the carriage of the water consist of

ditches

(*i.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*j.*) The nature and extent of the incidental use (if any) permitted under this licence are

1000 gallons a day of water to be used throughout the whole year for domestic purpose.

but such use shall not enlarge the quantity of water allowed under item (*e*) above.

(*k.*) The diversion of the quantity of water permitted under this licence shall be limited to such rates of flow in the months of the irrigation season as may be determined, after hydrographic surveys, to be reasonable for the production of ordinary crops on the said lands, and the Comptroller may, after such surveys have been made, require the surrender of this licence and may amend the same by specifying therein such maximum rates of flow.

(*l.*) The terms and conditions of this licence shall replace those of the conditional licence hereinbefore referred to.

(*m.*)

Issued this 30th day of June, 1932.

File 19-16-1.

Comptroller of Water Rights.

W.R.B. 1032 (2) Final Licence—Irrigation—2M-432-3061

Licence Number 8163

ORIGINAL


8/

British Columbia.

To accompany Final Licence No. 8163

LILLOOET WATER DISTRICT.

Scale, 20 Chains to 1 Inch.

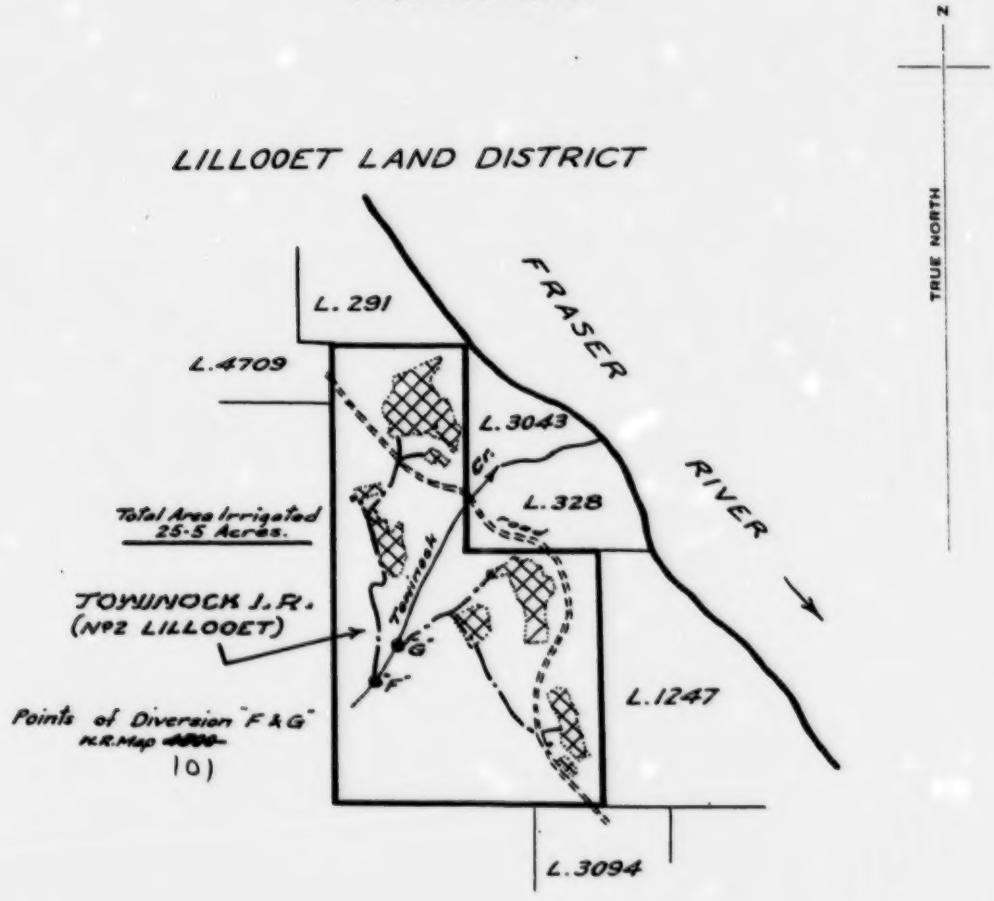

G.R.F.
CTH.

Signature James Macdonald

Date 30 June 1932

FL (8163) for C.L. 7167
File 19-16-1

EXHIBIT "A"

O R D E R

Section 13

File No. 9-16-1

Being satisfied that no persons rights will be affected, I hereby amend clause (a) of Final Water Licence No. 8293 to read:-

"The sources of the water supply are Rancherie(JJ) and Tribal(LL) Springs."

Deputy Comptroller of Water Rights.

Dated this
9th day of
October, 1953.

8293

PROVINCE OF BRITISH COLUMBIA. | WATER RIGHTS BRANCH. | DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

(Irrigation.)

WHEREAS SUPERINTENDENT-GENERAL OF INDIAN AFFAIRS, whose address is Ottawa, Canada.

is the owner of the lands to which Conditional Licence No. 7172 was made appurtenant, and is the applicant for this licence; and

Whereas satisfactory proof has been duly filed, and it has been shown to the satisfaction of the Comptroller that the terms of the said conditional licence have been complied with satisfactorily, and particularly that the works for the diversion and carriage of the water under the said licence have been completed and that beneficial use of the water has been made thereunder:

Now, therefore, in pursuance of the "Water Act," this final licence is issued, granting the licensee thereunder the right to take and use water under the following terms and conditions:—

(a.) The source of the water-supply ~~is~~ are J and L springs, located as shown ~~a tributary of~~ in the Exhibit marked "A" hereto attached.

(b.) The point of diversion from the stream ~~is~~ are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is attached to the counterfoil of this licence on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria.

(c.) The date from which this licence and the right to take and use water thereunder shall take precedence is 23rd February, 1891.

(d.) The purpose for which the water is to be used is irrigation & incidentally domestic.

(e.) The maximum quantity of water which may be used at the place of use when all the lands mentioned in item (g) hereof are under irrigation is, until lawfully altered, 30 acre-feet per annum; and the maximum quantity which may be used per acre at the said place of use in any year is 3 acre-feet: Provided that if any records have been issued, or if any other licences have been or may hereafter be issued, for the use of water upon the said lands, the maximum quantity allowed under this licence shall be reduced by such quantities as may from time to time be used upon the said lands under such other records or licences, including the records or licences at present outstanding, namely, Licence No. ——— from ——— (Stream.)

and Licence No. ——— from ——— (Stream.)

And provided further that in such cases the Comptroller may, after the requisite hydrographic data has been accumulated for determining the particular quantity of water which may be used under this licence, require the surrender thereof for the purpose of readjustment, and may amend the same by stating therein such particular quantity so determined. The maximum quantity which may be diverted from the stream per annum

Licence Number 8293

File 9-16-1.

is 30 acre-feet plus such reasonable allowance for evaporation and seepage as may be set by the District Engineer.

(*f.*) The period of the year during which the water may be used is for irrigation is 1st April to 30th September

(*g.*) The area and description of the irrigable lands to which this licence shall be appurtenant, subject to beneficial use being made of the water in the irrigation of the said lands, are 9.9 acres, comprising parts of the South east portion of Lillooet Indian Reserve No.1.; the extent and location of the said lands are further shown by cross-hatching in the said exhibit "A."

(*h.*) The works for the diversion and the carriage of the water consist of Ditches

(*i.*) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*j.*) The nature and extent of the incidental use (if any) permitted under this licence are 2000 gallons of water a day to be used throughout the whole year for domestic purpose.

but such use shall not enlarge the quantity of water allowed under item (*e*) above.

(*k.*) The diversion of the quantity of water permitted under this licence shall be limited to such rates of flow in the months of the irrigation season as may be determined, after hydrographic surveys, to be reasonable for the production of ordinary crops on the said lands, and the Comptroller may, after such surveys have been made, require the surrender of this licence and may amend the same by specifying therein such maximum rates of flow.

(*l.*) The terms and conditions of this licence shall replace those of the conditional licence hereinbefore referred to.

(*m.*)

Issued this 15th day of November, 19 32.

File 9-16-1.

J Macdonald

Comptroller of Water Rights.

W.R.B. 1023 (2) Final Licence—Irrigation—2M-432-3961

Licence Number 8203

4502


ORIGINAL

British Columbia.

To accompany *Final* Licence No. *8293*

LILLOOET WATER DISTRICT.

Scale, 6 Chains to 1 Inch.

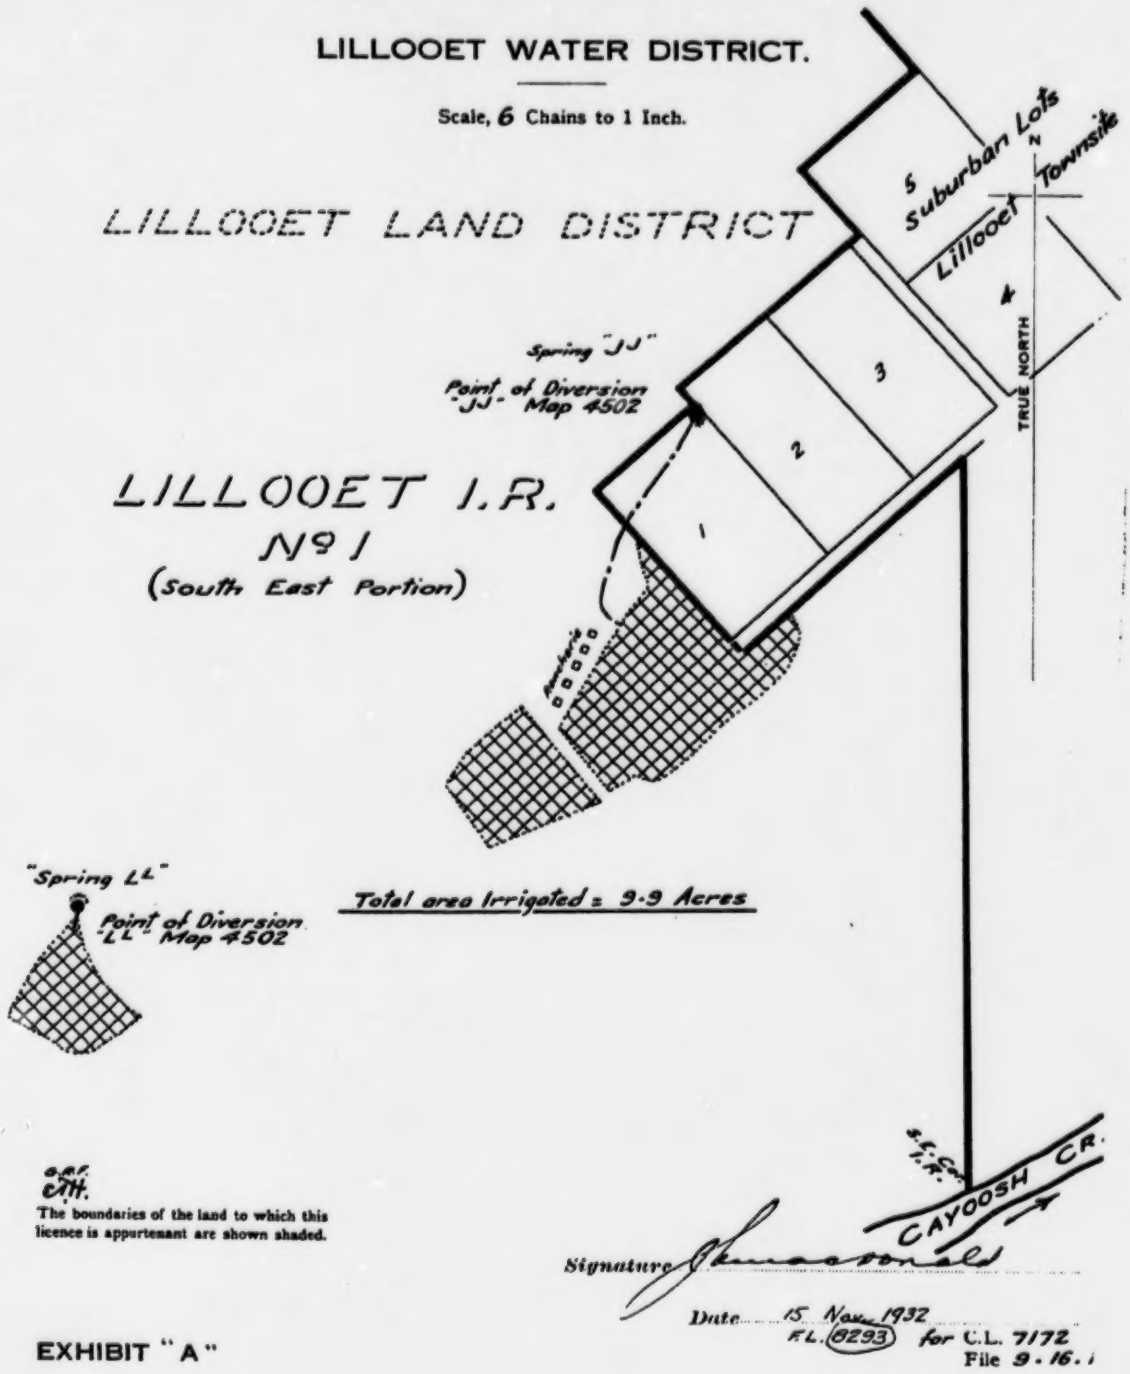

o.c.r. C.M.H.

The boundaries of the land to which this licence is appurtenant are shown shaded.

Signature *J. Macdonald*

Date *15 Nov. 1932*

F.L. (8293) for C.L. 7172

File 9.16.1

EXHIBIT "A"

ORDER

WATER ACT

Section 15

FILE NO. 0241105

In the matter of Final Water Licence No. 9626, which authorizes the diversion of 72.3 acre-feet per annum of water from Tyee Jimmie Creek, for irrigation purpose; of this quantity 1,000 gallons a day may be used for domestic purpose.

Being satisfied that no person's rights will be injuriously affected, I hereby amend clauses (b) and (h) of the said licence to read as follows:

(b) The point of diversion is located as shown on the attached amended plan.

(h) The works for the diversion and the carriage of the water consist of ditches and pipe, located as shown on the attached amended plan.

Dated at Victoria, B. C. this 3rd day of June, 1963.

A. F. Paget,
Comptroller of Water Rights.

British Columbia.

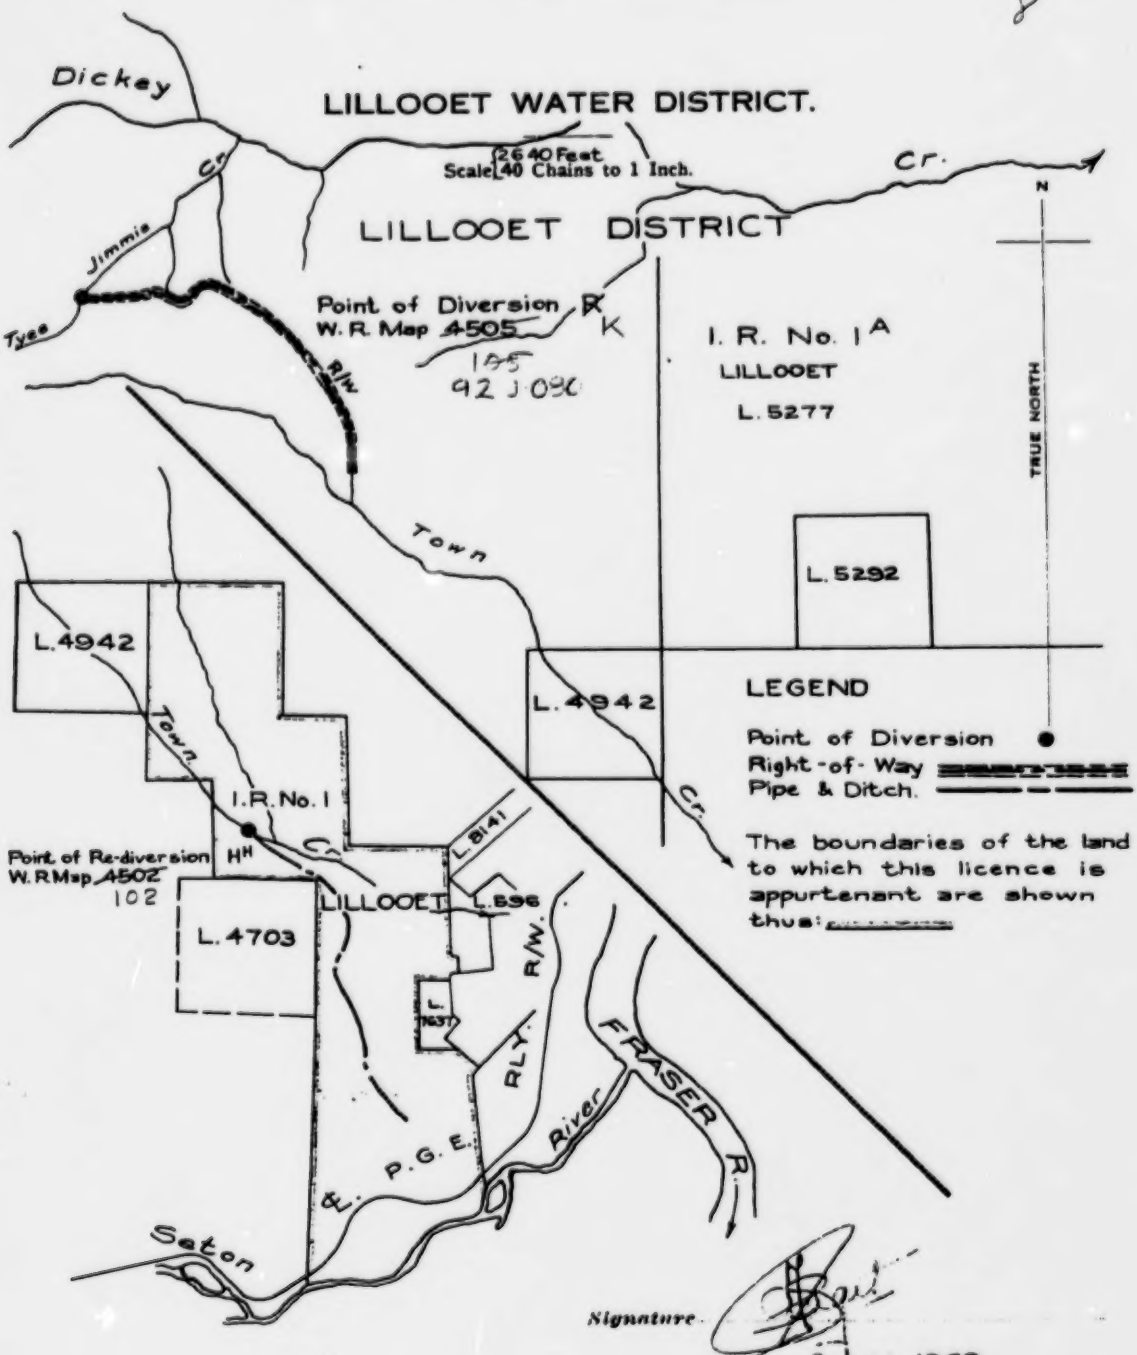


EXHIBIT "A"

For R/W see Ref. Map 92 1/NW (c-1)

PROVINCE OF BRITISH COLUMBIA. | WATER RIGHTS BRANCH. | DEPARTMENT OF LANDS.

FINAL WATER LICENCE.

The Superintendent-General of Indian Affairs of Ottawa, Canada, is hereby authorized to divert and use water as follows:—

(a.) The source of the water-supply is Tyee Jimmie creek,

a tributary of Dickie creek.

(b.) The point of diversion from the stream is located as shown in the Exhibit marked "A" hereto attached.

(c.) The date from which this licence shall have precedence is 13th May, 1903.

(d.) The purpose for which the water is to be used is Irrigation and Domestic.

(e.) The maximum quantity of water which may be diverted from the stream is 72.3 acre-feet per annum, of which quantity 1,000 gallons a day may be used for domestic purpose.

(f.) The period of the year during which the water may be used is for irrigation is 1st April to 30th September, and for domestic use the whole year.

(g.) The land upon which the water may be used is 24.1 acres of Lillooet Indian Reserve No.1, Lillooet Land District,

as shown in the said Exhibit "A."

(h.) The works for the diversion and the carriage of the water consist of ditches and pipe.

(i.) This licence is issued in substitution of Conditional Water Licence No. 7371.

Issued this 20th day of March, 1916.

Comptroller of Water Rights.

4502

File No. 12-16-1.

SUPERCEDED BY LICENCE NO. C65664/5

Licence No. 9626

W.R.B. 2—1M-424-7924

8


British Columbia.

To accompany Final Licence No. 9626

LILLOOET WATER DISTRICT.

Scale, 80 Chains to 1 Inch.

LILLOOET LAND DIST.

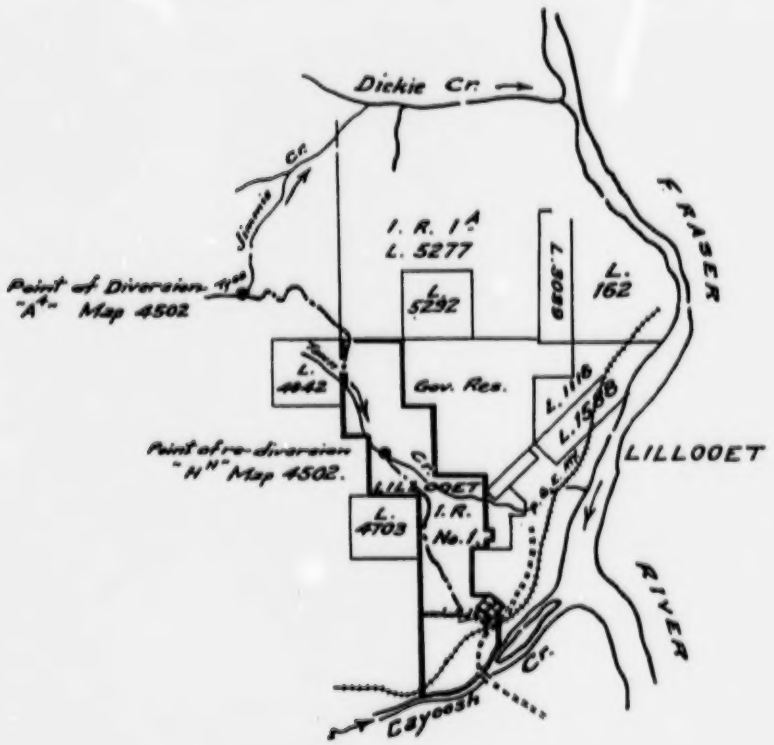

The boundaries of the land to which this licence is appurtenant are shown shaded. 20.1 acres within the said boundaries are irrigated.

EXHIBIT "A"

Signature [signature]

Dat. 20th March 1936.

F.L. 9626 for C.L. 7371

File 12-16-1

0241105

DEPARTMENT OF LANDS, FORESTS, AND WATER RESOURCES

Permit under the "Water Act" Authorizing the Occupation of Crown Land

Director of Indian Affairs, of Ottawa, Ontario,

the holder of a water licence authorizing the diversion of water from Tyee Jimmie Creek

is hereby authorized to occupy by maintaining and operating thereon the works authorised under Final Water Licence No. 9626,

the following Crown land, namely:— a portion of unsurveyed vacant Crown land within Lillooet District, being 7,300 feet ± in length and 15 feet in width, the location of which is shown approximately on the attached amended plan of the said water licence,

having an area of 2.5 ± acres.

And, subject to the payment of royalty, stumpage, and other compensation as provided under Condition 5,

is authorized to cut and remove from the said land any timber, the removal of which is necessary to permit the construction of the said works.

There is payable in respect of this permit an annual rental of $3.00, which is subject to alteration at any time. Failure to pay the annual rental will render this permit subject to cancellation.

This permit is appurtenant to the land to which the aforesaid water licence is appurtenant.

The conditions relative to the rights granted under this permit are printed on the back of this form.

Issued the 3rd day of June, 19 63.

Deputy Minister of Lands.

File 0241105

W.R. Map 4502 and 4505

Ref. Map 92 I/NW (C-1)

W.R.B. 13-6

~~Conditional~~ Final Licence No. 9626

PERMIT OVER CROWN LAND No. 5212

Province of British Columbia

WATER LICENCE APPLICATION

PLEASE REFER TO GUIDE NOTES. TO BE ACCEPTED, THIS APPLICATION MUST BE COMPLETED FULLY AND ACCOMPANIED BY A $ APPLICATION FEE.

PLEASE PRINT FIRMLY (Do Not Erase) FILE NO: 3002519

1 Name / Mailing Address

AINSWORTH LUMBER CO. LTD.
533 NICOLA STREET
Apt. # | Street # | Street | Post Office Box #
City: KAMLOOPS. Province: BRITISH COLUMBIA Postal Code: V2C 2P9.

Property Address If Different

AINSWORTH LUMBER CO. LTD LILLOOET DIV.
Home Tel: | Business Tel: 256 4266 | Message Tel:

2 Source

WELL BESIDE CAYOOSH CREEK (FRASER RIVER) Discharges into:

3 Purpose and Quantity

Domestic _____ gallons a day. Irrigation _____ number of ac
Storage _____ acre feet a year. Other (Specify) FIRE PROTECTION FIRE PREVENTION

4 Place of Use

Legal description of property where water is to be used: AINSWORTH MILL AND LOG YARD ON LEASES FROM LILLOOET INDIAN RESERVE FILE 987/32-45-4 (PARCEL E, LOT 47, LOT 6, LOT 2330, LOT 46)

Tenure to Land

Registered Owner ☐ Lessee ☒ Other

5 Works

THE PROPOSED WORKS WILL CONSIST OF:

Pipe ☒ Irrigation System ☒ Trough ☐ Tank ☒

Storage Works: Height of Dam TO SUPPLEMENT 600,000 US GAL Construction Material _____

Maximum Area of Reservoir _____ ac. FIRE STORAGE Quantity of Water Stored _____ ac ft.

Other Works: Joint Works ☐ Other users:

6 Point of Diversion/ Storage Site

Location:
WELL SITUATED BY CAYOOSH CR.

7 Lands Affected

The works will physically affect (by crossing or flooding) the following lands:
Legal Description of Land Affected | Name of Owner (including Crown)

~~Title~~ N/A.

92I/12e
WR 102C
2 106882
C#046216

MINISTRY OF ENVIRONMENT
RECEIVED
JUN 30 1993
KAMLOOPS, B.C.

8 Any Additional Relevant Information

1. SYSTEM IS TO MAINTAIN ADEQUATE WATER FOR FIRE PUMP.
2. SYSTEM IS TO LOAT DOWN LOGS TO PREVENT CATCHING FIR

NOTE: A sketch must accompany your application. See guide notes, item 9, for sketch requirements.

W W Ramdoom — Feb. 4/92
Applicant's Signature / Agent's Signature / Date

FOR OFFICIAL USE ONLY:


This is to certify that the sum of Three Hundred dollars ($ 300.00) is received from the undersigned for payment of application for water licence.

AINSWORTH LUMBER — June 30 1993
Applicant (please print) / Date

RECEIVED WATER MANAGEMENT BRANCH AUG 06 1993 — Received By

8548.37 J
Receipt Number

FILE:

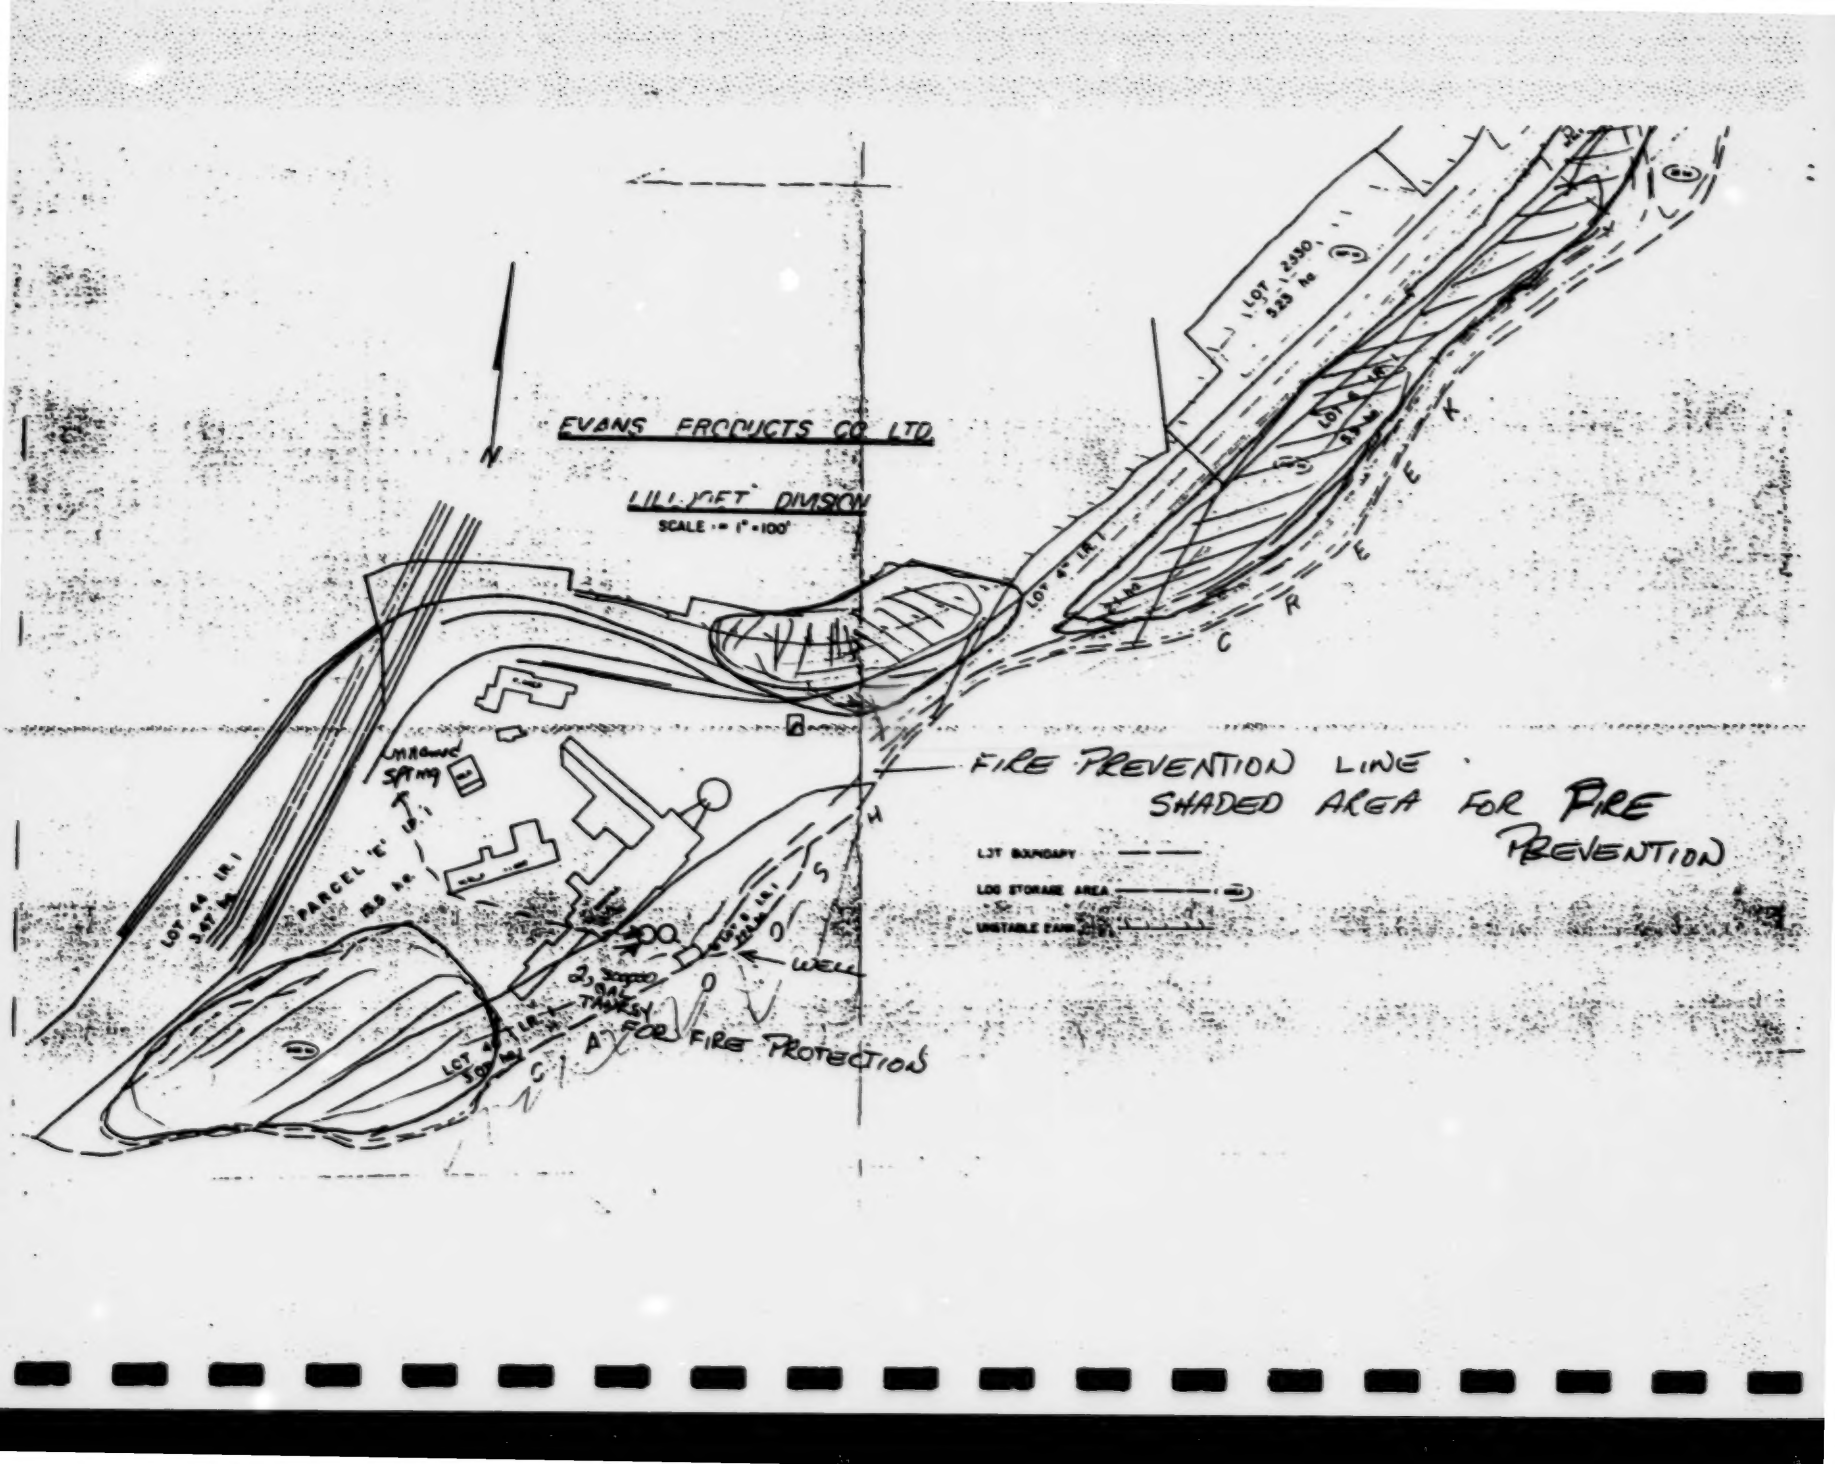
EVANS PRODUCTS CO LTD
LILLOOET DIVISION
SCALE 1" = 100'
N
FIRE PREVENTION LINE
SHADED AREA FOR FIRE PREVENTION
LOT BOUNDARY
LOG STORAGE AREA
UNSTABLE EARTH
WELL
FOR FIRE PROTECTION
PARCEL "C"
LOT 4 L.R.1
LOT 2350
523 Ha
A
B
C
D
E
F
G
H
J
K
L
M
R
S

Province of British Columbia
Ministry of Environment, Lands and Parks
Water Management

WATER LICENCE APPLICATION
Water Act, Section 8

PLEASE REFER TO GUIDELINES WHEN COMPLETING THIS APPLICATION

1 NAME & MAILING ADDRESS

SURNAME: Billy | GIVEN NAME(S): HERBERT

MAILING ADDRESS: Box 742 . Lillooet B.C.

POSTAL CODE: V0K 1V0

BUSINESS / MESSAGE PHONE#: 256 7815 | HOME PHONE#: — | FAX#: —

Do you hold another water Licence? Yes ☐ No ☒ | LICENCE / FILE NUMBERS (IF KNOWN):

FOR OFFICE USE ONLY

MINISTRY OF ENVIRONMENT
RECEIVED
PROCESSING
053582 MAR 08 1996
KAMLOOPS, B.C.

FILE# 3003114 | WLIS# 2110916

2 PLACE OF USE – Legal description of property where water is to be used

Tsuuck Reserve #2

TENURE TO LAND: Registered Owner ☑ | LESSEE / OTHER:

CERTIFICATE OF TITLE / PARCEL IDENTIFICATION NUMBER (PID#)

Copy of Legal Plan attached? Yes ☒ No ☐

3 PURPOSE(S) & QUANTITY – Please refer to Schedule 1 – *Water Purpose & Application Fees*

Domestic Purpose

4 SOURCE OF WATER

Means Brook | DISCHARGES INTO: None

5 WORKS – Existing or proposed to divert and convey water to place of use.

a) DIVERSION WORKS

PROPOSED POINT OF DIVERSION LOCATION: 50 feet below head of the spring

Pump ☐ Gravity Feed ☒ | LENGTH OF PIPE: 1000 ft / m | DIAMETER OF PIPE: 2CC ft 2 inch / 3CC 1 cm ft

OTHER WORKS: None planned

b) STORAGE WORKS

PROPOSED RESERVOIR LOCATION: N/A

VOLUME OF WATER STORED: m³ | DAM HEIGHT: m | AREA OF RESERVOIR: ha

c) ADDITIONAL INFORMATION

Joint work with others? Yes ☐ No ☑ | IF YES, WITH WHOM?

Works constructed? Yes ☐ No ☑ Partially ☐

RECEIVED
MINISTRY OF ENVIRONMENT
DIVISION
MAY 02 1996
FILE:

6. LANDS AFFECTED – The works will directly affect (by crossing or flooding) the following lands.

LAND DESCRIPTION: L4709 | NAME OF OWNER (INCLUDING CROWN): Jane Duber


APPLICANT / AGENT'S SIGNATURE: Billy Herbert | DATE: March 4th / 96

Province of British Columbia
Ministry of Environment, Lands and Parks
Water Management

WATER LICENCE APPLICATION
Water Act, Section 8

WATER LICENCE APPLICATION DRAWING

SAMPLE DRAWING – Typical drawing for domestic and irrigation licence.

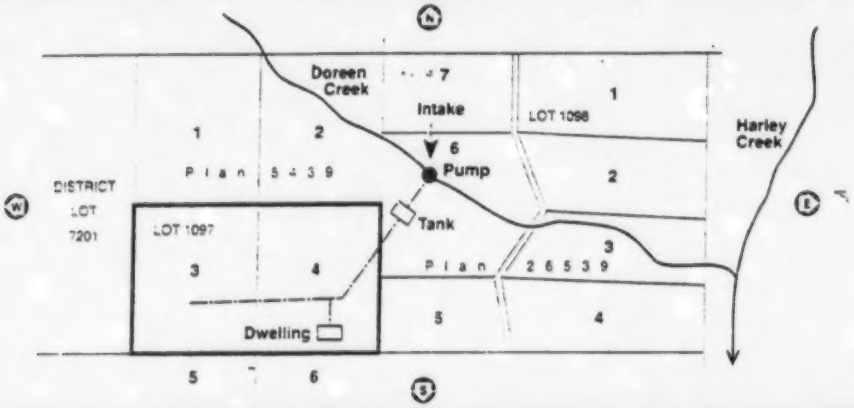

Scale: 1cm = 50m


Point of diversion ●

Pipeline ——·——·——

Boundary of property on which the water is to be used. ——————

APPLICANT'S DRAWING – Prepare a drawing to submit with your application. Refer to *Application Guidelines* for a list of required elements.

N

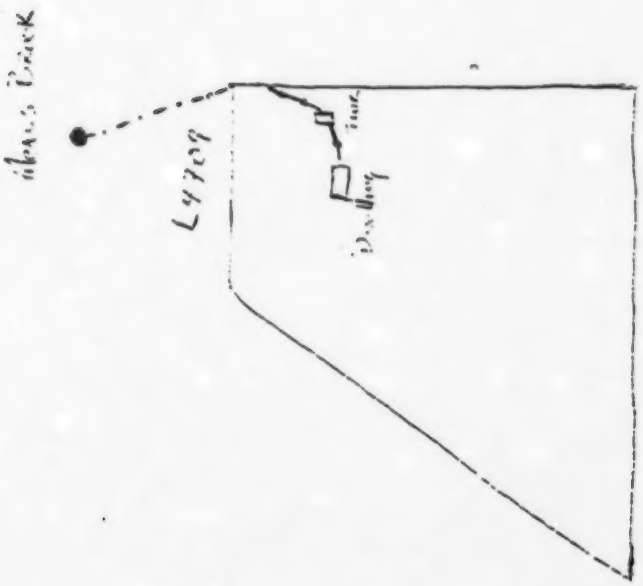

W E

Scale:

S

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:44
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FO47370 - 102 MM
END POINT : SO8011 - Brown Brook

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1891/02/23	F000162	0241101	71.2 AC OF MCCARTHEYS PLAT IR LILLOOET #4 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8141 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	1,000.00 GD 214.00 AF	Jan 01 Apr 01	Dec 31 Sep 30	INCIDENTAL DOMESTIC PURPOSE	
	Brown Brook McCartney Brook		WR102 WR102	WW N HH N					02D ASN - BRIDGE RIVER	
1973/08/27	C061763	0316655	15 AC OF L 1 OF L 1298 LILOOET DIST PLAN 15570	PEARER DAVID L PO BOX 852 HIGHWAY 12 LILLOOET BC V0K1V0	DOM IRR	500.00 GD 45.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Brown Brook		WR102	WW N					02D ASN - BRIDGE RIVER	

---------- Total of 2 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:42
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PD47367 - 102 D5
END POINT : SO4008 - Dew Brook

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source			WR Map	POD	RED POD Comments				Prec	
1963/02/20	C030254	0248443	8 AC OF IR 64 MCCARTHEYS FLAT LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8141 PO BOX 615 LILLOOET BC V0K1V0		IRR	24.00 AF	Apr 01	Sep 30	
Dew Brook			WR102	DS	N				02D ASH - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/06/14 10:50
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : F047189 - 105 V
END POINT : 808081 - Dickey Creek right of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Proc	
1891/05/20	P004752	0242357	129 AC OF L 162 LILLOOET DIST	SQUAMISH LILLOOET REGIONAL DIST BOX 219 PEMBERTON BC V0N2L0	WMELA	211,700,000.00 GY	Jan 01	Dec 31		
	Dickey Creek		WR105	Y N					02D ASH - BRIDGE RIVER	
1948/08/20	C048890	0175188	3 AC OF L 3100 LILLOOET DIST EXC PLAN 27283	CHANDLER TREVOR & SARAH E BOX 1389 LILLOOET BC V0K1V0	IRR	9.00 AF	Apr 01	Sep 30		
	Dickey Creek		WR105	HH N					02D ASH - BRIDGE RIVER	
1948/08/20	C048891	0346096	1 AC OF L 2 OF L 3100 LILLOOET DIST PLAN 27283	MEREDITH ROBERT A BOX 287 LILLOOET B C V0K1V0	IRR	3.00 AF	Apr 01	Sep 30		
	Dickey Creek		WR105	GG N					02D ASH - BRIDGE RIVER	
1950/07/29	C026551	0221396	ALL THE LANDS WITHIN THE BOYS OF	LILLOOET VILLAGE OF BOX 618 LILLOOET BC V0K1V0	WMELA	73,000,000.00 GY	Jan 01	Dec 31		
	Dickey Creek		WR105	V N					02D ASH - BRIDGE RIVER	
1958/09/17	P018375	0222194	L 1 OF L 3100 LILLOOET DIST PLAN 27283	CHANDLER TREVOR & SARAH E BOX 1389 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Dickey Creek		WR105	JJ N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	POC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WE Map	POD RED POD Comments					Proc	
1959/03/17	C045418	0224594	L 162, 1303 & 3099 PLAN 32740 L 1116 EXC PLAN A733, 83612 7041, 8111 & 10753 & EXC THAT PART E OF RLY ALL LILLOOET DIST	DOM SW IRR	500.00 GD 500.00 GD 207.79 AF	Jan 01 Jan 01 Apr 01	Dec 31 Dec 31 Sep 30	STOCK WATERING	A/A APPORTIONMENT PEND
Dickey Creek		WR105	BB M					02D ASH - BRIDGE RIVER	
1959/03/17	C046989	3000546	L 1 OF L 162, 1303 & 3099 PLAN 32740 LILLOOET DIST	DOM GARBG	500.00 GD 4,500.00 GD	Jan 01 Jan 01	Dec 31 Dec 31	GARBAGE DUMP	
Dickey Creek		WR105	BB M					02D ASH - BRIDGE RIVER	
1959/04/03	P018377	0224706	L 2 OF L 3100 LILLOOET DIST PLAN 27283	DOM	1,000.00 GD	Jan 01	Dec 31		
Dickey Creek		WR105	JJ M					02D ASH - BRIDGE RIVER	
1961/11/23	P018412	0239570	THAT PART L 162 LILLOOET DIST LYING E OF THE RD R/W & EXC PLAN 10764 & 13662	DOM	1,000.00 GD	Jan 01	Dec 31		
Dickey Creek		WR105	Y M					02D ASH - BRIDGE RIVER	
1962/01/08	P018413	0240182	L 5 OF L 1303 LILLOOET DIST PLAN 13662	DOM	500.00 GD	Jan 01	Dec 31		
Dickey Creek		WR105	Y M					02D ASH - BRIDGE RIVER	

Licensee: PENK DAVID; GAMBON NORMA LYNN; PO BOX 1344; LILLOOET BC; V0K1V0

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1962/01/15	P018415	0242505	L 3 OF L 1303 LILLOOET DIST PLAN 13662	SMUCINS VITALIS & SHEILA PO BOX 751 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Dickey Creek		WR105	Y N					02D ASH - BRIDGE RIVER	
1965/06/16	C050352	0263034	2 AC OF L 3100 LILLOOET DIST EXC PLAN 27281	CHANDLER TREVOR & SARAH E BOX 1389 LILLOOET BC V0K1V0	DOM IRR	500.00 GD 6.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Dickey Creek Dickey Creek		WR105 WR105	Y N EE N					02D ASH - BRIDGE RIVER	
1965/12/20	C048889	0266774	ALL THE LAND WITHIN THE BDYS OF	SQUAMISH LILLOOET REGIONAL DIST BOX 219 PEMBERTON BC V0N2L0	WMELA	211,700,000.00 GY	Jan 01	Dec 31		
	Dickey Creek		WR105	Y N					02D ASH - BRIDGE RIVER	
1966/05/26	C061087	0268372	SEE LICENCE	HJERPE HOLDINGS LIMITED BOX 501 LILLOOET B C V0K1V0	DOM IRR	1,000.00 GD 180.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Dickey Creek		WR105	CC N					02D ASH - BRIDGE RIVER	
1974/02/18	C048577	0322622	THAT PART OF NLY 20 CHAINS L 1303 LILLOOET DIST LYING E OF RD SHOWN ON PLAN 12950	JOHN IVAN J HANSON STUART L PO BOX 682 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Dickey Creek		WR105	DD N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source	NR Map	POD	REG POD Comments					Proc	
1990/02/12	I102680	3001601 L 2 L 3180	LILLOOET DIST PL 27263	DOM	500.00 GD	Jan 01	Dec 31		APP APPLIC-CLEARED
			MEREDITH ROBERT A BOX 287 LILLOOET B C V0K1V0						
	Dickey Creek	WR105	MN N					02D ASH - BRIDGE RIVER	

---------- Total of 16 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:36
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : F047440 - 1018 L3
END POINT : S07938 - Kilchult Creek right of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WS Map	POD RED POD Comments					Prec	
1920/06/25	P004160	0022720	11.3 AC OF LILLOOET IR 03 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8140 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	1,000.00 GD 36.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Kilchult Creek		WR101B	X N					02D ASH - BRIDGE RIVER	
	Kilchult Creek		WR101B	JJ N						
	Kilchult Creek		WR101B	KK N						
1963/06/14	C029043	0250343	N 1/2 OF L 1586 LILLOOET DIST	LEDOUX ROLAND BOX 1715 LILLOOET B C V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Kilchult Creek		WR101B	LJ N					02D ASH - BRIDGE RIVER	

---------- Total of 2 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:42
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD47366 - 102 MM
END POINT : EOE007 - McCartney Brook left of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD	RED POD Comments					Prec	
1891/02/23	F008162	0241101	71.2 AC OF MCCARTNEYS FLAT IR LILLOOET #4 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8141 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	1,000.00 GD 214.00 AF	Jan 01 Apr 01	Dec 31 Sep 30	INCIDENTAL DOMESTIC PURPOSE	
McCartney Brook		WR102	MM H						02D ASH - BRIDGE RIVER	
Brown Brook		WR102	MM H							

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/06/13 11:06
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD47431 - 1018 B4
END POINT : SD7976 - Keane Brook

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	POC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1963/05/10	C105696	0269740	8 AC OF DL 4709 LILLOOET DISTRICT EX PLANS 30251 & 37236	DUBBE JANE BOX 1185 LILLOOET BC V0K1V0	DOM IRR	500.00 GD 24.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Keane Brook		WR101B	84	N				02D ASH - BRIDGE RIVER	
1963/05/10	F015448	0269962	15 AC OF L 291 LILLOOET DIST	KARSGARD DAVID BOX 63 LILLOOET BC V0K1V0	IRR	15.00 AF	Apr 01	Sep 30		A/A APPORTIONMENT PEND
	Keane Brook		WR101B	84	N				02D ASH - BRIDGE RIVER	
1970/05/26	C039963	0296473	L 291 LILLOOET DIST	KARSGARD DAVID BOX 63 LILLOOET BC V0K1V0	DOM	1,000.00 GD	Jan 01	Dec 31		A/A APPORTIONMENT PEND
	Keane Brook		WR101B	84	N				02D ASH - BRIDGE RIVER	
1996/03/08	I110916	3003114	TOMINOCK IR NO. 2 DL 4709 LD	BILLY HERBERT BOX 742 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		APP APPLIC-CLEARED
	Keane Brook		WR101B	24	N				02D ASH - BRIDGE RIVER	

---------- Total of 4 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:38
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PD47333 - 102A JJ
END POINT : SO8036 - Rancherie Spring

Stream Register Report

Water Licence Information System

DATE: 1996/05/30
TIME: 11:30
PAGE: 001

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1891/02/23	F008293	0261104	9.9 AC OF SE PORTION #1 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0		DOM IRR	2,000.00 GD 10.00 AF	Jan 01 Apr 01	Dec 31 Sep 30	
	Rancherie Spring		WR102A	JJ	N					
	Tribal Spring		WR102A	LL	N				02D A&N - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:39
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PO47337 - 102A R4
END POINT : SO8045 - Reservation Spring No. 1

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Freq	
1954/01/06	C021994	0202519	1.5 AC OF IR #1 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	IRR	4.50 AF	Apr 01	Sep 30		
	Reservation Spring No. 1		WR102A	84 M					02D ASH - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:40
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD67339 - 102A 86
END POINT : SC8046 - Reservation Spring No. 2

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source	WR Map	POD	RED POD Comments				Proc	
1954/01/06	C021995	0202520 3.2 AC OF IR 01 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	IRR	9.60 AF	Apr 01	Sep 30		
	Reservation Spring No. 2	WR102A	S4	N				02D ASH - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:41
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : SO47335 - 102A T6
END POINT : SO8047 - Reservation Spring No. 3

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1954/01/06	C021993	0202521	4.5 AC OF IND RESERVE 81 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0		IRR	13.50 AF	Apr 01	Sep 30	
	Reservation Spring No. 3		WR102A	T6	N				02D ASH - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:37
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PD47390 - 101B R
END POINT : 807935 - Riley Creek right of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source			WR Map	POD RED POD Comments					Proc	
1865/10/26	F004851	0242341	107 AC OF L 6 LILLOOET DIST	CWYN MAUR RANCH LTD PO BOX 217 LILLOOET BC V0K1V0	IRR	321.00 AF	Apr 01	Sep 30		
Riley Creek			WR101B	F M					02D ASH - BRIDGE RIVER	
1885/12/22	C040936	0245740	5.66 AC OF L 2 OF L 327 LILLOOET DIST PLAN 22392	TERRY SAUL J DRAKE ELIZABETH J BOX 765 LILLOOET BC V0K1V0	IRR	17.00 AF	Apr 01	Sep 30		
Riley Creek			WR101B	E M					02D ASH - BRIDGE RIVER	
1885/12/22	C040938	0310520	5.93 AC OF L 1 OF L 327 LILLOOET DIST PLAN 22392	TUEMP ERDMANN H PO BOX 1372 LILLOOET BC V0K1V0	IRR	17.80 AF	Apr 01	Sep 30		
Riley Creek			WR101B	BB M					02D ASH - BRIDGE RIVER	
1885/12/22	C040942	0310522	7.5 AC OF L 1 OF L 327 LILLOOET DIST PLAN 23166	VANDERWOLF GEORGE & KAREN BOX 1358 LILLOOET B C V0K1V0	IRR	22.50 AF	Apr 01	Sep 30		
Riley Creek			WR101B	E M					02D ASH - BRIDGE RIVER	
1885/12/22	C040944	0310523	5.47 AC OF L 2 OF L 327 LILLOOET DIST PLAN 23166	MCNARY LLOYD M & MARIA GD LILLOOET BC V0K1V0	IRR	16.40 AF	Apr 01	Sep 30		
Riley Creek			WR101B	E M					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD RED POD Comments					Prec	
1995/12/22	C053560	0346687	1.47 AC OF L 1 OF L 1585 LILLOOET DIST PLAN 24082	IRR	4.40 AF	Apr 01	Sep 30		
			ROSS CLAYTON N & LORRAINE K BOX 583 LILLOOET BC V0K1V0						
Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1995/12/22	C053561	0310524	.5 AC L 3 OF L 327 LILLOOET DIST PLAN 23166	IRR	1.50 AF	Apr 01	Sep 30		AMD UNDER AMENDMENT
			ROSS CLAYTON N & LORRAINE K BOX 583 LILLOOET BC V0K1V0						
Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1995/12/22	C100575	0310521	1.86 AC OF LOT A OF DL 327 LILLOOET DISTRICT PLAN 36155	IRR	5.57 AF	Apr 01	Sep 30		
			ALSHDAL CONTRACTING LTD BOX 575 LILLOOET BC V0K1V0						
Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1995/12/22	C100576	3002772	3.71 ACS OF LOT B OF DL 327 LILLOOET DISTRICT PLAN 36155	IRR	11.13 AF	Apr 01	Sep 30		
			SILLS NIKKI D BOX 1816 LILLOOET BC V0K1V0						
Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1995/12/22	F013716	0242342	1.8 AC OF L 327 LILLOOET DIST PLAN B1459	IRR	5.40 AF	Apr 01	Sep 30		
			COOK WILLIAM A BOX 398 LILLOOET BC V0K1V0						
Riley Creek		WR101B	E4 N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD	RED POD Comments				Prec	
1898/02/02	C036237	0290888	6 4 AC OF L 1 OF L 662 LILLOOET DIST PLAN 10295	COOK WILLIAM A BOX 398 LILLOOET BC V0K1V0	IRR	16.00 AF	Apr 01	Sep 30	
Riley Creek		WR101B	K4	N				02D ASH - BRIDGE RIVER	
1898/02/03	C050191	0290889	1.5 AC OF L 2 OF L 662 LILLOOET DIST PLAN 10295	ELLIOT BETTY S BOX 1141 LILLOOET BC V0K1V0	IRR	3.75 AF	Apr 01	Sep 30	A/A APPORTIONMENT PEND
Riley Creek		WR101B	G	N				02D ASH - BRIDGE RIVER	
1898/02/02	C067167	0242343	1.5 AC OF L 1 OF L 662 & 3337 LILLOOET DIST PLAN 34956	READ BRADLEY SEED ROBERTA PO BOX 1264 LILLOOET BC V0K1V0	IRR	3.75 AF	Apr 01	Sep 30	
Riley Creek		WR101B	G	N				02D ASH - BRIDGE RIVER	
1914/07/31	C040736	0265446	1.3 AC OF L 1584 LILLOOET DIST	TUEMP ERDMANN H PO BOX 1372 LILLOOET BC V0K1V0	IRR	4.00 AF	Apr 01	Sep 30	
Riley Creek		WR101B	BB	N				02D ASH - BRIDGE RIVER	
1917/05/30	C109837	0265776	0.34 AC OF LOT 3 DL 1586 LD PLAN 1774 5	LEDOUX ROLAND BOX 1715 LILLOOET B C V0K1V0	IRR	0.85 AF	Apr 01	Sep 30	
Riley Creek		WR101B	R	N				02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Proc	
1917/05/30	C109838	3002929	0.34 AC OF LOT 1 DL 1586 LD PL 17765	GUNART JOHN & CATHERINE L 1931 EASTLEIGH LANE NORTH VANCOUVER BC V7G1W1	IRR	0.85 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	
1917/05/30	C109839	3002930	0.32 AC LOT 2 DL 1586 LD PL 17765	FORSYTH GEORGE J BOX 483 LILLOOET BC V0K1V0	IRR	0.80 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	
1917/05/30	F014618	0265776	10 AC OF S 1/2 OF L 1586 LILLOOET DIST	FORSYTH GEORGE J BOX 483 LILLOOET BC V0K1V0	IRR	25.00 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	
1918/05/17	P005694	0005094	5.5 AC OF L 449 LILLOOET DIST	DEROY ROBERT J BOX 344 LILLOOET BC V0K1V0	IRR	16.50 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	F N					02D ASH - BRIDGE RIVER	
1918/08/26	C109976	0006692	1.8 ACS OF DL 4903 LILLOOET DISTRICT EXC PLAN EAP47250	MURAY JAMES A BOX 197 LILLOOET BC V0K1V0	IRR	5.67 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD	BED POD Comments					Prec	
1918/08/24	C109977	3002969	0.9 AC OF LOT 1 DL 4903 LILLOOET DIST RICT PLAN KAP47250	CACCIA-BIRCH ANTHONY M & THERESE M BOX 1254 LILLOOET BC V0K1V0	IRR	2.83 AF	Apr 01	Sep 30		
Riley Creek		WR101B	R	N					02D ASH - BRIDGE RIVER	
1919/04/25	C067145	0010359	4.6 AC OF THAT PART OF L 5 OF L 662 & 3337 LILLOOET DIST PLAN 34957 LOCATED NE OF TEXAS CR RD	SMITH GREGORY P & LORI M PO BOX 633 LILLOOET BC V0K1V0	IRR	14.00 AF	Apr 01	Sep 30		
Riley Creek		WR101B	G	N					02D ASH - BRIDGE RIVER	
1925/06/19	F008115	0061722	7.5 AC OF LILLOOET IR #1B LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8130 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	1,000.00 GD 22.50 AF	Jan 01 Apr 01	Dec 31 Sep 30		
Riley Creek		WR101B	BB	N					02D ASH - BRIDGE RIVER	
1937/06/18	F011570	0128205	15 AC OF L 291 LILLOOET DIST	KARSGARD DAVID BOX 63 LILLOOET BC V0K1V0	IRR	30.00 AF	Apr 01	Sep 30		A/A APPORTIONMENT PEND
Riley Creek		WR101B	G	N REDIVERSION AT CC 101B BETWEEN CR					02D ASH - BRIDGE RIVER	
Between Brook		WR101B	CC	Y REDIVERSION FROM G 101B RILEY CR						
1937/12/31	C043741	0323554	1 AC OF L A OF L 3097 LILLOOET DIST PLAN 22393	COOK WILLIAM A BOX 398 LILLOOET BC V0K1V0	IRR	3.00 AF	Apr 01	Sep 30		
Riley Creek		WR101B	R	N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1937/12/31	C051934	0346369	3.0 AC OF L 1 OF L 3097 LILLOOET DIST PLAN 20350	SPENCER ZANE E SCALLON TERESA M BOX 1503 LILLOOET BC V0K1V0	IRR	11.40 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	V3 M					02D ASH - BRIDGE RIVER	
1937/12/31	F051936	0130082	2.7 AC OF L 3097 LILLOOET DIST EXC PLAN 22393 & 20350	BOWLING WILLIAM H & CHERYL J PO BOX 1730 LILLOOET BC V0K1V0	IRR	0.10 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	V3 M					02D ASH - BRIDGE RIVER	
1939/05/16	C110930	0135212	5.75 ACS OF DL 3333 & 3090 LILL DIST EXC PLAN 30280	HEMPELL STEPHEN W FREDERICK CYNTHIA L BOX 312 LILLOOET BC V0K1V0	IRR	17.25 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R M					02D ASH - BRIDGE RIVER	
1939/05/16	C110939	3003136	5.75 ACS OF DL 326 LILL DIST EXCEPT P LAN KAP54930	WRINCH JOEL L & HEATHER K BOX 704 LILLOOET BC V0K1V0	IRR	17.25 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	R M					02D ASH - BRIDGE RIVER	
1940/05/07	F012184	0139662	6.3 AC OF L 7321 LILLOOET DIST	WRIGHT ELLA M ESTATE OF C/O NEAL HENRY WRIGHT TEXAS CREEK RD LILLOOET BC V0K1V0	IRR	19.00 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	TT M					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED	POD Comments			Prec	
1941/09/08	C105695	0193077	1.2 AC OF LOT 1 OF DL 4709 LILLOOET DISTRICT PLAN 37236	VIDAL EDWARD J & BETTY-ANN BOX 1159 LILLOOET BC V0K1V0	IRR	3.60 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	G	N				02D ASH - BRIDGE RIVER	
1947/03/04	F021106	0166200	L 1 OF L 662 LILLOOET DIST PLAN 18295	COOK WILLIAM A BOX 390 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Riley Creek		WR101B	K4	N				02D ASH - BRIDGE RIVER	
1948/06/21	F014531	0169139	L 291 LILLOOET DIST	KARSGARD DAVID BOX 63 LILLOOET BC V0K1V0	DOM	1,000.00 GD	Jan 01	Dec 31		A/A APPORTIONMENT PEND
	Riley Creek		WR101B	G	N	REDIVERSION AT ZZ 101B BETWEEN CR			02D ASH - BRIDGE RIVER	
	Between Brook		WR101B	ZZ	Y	REDIVERSION FROM G 101B RILEY CR				
1948/06/21	F014532	0169139	.5 AC OF L A & B OF L 3337 & 4709 & 291 LILLOOET DIST PLAN 2462	KARSGARD DAVID BOX 63 LILLOOET BC V0K1V0	IRR	1.50 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	G	N	REDIVERSION AT ZZ 101B BETWEEN CR			02D ASH - BRIDGE RIVER	
	Between Brook		WR101B	ZZ	Y	REDIVERSION FROM G 101B RILEY CR				
1949/01/02	C019267	0177251	10 AC OF L 326 & 3090 LILLOOET DIST	HEMPELL STEPHEN W FREDERICK CYNTHIA L BOX 312 LILLOOET BC V0K1V0	IRR	30.00 AF	Jun 01	Aug 15		A/A APPORTIONMENT PEND
	Riley Creek		WR101B	F	N				02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1959/06/11	P020589	0225922	L 3097 LILLOOET DIST EXC PLAN 22393 & 28390	BOWLING WILLIAM H & CHERYL J PO BOX 1730 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Riley Creek		WR101B	V3 N					02D ASH - BRIDGE RIVER	
1962/08/24	C040937	0245740	6.15 AC OF L 2 OF L 327 LILLOOET DIST PLAN 22392	TERRY SAUL J DRAKE ELIZABETH J BOX 745 LILLOOET BC V0K1V0	IRR	8.30 AF	Jun 01	Aug 15		
	Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1962/08/24	C040939	0310520	4.35 AC OF L 1 OF L 327 LILLOOET DIST PLAN 22392	TUEMP ERDMANN H PO BOX 1372 LILLOOET BC V0K1V0	IRR	8.70 AF	Jun 01	Aug 15		
	Riley Creek		WR101B	RB N					02D ASH - BRIDGE RIVER	
1962/08/24	C040943	0310522	5.5 AC OF L 1 OF L 327 LILLOOET DIST PLAN 23166	VANDERWOLF GEORGE & KAREN BOX 1358 LILLOOET B C V0K1V0	IRR	11.00 AF	Jun 01	Aug 15		
	Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	
1962/08/24	C040945	0310523	4.05 AC OF L 2 OF L 327 LILLOOET DIST PLAN 23166	MCNARY LLOYD N & MARIA GD LILLOOET BC V0K1V0	IRR	8.10 AF	Jun 01	Aug 15		
	Riley Creek		WR101B	E N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		NR Map	POD RED POD Comments					Prec	
1962/08/24	C040967	0310524	1.45 AC OF L 3 OF L 327 LILLOOET DIST PLAN 23166	TAYLOR RONALD M & JANE H BOX 1142 LILLOOET B C V0K1V0	IRR	2.90 AF	Jun 01	Aug 15		AND UNDER AMENDMENT
	Riley Creek		NR101B	E N					02D ASH - BRIDGE RIVER	
1962/08/24	C108577	0310521	1.37 ACS OF LOT A OF DL 327 LILLOOET DISTRICT PLAN 36155	ALSMOAL CONTRACTING LTD BOX 575 LILLOOET BC V0K1V0	IRR	2.73 AF	Jun 01	Aug 15		
	Riley Creek		NR101B	E N					02D ASH - BRIDGE RIVER	
1962/08/24	C108578	3002772	2.73 ACS OF LOT B OF DISTRICT LOT 327 PLAN 36155	HILLS HIKKI D BOX 1816 LILLOOET BC V0K1V0	IRR	5.47 AF	Jun 01	Aug 15		
	Riley Creek		NR101B	E N					02D ASH - BRIDGE RIVER	
1966/09/01	P042943	0270469	THAT PART OF L 1 OF L 327 LILLOOET DIST PLAN 17292 LYING W OF RD SHOWN ON SAID PLAN & N OF PLAN A8051	ALLEN KENNETH & ELIZABETH BOX 1630 LILLOOET BC V0K1V0	DOM	1,000.00 GD	Jan 01	Dec 31		
	Riley Creek		NR101B	U1 N					02D ASH - BRIDGE RIVER	
1968/10/10	P063735	0281894	15.1 AC OF L 1 OF L 327 LILLOOET DIST PLAN 17292	ALLEN KENNETH & ELIZABETH BOX 1630 LILLOOET BC V0K1V0	IRR	45.30 AF	Apr 01	Sep 30		
	Riley Creek		NR101B	U1 N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1970/02/27	C036810	0296073	L 2 OF L 662 LILLOOET DIST PLAN 18295	ELLIOT BETTY S BOX 1161 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Riley Creek		WR101B	X3 N					02D ASH - BRIDGE RIVER	
1970/10/07	C067166	0300307	6 AC OF THAT PART OF L B OF L 662 & 3337 LILLOOET DIST PLAN 34957 LOCATED NE OF TEXAS CR RD	SMITH GREGORY P & LORI M PO BOX 433 LILLOOET BC V0K1V0	IRR	10.00 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	G N					02D ASH - BRIDGE RIVER	
1972/11/30	C043841	0316179	15 AC OF L A OF L 327 LILLOOET DIST PLAN B1659 & L 1 OF L 662 PLAN 18295	COOK WILLIAM A BOX 398 LILLOOET BC V0K1V0	IRR	45.00 AF	Apr 01	Sep 30		
	Riley Creek		WR101B	E4 N					02D ASH - BRIDGE RIVER	
1977/09/12	C051993	0342049	3.5 AC L 3 OF L 1505 LILLOOET DIST PLAN 24082	TUEMP GUNDELINDE G & BARBARA BOX 462 LILLOOET BC V0K1V0	IRR	10.50 AF	Apr 01	Sep 30		AMD UNDER ASSESSMENT
	Riley Creek		WR101B	Q4 N					02D ASH - BRIDGE RIVER	
1970/02/06	C053563	0345143	L 1 OF L 3087 LILLOOET DIST PLAN 28390	SPENCER ZANE E SCALLON TERESA M BOX 1583 LILLOOET BC V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Riley Creek		WR101B	V3 N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1979/02/09	C053708	0365163	THAT PART OF L 1 OF L 3327 LILLOOET DIST PLAN 23166 LYING N OF THE RD AS SHOWN ON SAID PLAN	VANDERWOLF GEORGE & KAREN BOX 1350 LILLOOET B C V0K1V0	DOM	500.00 GD	Jan 01	Dec 31		
	Riley Creek		WR101B	R4 N					02D ASH - BRIDGE RIVER	
1984/05/24	C066865	3000623	5 AC OF L 1 OF L 1505 LILLOOET DIST PLAN 24695	BODALY WILLIAM S & JUDY M PO BOX 522 LILLOOET B C V0K1V0	IRR	15.00 AF	Apr 01	Sep 30		AMD UNDER AMENDMENT
	Riley Creek		WR101B	Q4 N					02D ASH - BRIDGE RIVER	
1991/06/10	C102970	3001964	4 ACS OF THAT PART OF SOUTH 1/2 OF DL 1506 LILLOOET DISTRICT LYING WEST AND SOUTH OF TEXAS CR RD	FORSYTH GEORGE J BOX 483 LILLOOET BC V0K1V0	IRR	10.00 AF	Jun 01	Sep 30		
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	
1992/02/20	2104277	3002126	DL 4903 LD	VERNON LOUISE K BOX 583 LILLOOET BC V0K1V0	IRR	12.50 AF	Apr 01	Sep 30		APP APPLIC-CLEARED
	Riley Creek		WR101B	R N					02D ASH - BRIDGE RIVER	

---------- Total of 54 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:45
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PO47305 - 102 85
END POINT : SO80095 - Seton Lake on Seton River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	NED POD Comments				Prec	
1989/02/17	C065098	J001434	IR 05 SETON LAKE LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8142 PO BOX 515 LILLOOET BC V0K1V0	WATER	6,580.00 CD	Jan 01	Dec 31		
	Seton Lake		WR102	05 N					02D ASH - BRIDGE RIVER	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/07 13:57
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD47373 - 102 T6
END POINT : 808030 - Seton River right of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source			WR Map	POD RED POD Comments					Prec	
1953/04/27	C021712	0199585	A POWER HOUSE SITE IN L 3 OF 1 LILLOOET DIST	BC HYDRO & POWER AUTHORITY PWR SUPPLY BUS. SERVICES 4911 SOUTHPOINT DR (BO6) BURNABY BC V3N4X8	PRGEN	2,606,384.00 AF	Jan 01	Dec 31	MINIMUM FLOW FOR PRESERVATION OF FISH	
Seton River			WR103	T6 N						
Cayoosh Creek			WR103	U6 N					02D ASH - BRIDGE RIVER	
1955/03/07	P018642	0207051	27.5 AC OF IR 81 CAYOOSH CR LILLOOET DIST	CAYOOSE CREEK INDIAN BAND 987-591-8117 PO BOX 484 LILLOOET BC V0K1V0	IRR	82.50 AF	Apr 01	Sep 30		
Seton River			WR102	T4 N					02D ASH - BRIDGE RIVER	
1957/12/13	P018067	0218671	33 AC OF THAT PART OF L 3 LILLOOET DIST SHOWN ON PLAN E9571	WATERS CHARLES K & NANCY H BOX 1689 LILLOOET BC V0K1V0	IRR	99.00 AF	Apr 01	Sep 30		A/A APPORTIONMENT PEND
Seton River			WR102	T4 N					02D ASH - BRIDGE RIVER	
1960/05/16	C026251	0230320	CHANNEL WITHIN L 145 LILLOOET DIST PLAN A62	FISHERIES & OCEANS CANADA 400 - 555 W HASTINGS ST VANCOUVER BC V6B5G3	CONAB	10.00 CS	Jan 01	Dec 31	ARTIFICIAL SPAWNING CHANNEL	
Seton River			WR102	T4 N					02D ASH - BRIDGE RIVER	
1962/06/14	P018643	0244470	IR 81 CAYOOSH CR LILLOOET DIST	CAYOOSE CREEK INDIAN BAND 987-591-8117 PO BOX 484 LILLOOET BC V0K1V0	WATOT	4,000.00 GD	Jan 01	Dec 31		
Seton River			WR102	T4 N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		MR Map	POD RED POD Comments					Proc	
1966/01/10	C031675	0267132 PARCEL A OF IR 81 CAYOOSH CR LILLOOET DIST AS SHOWN OUTLINED IN BLUE ON ATTACHED PLAN	FISHERIES & OCEANS CANADA 400 - 555 W HASTINGS ST VANCOUVER BC V6B5G3	CONUS	40.00 CS	Jan 01	Dec 31	ARTIFICIAL SPAWNING CHANNEL	
Seton River		MR102	T4 N					02D ASH - BRIDGE RIVER	
1970/08/13	C044728	0300020 ALL THE LANDS WITHIN THE BOYS OF	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0	MUNLA	730,000,000.00 CY	Jan 01	Dec 31		AND UNDER AMENDMENT
Seton River		MR102A	Q5 N					02D ASH - BRIDGE RIVER	
1988/03/25	E102701	3001184 L A L 7576 FL 36923 LILLOOET DIST	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0	PUBFA	2,000.00 GD	Jan 01	Dec 31		APP APPLIC-CLEARED
Seton River		MR103A	Y5 N					02D ASH - BRIDGE RIVER	
1992/11/09	E105644	3002340 ALL THE LANDS WITHIN THE BOUNDARIES O F THE CORPORATION OF THE VILLAGE OF LILLOOET AND THE LILLOOET INDIAN BAND RESERVE	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0	DOM	1,500,000.00 GD	Jan 01	Dec 31		APP APPLIC-CLEARED
Seton River		MR103C	R5 N					02D ASH - BRIDGE RIVER	
1993/06/30	E106803	3002519 LILLOOET INDIAN RESERVE FILE 987/32-4 5-4 (PARCEL H & LOT 67 & LOT 6 & LOT 46 & LOT 2330	AINSWORTH LUMBER CO LTD 533 NICOLA ST KAMLOOPS BC V2C2P9	FPREV	0.00 CS	Jan 01	Dec 31		APP APPLIC-CLEARED
Seton River		MR102C	L5 N					02D ASH - BRIDGE RIVER	

Stream Register Report

Water Licence Information System

DATE: 1996/05/07
TIME: 13:57
PAGE: 003

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source	WR Map	POD RED POD Comments						Proc	
1994/08/22	5106627	3002769 DL 531 LD	FISHERIES BRANCH 1259 DALHOUSIE DR KAMLOOPS BC V2C5Z5	CONST	50.00 AM	Jan 01	Dec 31		APP APPLIC-CLEARED
Seton River	WR102	T4 N						02D A6H - BRIDGE RIVER	
1994/08/22	5106629	3002770 DL145 LD	FISHERIES BRANCH 1259 DALHOUSIE DR KAMLOOPS BC V2C5Z5	CONST	50.00 AM	Jan 01	Dec 31		APP APPLIC-CLEARED
Seton River	WR102	T4 N						02D A6H - BRIDGE RIVER	

---------- Total of 12 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:45
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PD47472 - 101 88
END POINT : 807931 - Towinock Creek right of Fraser River

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source	WR Map	POD RED POD Comments					Prac	
1870/09/12	F006163	0241110 25.5 AC OF TOWINOCK IR LILL #2 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8139 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	1,000.00 GD 76.50 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Towinock Creek Towinock Creek	WR101 WR101	G N F N					02D ASH - BRIDGE RIVER	
1942/06/09	C065077	0147011 9.3 AC OF L 1 OF L 3094 PLAN 35987 L 1247 LILLOOET DIST	SCHELLER GORDON L BOX 501 LILLOOET BC V0K1V0	IRR	27.90 AF	Apr 01	Sep 30		
	Towinock Creek	WR101	BB N					02D ASH - BRIDGE RIVER	
1942/06/09	F015693	0147012 2.1 AC OF L 320 LILLOOET DIST	OLD ALBERT C & FRANCES M BOX 772 LILLOOET B C V0K1V0	IRR	6.30 AF	Apr 01	Sep 30		
	Towinock Creek	WR101	A N					02D ASH - BRIDGE RIVER	
1949/12/21	C065074	0182202 16.67 AC OF L 1 OF L 3094 & 1247 LILLOOET DIST PLAN 35987	SCHELLER GORDON L BOX 501 LILLOOET BC V0K1V0	IRR	50.00 AF	Apr 01	Sep 30		
	Towinock Creek	WR101	BB N					02D ASH - BRIDGE RIVER	
1949/12/21	C065075	3000546 37.33 AC OF L 292 LILLOOET DIST EXC PLAN 30481	SCHELLER GORDON L BOX 501 LILLOOET BC V0K1V0	IRR	112.00 AF	Apr 01	Sep 30		T/A TRANSFER/APPURT PEND
	Towinock Creek	WR101	BB N					02D ASH - BRIDGE RIVER	

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD RED POD Comments					Prec	
1979/03/05	C057481	0365249	10 AC OF L 328 LILLOOET DIST, EXC PLAN 31816	OLD ALBERT C & FRANCES M BOX 772 LILLOOET B C V0K1V0	IRR	10.00 AF	Apr 01	Sep 30		
	Towinock Creek		WR101	A H					02D ASH - BRIDGE RIVER	
1979/03/29	C057392	0365361	5 AC OF L 3043 LILLOOET DIST	EHRHARDT EDMUND H K PO BOX 88025 RICHMOND BC V6X3T6	DOM IRR	1,000.00 GD 15.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Towinock Creek		WR101	Q3 H					02D ASH - BRIDGE RIVER	
1979/03/29	C057393	0365361	PWRHOUSE SITE SIT WITHIN L 3043 LILLOOET DIST	EHRHARDT EDMUND H K PO BOX 88025 RICHMOND BC V6X3T6	PRCON	3.00 CS	Jan 01	Dec 31		
	Towinock Creek		WR101	Q3 H					02D ASH - BRIDGE RIVER	
1981/06/04	C057806	0368708	1 AC OF L 1 OF L 328 LILLOOET DIST PLAN 31816	DELONG DONALD G & MARIE S BOX 1288 LILLOOET BC V0K1V0	DOM IRR	500.00 GD 3.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Towinock Creek		WR101	S3 H					02D ASH - BRIDGE RIVER	

---------- Total of 9 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/06/11 08:26
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD47372 - 102 HH
END POINT : SO8026 - Town Creek right of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1861/10/10	C020501	0242346	WWK UNDERTAKING OF THE LICENSEE LILLOOET DIST	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0		WWELA	73,000,000.00 GY	Jan 01	Dec 31	
	Town Creek		WR102A	24	N				02D ASH - BRIDGE RIVER	
1865/12/15	C023618	0242347	WWKB UNDERTAKING OF THE LICENSEE LILLOOET DIST	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0		WWELA	3,650,000.00 GY	Jan 01	Dec 31	
	Town Creek		WR102A	24	N				02D ASH - BRIDGE RIVER	
1876/09/13	C027544	0243843	ALL THE LANDS WITHIN THE BDYS OF	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0		WWELA	13,359,000.00 GY	Jan 01	Dec 31	
	Town Creek		WR102A	U	N				02D ASH - BRIDGE RIVER	
1876/09/13	P017946	0242348	7 AC OF L 1,2 & 3 BLK 5 LILLOOET SBSN LILLOOET DIST	WALM ROBERT A & MONICA BOX 932 LILLOOET BC V0K1V0		DOM IRR	500.00 GD 31.80 AF	Jan 01 Apr 01	Dec 31 Sep 30	
	Town Creek		WR102A	U	N				02D ASH - BRIDGE RIVER	
1903/05/13	C065666	0261105	LILLOOET IR #1 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0		WWIOT IRR	11,000.00 GD 57.53 AF	Jan 01 Apr 01	Dec 31 Sep 30	AMD UNDER AMENDMENT
	Town Creek		WR102	HH	Y REDIVERSION FROM K 92.J.060 TYEE JIMMIE				02D ASH - BRIDGE RIVER	
	Tyee Jimmie Creek		WR92.J.060	K	N REDIVERSION AT HH 102 TOWN CR					

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	POC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source	WR Map	POD	RED POD Comments					Proc	
1961/10/19	C028496	0239007	WITHIN THE BOYS	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0	WWELA	73,000,000.00 GV	Jan 01	Dec 31		
	Town Creek	WR102A	I4	Y REDIVERSION FROM K 92.J.080 TYEE JIMMIE					02D ASH - BRIDGE RIVER	
	Tyee Jimmie Creek	WR92.J.080	K	N REDIVERSION AT I4 102A TOWN CR						
1987/06/05	C065665	0261105	LILLOOET IR 01 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	WWEOT	11,000.00 GD	Jan 01	Dec 31		AMD UNDER AMENDMENT
	Town Creek	WR102	HH	Y REDIVERSION FROM K 92.J.080 TYEE JIMMIE					02D ASH - BRIDGE RIVER	
	Tyee Jimmie Creek	WR92.J.080	K	N REDIVERSION AT HH 102 TOWN CR						

---------- Total of 7 Licencee Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/05/30 11:30
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : F047341 - 102A LL
END POINT : S08035 - Tribal Spring

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	POC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD	RED POD Comments				Prec	
1991/02/21	POO8293	0241104 9.9 AC OF SE PORTION LILLOOET IR 81 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	DOM IRR	2,000.00 GD 30.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
Tribal Spring		WR102A	LL	N				02D ASN - BRIDGE RIVER	
Rancherie Spring		WR102A	JJ	N					

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/06/11 12:32
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FO47818 - 92.J.080 K
END POINT : SO8047 - Tyee Jimmie Creek right of Dickey Creek

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	POC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
Source		WR Map	POD	RED	POD Comments			Proc	
1903/05/13	C065664	0241105	LILLOOET IR #1 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	WWROT IRR	11,000.00 GD 57.53 AF	Apr 01 Apr 01	Sep 30 Sep 30	AND UNDER AMENDMENT
Tyee Jimmie Creek Town Creek		WR92.J.080 WR102	E N HH Y	REDIVERSION AT HH 102 TOWN CR REDIVERSION FROM E 92.J.080 TYEE JIMMIE				02D ASH - BRIDGE RIVER	
1961/10/19	C028696	0239007	WITHIN THE HUYS	LILLOOET VILLAGE OF BOX 610 LILLOOET BC V0K1V0	WWLA	73,000,000.00 GY	Jan 01	Dec 31	
Tyee Jimmie Creek Town Creek		WR92.J.080 WR102A	E N I4 Y	REDIVERSION AT I4 102A TOWN CR REDIVERSION FROM E 92.J.080 TYEE JIMMIE				02D ASH - BRIDGE RIVER	
1987/06/08	C065665	0241105	LILLOOET IR #1 LILLOOET DIST	LILLOOET INDIAN BAND 987-593-8143 PO BOX 615 LILLOOET BC V0K1V0	WWROT	11,000.00 GD	Oct 01	Mar 31	AND UNDER AMENDMENT
Tyee Jimmie Creek Town Creek		WR92.J.080 WR102	E N HH Y	REDIVERSION AT HH 102 TOWN CR REDIVERSION FROM E 92.J.080 TYEE JIMMIE				02D ASH - BRIDGE RIVER	

---------- Total of 3 Licences Reported ----------

DICKEBUSCH CREEK NEAR THE MOUTH - STATION NO. 07FB004

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1978	0.023	0.022	0.025	0.104	1.24	1.15	0.502	0.246	0.318	0.140	0.121	0.031	0.329	1978
1979	0.009	0.003	0.014	1.10	6.74	1.98	1.25	0.227	0.164	0.071	0.007	0.005	0.974	1979
80	0.002	0	0.005	0.224	0.765	3.07	1.23	1.23	1.19	0.440	0.219	0.156	0.710	1980
1981	0.177	0.117	0.114	1.01	3.47	1.84	0.596	0.206	0.088	0.074	0.040	0.006	0.648	1981
1982	0.001	0.004	0.009	0.021	1.96	1.26	1.91	1.69	0.241	0.422	0.217	0.078	0.828	1982
1983	0.032	0.018	0.015	0.696	1.62	2.34	4.17	0.240	0.123	0.147	0.069	0.006	0.796	1983
1984	0.002	0.014	0.039	0.255	1.91	1.73	0.272	0.162	0.548	0.767	0.328	0.145	0.515	1984
1985	0.083	0.046	0.057	0.688	1.76	0.520	0.118	0.171	1.13	0.442	0.085	0.061	0.431	1985
1986	0.057	0.038	0.050	0.392	2.95	1.39	1.00	0.193	0.271	0.497	0.115	0.104	0.593	1986
1987	0.090	0.082	0.068	0.946	1.21	0.246	0.559	6.54	0.187	0.109	0.082	0.029	0.857	1987
1988	0.015	0.024	0.035	0.885	0.622	1.36	0.210	0.113	0.093	0.094	0.020	0.028	0.290	1988
1989	0.010	0.004	0.004	0.213	0.914	0.765	0.448	0.704	0.285	0.347	0.143	0.092	0.330	1989
1990	0.048	0.018	0.076	0.660	2.51	7.40	0.398	0.199	0.087	0.055	0.026	0.037	0.955	1990
MEAN	0.042	0.030	0.039	0.553	2.13	1.93	1.13	0.917	0.364	0.277	0.113	0.060	0.635	MEAN

LOCATION - LAT 55 32 07 N LONG 121 35 40 W DRAINAGE AREA, 85.5 km²
NATURAL FLOW

DICKEBUSCH CREEK NEAR THE MOUTH - STATION NO. 07FB004

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m^3/s)	MAXIMUM DAILY DISCHARGE (m^3/s)	MINIMUM DAILY DISCHARGE (m^3/s)	TOTAL DISCHARGE (dam^3)	YEAR
1978	2.83 AT 02:43 PST ON JUN 06	2.53 ON JUN 06	0.017B ON DEC 31	10 400	1978
1979	---	12.5 E ON MAY 28	0.002B ON FEB 19	30 700	1979
1980	---	13.5 E ON JUN 19	0 B ON JAN 25 *	22 500	1980
1981	12.5 AT 19:21 PST ON MAY 31	8.48A ON JUN 01	0 B ON DEC 11	20 400	1981
1982	---	16.1 E ON JUL 15	0 B ON JAN 01	26 100	1982
1983	36.6 AT 15:37 PST ON JUL 14	21.4 ON JUL 15	0.001B ON DEC 18	25 100	1983
1984	5.75 AT 06:38 PST ON MAY 17	5.51 ON MAY 17	0.001B ON JAN 01	16 300	1984
1985	5.09 AT 16:05 PST ON SEP 13	4.00 ON SEP 13	0.035B ON FEB 08	13 600	1985
1986	6.39 AT 22:33 PST ON MAY 26	5.39 ON MAY 26	0.025B ON FEB 18	18 700	1986
1987	273 E AT 10:07 PST ON AUG 01 *	89.4 E ON AUG 01 *	0.019B ON DEC 31	27 000	1987
1988	13.9 AT 18:18 PST ON JUN 06	7.71 ON JUN 07	0.004B ON JAN 30	9 160	1988
1989	3.47 AT 15:55 PST ON JUN 27	2.70 ON JUN 27	0 B ON FEB 02	10 400	1989
1990	99.5 E AT 19:49 PST ON JUN 11	72.7 E ON JUN 12	0.008B ON FEB 14	30 100	1990
				20 000	MEAN

A - MANUAL GAUGE (SEE REFERENCE INDEX) B - ICE CONDITIONS E - ESTIMATED * - EXTREME RECORDED FOR THE PERIOD OF RECORD

DICKEY CREEK NEAR LILLOOET - STATION NO. 08ME012

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1928	---	---	---	0.052	0.187	0.164	0.186	0.126	0.100	---	---	---	---	1928
1929	---	---	---	---	---	---	0.090	0.080	0.063	---	---	---	---	1929
1930	---	---	---	---	0.104	0.149	0.125	0.151	0.076	---	---	---	---	1930
1931	---	---	---	0.037	0.072	0.080	0.077	0.072	0.062	---	---	---	---	1931
1962	---	---	---	---	0.109	0.145	0.199	0.113	0.092	---	---	---	---	1962
1965	---	---	---	---	---	0.222	0.140	0.104	0.237	---	---	---	---	1965
1966	---	---	---	---	0.293	0.245	0.280	---	---	---	---	---	---	1966
MEAN	---	---	---	0.045	0.153	0.168	0.157	0.108	0.105	---	---	---	---	MEAN

LOCATION - LAT 50 44 10 N LONG 121 56 30 W DRAINAGE AREA, 14.8 km²
REGULATED SINCE 1966

DICKEY CREEK NEAR LILLOOET - STATION NO. 08ME012

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m^3/s)	MAXIMUM DAILY DISCHARGE (m^3/s)	MINIMUM DAILY DISCHARGE (m^3/s)	TOTAL DISCHARGE (dam^3)	YEAR
1928	---	0.340E ON MAY 18	0.017E ON APR 01 *	---	1928
1929	---	---	0.045 ON SEP 13	---	1929
1930	---	0.385 ON AUG 03	0.040 ON APR 12	---	1930
1931	---	0.091 ON JUN 15	0.031 ON APR 13	---	1931
1962	---	0.238 ON JUL 19	0.057 ON APR 10	---	1962
1965	---	0.391 ON MAY 30	0.065 ON AUG 09	---	1965
1966	---	0.504 ON JUL 24 *	---	---	1966
				---	MEAN

E - ESTIMATED * - EXTREME RECORDED FOR THE PERIOD OF RECORD

RICHTER CREEK NEAR OSOYOOS - STATION NO. 08NL040

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1967	---	---	---	---	---	0.040	0.012	0.006	0.006	0.007	0.006	0.005	---	1967
1968	0.005	0.005	0.004	0.004	0.009	0.013	0.008	0.006	0.005	0.005	0.005	0.005	0.006	1968
1969	0.003	0.003	0.004	0.007	0.037	0.015	0.011	0.009	0.007	0.007	0.006	0.006	0.010	1969
1970	0.005	0.005	0.004	0.004	0.003	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.004	1970
1971	0.003	0.003	0.002	0.002	0.021	0.012	0.008	0.007	0.007	0.006	0.005	0.005	0.007	1971
1972	0.004	0.004	0.004	0.008	0.060	0.032	0.016	0.012	0.011	0.008	0.007	0.008	0.015	1972
1973	0.008	0.007	0.007	0.007	0.005	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.005	1973
1974	0.003	0.003	0.003	0.022	0.098	0.042	0.023	0.014	0.010	0.009	0.008	0.008	0.020	1974
MEAN	0.004	0.004	0.004	0.008	0.033	0.020	0.011	0.008	0.007	0.006	0.006	0.005	0.010	MEAN

LOCATION - LAT 49 03 16 N LONG 119 37 58 W DRAINAGE AREA, 15.3 km²
NATURAL FLOW

RICHTER CREEK NEAR OSOYOOS - STATION NO. 08NL040

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m³/s)	MAXIMUM DAILY DISCHARGE (m³/s)	MINIMUM DAILY DISCHARGE (m³/s)	TOTAL DISCHARGE (dam³)	YEAR
1967	---	---	---	---	1967
1968	---	0.017 ON MAY 21	0.002E ON DEC 31 *	196	1968
1969	---	0.057 ON MAY 13	0.002E ON JAN 01	302	1969
1970	---	0.007 ON JUN 30	0.002E ON JUN 01	126	1970
1971	---	0.028 ON MAY 04	0.002E ON FEB 10	216	1971
1972	---	0.122 ON MAY 21	0.003E ON JAN 23	460	1972
1973	---	0.008E ON JAN 01 *	0.003E ON JUL 08	146	1973
1974	---	0.161E ON MAY 08 *	0.002E ON JAN 08	642	1974
	E - ESTIMATED	* - EXTREME RECORDED FOR THE PERIOD OF RECORD		298	MEAN

RIDDLE CREEK NEAR WEST SUMMERLAND - STATION NO. 08NM070

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1930	---	---	---	---	0.040	0.082	0.013	0	0.002	---	---	---	---	1930
1931	---	---	---	0.011	0.063	0.026	0.009	0	0.001	---	---	---	---	1931
MEAN	---	---	---	0.011	0.052	0.054	0.011	0	0.002	---	---	---	---	MEAN

LOCATION - LAT 49 30 30 N LONG 119 47 30 W DRAINAGE AREA, 33.4 km²
NATURAL FLOW

RIDDLE CREEK NEAR WEST SUMMERLAND - STATION NO. 08NM070

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m³/s)	MAXIMUM DAILY DISCHARGE (m³/s)	MINIMUM DAILY DISCHARGE (m³/s)	TOTAL DISCHARGE (dam³)	YEAR
1930	---	---	0 ON AUG 01 *	---	1930
1931	---	0.113 ON MAY 14 *	0 ON JUL 15	---	1931
		* - EXTREME RECORDED FOR THE PERIOD OF RECORD		---	MEAN

RILEY CREEK NEAR LILLOOET - STATION NO. 08MF014

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1914	---	---	---	---	---	---	---	0.294	0.311	---	---	---	---	1914
1921	---	---	---	0.151	0.636	1.35	1.08	0.614	0.340	---	---	---	---	1921
1938	---	---	---	---	0.347	0.761	0.461	0.235	0.242	0.168	---	---	---	1938
1939	---	---	---	0.097	0.208	0.848	0.936	0.283	0.155	0.135	---	---	---	1939
1940	---	---	---	0.069	0.184	0.842	0.282	0.137	0.104	0.088	---	---	---	1940
1941	---	---	---	0.071	0.114	0.344	0.289	0.142	0.200	0.187	---	---	---	1941
1971	---	---	---	---	0.440	0.524	0.461	0.328	0.176	---	---	---	---	1971
1972	---	---	---	0.053	0.453	2.26	1.51	0.402	0.215	---	---	---	---	1972
1973	---	---	---	0.088	0.289	0.341	0.308	0.205	0.124	---	---	---	---	1973
1975	---	---	---	---	0.256	0.897	1.31	0.598	0.444	---	---	---	---	1975
1980	---	---	---	0.031	0.169	0.833	1.19	0.790	0.304	---	---	---	---	1980
MEAN	---	---	---	0.080	0.310	0.900	0.783	0.366	0.240	0.145	---	---	---	MEAN

LOCATION - LAT 50 35 04 N LONG 121 52 02 W DRAINAGE AREA, 19.2 km²
NATURAL FLOW

SETON RIVER NEAR LILLOOET - STATION NO. 08ME003

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1914	---	---	---	10.3	28.7	52.3	67.9	26.9	13.9	14.4	14.4	10.8	---	1914
1915	7.88	6.51	6.07	11.3	29.4	41.0	41.9	31.7	16.6	7.36	7.23	7.64	18.0	1915
1916	4.17	3.97	5.31	7.78	33.8	56.7	77.3	39.7	22.2	10.7	7.32	6.04	23.0	1916
1917	11.77	7.94	5.93	4.18	6.70	38.9	44.8	28.2	15.3	9.85	7.60	8.95	14.8	1917
1918	11.4	7.62	5.77	8.67	23.0	70.4	88.1	41.0	19.9	---	---	---	---	1918
1924	---	---	---	---	---	---	---	---	15.4	10.7	9.98	7.58	---	1924
1925	7.23	6.77	5.57	7.81	36.5	61.7	40.5	25.8	14.9	6.38	4.53	4.91	18.6	1925
1926	4.53	4.72	4.65	7.07	16.8	22.0	28.2	17.2	---	---	---	---	---	1926
1950	---	---	---	---	50.3	100	94.3	63.7	51.4	---	50.1	48.9	---	1950
1951	49.2	48.1	47.8	60.7	70.4	95.2	105	75.9	64.3	49.6	45.0	49.5	63.5	1951
1952	51.2	45.4	40.5	43.9	60.4	84.8	88.8	66.2	57.2	55.9	50.4	49.0	57.9	1952
1953	44.4	46.3	41.2	29.9	56.2	78.8	91.1	76.0	62.7	58.9	54.9	48.4	57.5	1953
1954	48.6	47.2	36.0	41.6	49.8	83.5	107	94.5	85.4	66.2	60.1	66.6	65.7	1954
1955	---	---	62.7	62.0	56.6	101	111	87.7	77.0	69.8	69.5	74.8	---	1955
1956	72.4	74.2	69.2	82.2	104	128	128	83.5	---	8.78	10.1	6.49	---	1956
1957	---	5.98	6.05	5.90	11.0	---	11.9	11.3	12.4	10.5	8.88	7.23	---	1957
1958	6.24	6.40	6.27	6.35	6.01	22.3	13.2	6.48	10.8	12.0	10.5	6.86	9.44	1958
1959	5.97	6.05	5.66	5.02	5.31	13.5	17.8	11.9	11.9	12.6	8.98	6.11	9.25	1959
1960	5.61	5.11	8.20	6.37	7.87	11.4	22.9	12.3	11.6	12.2	9.57	6.60	10.0	1960
1961	5.44	5.51	5.50	5.90	23.4	30.6	8.31	10.9	16.6	11.1	14.2	15.2	13.0	1961
1962	16.5	17.2	28.7	18.2	24.4	29.4	14.9	26.9	8.07	8.07	7.60	5.25	17.1	1962
1963	19.1	19.6	28.4	4.94	16.1	49.6	14.2	17.1	33.0	26.0	19.5	16.0	20.1	1963
1964	16.1	19.4	21.9	28.5	15.9	67.2	38.2	52.2	44.1	16.1	14.2	18.4	29.3	1964
1965	10.7	8.78	33.6	13.7	14.0	12.2	10.7	19.7	15.4	29.9	31.4	30.7	19.3	1965
1966	29.5	30.6	38.4	33.6	28.7	28.6	43.5	36.7	23.8	16.5	12.0	12.6	28.1	1966
1967	16.1	25.9	51.0	31.5	30.5	99.4	53.8	16.3	32.1	27.3	32.3	32.6	37.5	1967
1968	32.2	49.4	39.7	44.4	37.4	43.8	72.4	34.0	20.0	31.2	15.1	29.7	37.7	1968
1969	24.1	36.3	21.5	22.3	17.7	46.1	29.2	30.5	9.23	9.63	14.5	10.5	22.5	1969
1970	13.5	9.68	9.54	9.99	9.48	54.2	9.91	9.06	8.95	8.86	8.92	8.95	13.4	1970
1971	22.5	32.2	17.6	102	130	98.3	7.05	15.9	7.17	8.12	8.93	8.73	38.1	1971
1972	---	---	9.63	9.29	12.2	110	17.2	19.1	9.46	8.17	8.09	7.90	---	1972
1973	7.79	8.64	27.9	31.5	9.14	15.0	9.25	49.3	19.5	11.4	8.34	9.77	14.3	1973
1974	5.02	38.5	31.5	4.41	4.10	36.8	11.7	77.9	37.5	25.5	7.57	7.19	23.9	1974
1975	---	7.85	7.13	22.6	6.81	6.74	14.1	30.7	19.6	17.9	8.09	5.82	---	1975
1976	5.18	10.2	17.1	36.2	39.1	82.3	12.7	34.4	29.5	36.4	19.3	8.51	27.3	1976
1977	7.13	6.96	7.12	13.0	13.7	53.7	92.0	83.7	11.4	11.7	10.5	6.96	26.7	1977
1978	6.40	6.55	6.86	9.98	12.4	22.4	10.0	20.6	14.3	18.5	13.2	7.35	12.2	1978
1979	7.11	6.29	6.82	7.60	7.61	17.7	8.27	20.2	13.8	14.8	14.8	8.53	11.1	1979
1980	8.39	8.52	7.71	7.71	9.86	10.7	13.0	16.1	11.9	11.9	10.8	6.98	10.3	1980
1981	7.41	7.08	6.83	6.49	6.33	6.26	20.0	60.2	30.2	12.5	16.9	6.18	15.6	1981
1982	6.38	6.72	6.43	6.48	17.4	51.9	32.1	53.3	30.2	13.1	12.6	6.19	21.9	1982
1983	6.54	6.58	5.91	5.91	11.6	76.6	28.5	49.9	25.8	12.3	12.0	8.44	20.8	1983
1984	7.81	6.96	19.3	22.7	7.98	8.08	36.4	25.1	11.5	31.0	10.3	6.50	16.0	1984
1985	6.67	21.3	35.9	29.1	13.4	19.3	11.9	11.8	12.0	12.5	9.39	6.74	15.8	1985
1986	6.31	6.09	5.99	5.66	7.75	8.38	12.4	11.6	12.7	12.5	10.1	7.77	14.2	1986
1987	5.99	6.16	6.21	7.67	12.2	6.87	54.8	24.6	12.7	12.9	10.6	6.45	14.1	1987
1988	7.39	7.34	7.32	7.05	11.1	7.63	9.82	12.7	11.3	11.4	9.50	6.28	9.59	1988
1989	5.61	5.56	5.36	5.13	7.60	4.66	8.46	11.8	12.4	12.2	9.85	6.66	7.94	1989
1990	7.24	6.71	6.39	6.03	5.73	16.6	7.04	13.9	13.7	13.5	13.7	7.81	9.86	1990
MEAN	15.4	17.9	19.1	20.4	25.4	46.3	39.4	36.5	24.7	19.8	17.5	15.7	23.2	MEAN

LOCATION - LAT 50 40 20 N DRAINAGE AREA, 1 040 km²
LONG 121 58 10 W REGULATED

SETON RIVER NEAR LILLOOET - STATION NO. 08ME003

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m^3/s)	MAXIMUM DAILY DISCHARGE (m^3/s)	MINIMUM DAILY DISCHARGE (m^3/s)	TOTAL DISCHARGE (dam^3)	YEAR
1914	---	79.3 ON JUL 19	---	---	1914
1915	---	49.8 ON JUL 07	5.66 ON MAR 08	567 000	1915
1916	---	102 ON JUL 08	3.68 ON JAN 17	728 000	1916
1917	---	49.8 ON JUL 18	3.68 ON FEB 25	467 000	1917
1918	---	130 ON JUN 24	---	---	1918
1924	---	---	---	---	1924
1925	---	76.5 ON JUN 02	4.53 ON OCT 25	587 000	1925
1926	---	35.7 ON JUL 11	---	---	1926
1950	---	173 ON JUN 22	---	---	1950
1951	---	122 A ON JUN 18	41.1 ON NOV 17	2 000 000	1951
1952	101 AT 01:00 PST ON JUL 17	98.8 ON JUL 17	36.8 ON MAR 03	1 830 000	1952
1953	105 AT 18:00 PST ON JUL 15	104 ON JUL 15	26.6 ON APR 06	1 810 000	1953
1954	120 AT 19:00 PST ON JUL 22	118 ON JUL 21	32.8 ON MAR 22	2 070 000	1954
1955	---	133 A ON JUN 29	35.1 A ON FEB 26	---	1955
1956	---	151 ON JUL 29	6.09 ON NOV 29	---	1956
1957	---	159.2A ON JUL 29	4.81A ON JUL 12	---	1957
1958	111 AT 21:15 PST ON JUN 05	108 ON JUN 05	4.11 ON SEP 07	298 000	1958
1959	100 AT 14:00 PST ON MAY 22	38.8 ON JUL 21	4.11 ON MAY 30	292 000	1959
1960	103 AT 21:00 PST ON JUL 02	84.4 ON JUL 02	4.11 ON MAR 18	317 000	1960
1961	126 AT 19:00 PST ON MAY 16	92.0 ON MAY 17	4.67 ON MAR 02	410 000	1961
1962	112 AT 01:00 PST ON AUG 08	107 ON AUG 07	4.90 ON DEC 30	539 000	1962
1963	119 AT 01:00 PST ON AUG 09	119 ON AUG 09	3.54 ON JUL 03	949 000	1963
1964	144 AT 08:45 PST ON JUL 21	118 ON JUN 19	4.45 ON MAY 27	926 000	1964
1965	118 AT 05:00 PST ON MAR 16	118 ON MAR 15	4.39 ON AUG 09	610 000	1965
1966	98.0 AT 18:00 PST ON MAR 30	97.7 ON MAR 30	11.6 ON DEC 06	885 000	1966
1967	149 AT 20:15 PST ON JUN 23	147 ON JUN 22	9.83 ON JUL 27	1 180 000	1967
1968	141 AT 14:49 PST ON FEB 28	129 ON FEB 28	10.2 ON NOV 24	1 190 000	1968
1969	141 AT 19:47 PST ON AUG 19	132 ON AUG 20	8.58 ON SEP 09	710 000	1969
1970	136 AT 00:18 PST ON JUN 23	133 ON JUN 24	8.24 ON JUN 14	422 000	1970
1971	182 AT 20:45 PST ON JUN 02	176 ON JUN 03	5.95 ON JUN 29	1 200 000	1971
1972	167 AT 19:15 PST ON JUN 05	148 ON JUN 10	6.60 ON APR 03	---	1972
1973	127 AT 17:47 PST ON MAR 27	126 ON MAR 28	5.64 ON DEC 10	451 000	1973
1974	141 AT 07:55 PST ON AUG 02	129 ON AUG 08	2.86 ON JUL 02 *	753 000	1974
1975	121 AT 16:30 PST ON APR 08	121 ON APR 09	5.35 ON DEC 31	---	1975
1976	181 AT 10:00 PST ON JUN 02	177 ON JUN 03 *	4.87 ON JAN 15	865 000	1976
1977	204 AT 16:39 PST ON JUL 26 *	167 ON AUG 12	6.46 ON DEC 26	842 000	1977
1978	65.1 AT 19:36 PST ON JUN 06	62.3 ON JUN 06	5.13 ON JUL 08	383 000	1978
1979	49.0 AT 01:00 PST ON JUN 02	46.8 ON JUN 02	6.09A ON FEB 20	351 000	1979
1980	35.3 AT 19:20 PST ON JUL 24	34.8 ON JUL 25	5.76 ON JUL 18	326 000	1980
1981	132 AT 21:20 PST ON JUL 24	124 ON JUL 24	6.03 ON JUN 07	492 000	1981
1982	167 AT 15:30 PST ON JUN 24	146 ON JUN 21	5.23 ON JUL 09	692 000	1982
1983	158 AT 08:10 PST ON JUN 30	152 ON JUN 25	5.61 ON MAY 13	657 000	1983
1984	191 AT 15:05 PST ON JUL 27	174 ON JUL 29	5.21 ON MAY 14	508 000	1984
1985	133 AT 11:45 PST ON MAY 28	71.8 ON APR 07	4.96 ON JUN 09	498 000	1985
1986	66.1 AT 12:00 PST ON SEP 01	65.8 ON SEP 01	5.12 ON MAY 20	383 000	1986
1987	131 AT 16:05 PST ON JUL 13	84.0 ON JUL 13	5.14 ON MAY 30	446 000	1987
1988	79.8 AT 18:25 PST ON MAY 25	59.9 ON MAY 25	5.97 ON NOV 18	303 000	1988
1989	49.1 AT 10:45 PST ON MAY 07	47.8 ON MAY 08	3.52 ON JUN 09	251 000	1989
1990	35.3 AT 12:27 PST ON JUN 06	34.4 ON JUN 06	5.05 ON JUN 03	311 000	19$
				731 000	MEAN

A - MANUAL GAUGE
(SEE REFERENCE INDEX)

* - EXTREME RECORDED FOR THE PERIOD OF RECORD

SEYMOUR RIVER ABOVE INTAKE - STATION NO. 08GA013

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1914	32.6	9.15	21.5	26.5	25.9	19.4	9.04	1.94	15.1	34.7	43.7	5.30	20.4	1914
1915	11.6	12.0	19.8	33.5	15.3	6.05	2.49	1.36	1.59	39.1	13.4	24.7	15.1	1915
1916	3.81	32.7	27.6	20.0	35.0	33.6	28.1	7.36	2.08	5.18	14.0	7.66	17.2	1916
1917	6.87	9.09	4.54	16.4	32.7	34.3	22.6	4.37	7.16	11.2	26.7	49.7	18.8	1917
1918	35.9	16.7	24.7	24.3	22.4	21.8	6.13	5.20	1.64	24.2	19.1	23.7	18.9	1918
1919	17.9	14.3	9.22	26.4	33.9	25.2	20.8	5.47	1.63	1.82	46.9	43.8	20.6	1919
1920	21.0	12.1	11.7	7.88	15.1	29.8	5.32	3.15	46.3	35.4	28.9	25.9	20.2	1920
1921	19.0	26.8	13.4	19.6	33.0	41.6	18.4	8.27	32.6	69.8	18.0	25.0	27.1	1921
1922	3.72	5.62	3.56	11.9	35.1	39.6	9.71	4.69	16.7	15.2	9.06	33.5	15.7	1922
1923	15.8	8.25	7.72	15.2	23.7	16.6	6.43	2.14	2.87	10.9	18.6	32.0	13.4	1923
1924	27.5	43.4	5.66	---	---	---	---	---	---	52.5	24.4	21.9	---	1924
1925	15.8	25.2	13.2	---	30.3	16.3	7.52	6.68	3.00	1.89	19.2	34.0	---	1925
1926	9.71	19.8	14.0	14.6	14.9	7.49	2.15	7.87	9.69	23.9	22.3	19.9	13.6	1926
1927	18.5	13.9	12.3	16.9	30.8	32.3	13.3	4.16	15.4	29.0	20.3	10.2	18.1	1927
1928	31.4	8.23	18.8	11.0	21.1	8.94	2.32	0.373	3.56	33.1	18.4	10.6	14.1	1928
1929	3.12	0.389	8.70	11.5	20.5	20.9	5.92	2.42	0.853	10.1	1.54	16.3	8.59	1929
1930	2.45	31.2	9.51	26.4	14.9	13.4	2.28	1.67	5.30	8.31	10.1	10.1	11.1	1930
1931	27.9	8.01	17.3	20.1	15.0	15.2	5.31	1.06	11.7	15.7	17.8	14.8	13.9	1931
1932	7.68	15.9	14.4	19.9	20.6	42.3	13.7	3.21	2.25	11.6	28.9	13.4	14.4	1932
1933	10.7	2.98	10.3	9.44	22.3	29.1	23.3	5.83	18.5	16.3	10.2	21.3	15.1	1933
1934	21.4	18.4	14.7	13.8	14.9	4.03	6.34	3.29	4.73	---	---	---	---	1934
MEAN	16.4	15.9	13.5	18.2	23.4	21.9	10.4	4.03	9.97	22.5	20.6	22.2	16.5	MEAN

LOCATION - LAT 49 23 53 N
LONG 122 59 04 W

DRAINAGE AREA 153 km^2
REGULATED SINCE 1927

TOPPING (STONY) CREEK NEAR TRAIL - STATION NO. 08NE033

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1928	---	---	---	---	1.74	0.297	0.109	0.042	0.010	---	---	---	---	1928
1929	---	---	---	---	0.706	0.548	0.138	0.021	0.009	---	---	---	---	1929
MEAN	---	---	---	---	1.22	0.423	0.124	0.032	0.010	---	---	---	---	MEAN

LOCATION - LAT 49 06 43 N LONG 117 45 00 W DRAINAGE AREA, 20.7 km² NATURAL FLOW

TOPPING (STONY) CREEK NEAR TRAIL - STATION NO. 08NE033

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m^3/s)	MAXIMUM DAILY DISCHARGE (m^3/s)	MINIMUM DAILY DISCHARGE (m^3/s)	TOTAL DISCHARGE (dam^3)	YEAR
1928	---	2.38E ON MAY 23 *	0E ON SEP 26 *	---	1928
1929	---	---	---	---	1929
	E - ESTIMATED	* - EXTREME RECORDED FOR THE PERIOD OF RECORD		---	MEAN

TOWN CREEK AT LILLOOET - STATION NO. 08ME013

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1928	---	---	---	---	---	0.041	0.030	0.022	0.017	---	---	---	---	1928
1929	---	---	---	0.020	0.025	0.025	0.022	0.011	0.012	---	---	---	---	1929
1930	---	---	---	0.016	0.020	0.027	0.029	0.025	0.021	---	---	---	---	1930
1931	---	---	---	0.012	0.018	0.020	0.019	0.013	0.014	---	---	---	---	1931
1955	---	---	---	0.028	0.036	0.093	0.107	0.071	0.038	---	---	---	---	1955
1956	---	---	---	0.027	0.074	0.070	0.059	0.049	0.038	---	---	---	---	1956
1957	---	---	---	---	0.050	0.067	0.061	0.047	0.034	---	---	---	---	1957
1958	---	---	---	0.029	0.069	0.132	0.085	0.059	0.040	---	---	---	---	1958
1962	---	---	---	---	0.035	0.046	0.054	0.042	0.034	---	---	---	---	1962
1963	---	---	---	0.022	0.029	0.038	0.043	0.035	0.038	---	---	---	---	1963
MEAN	---	---	---	0.022	0.040	0.056	0.051	0.038	0.033	---	---	---	---	MEAN

LOCATION - LAT 50 41 20 N LONG 121 57 10 W DRAINAGE AREA, 13.5 km² NATURAL FLOW

TOWN CREEK AT LILLOOET - STATION NO. 08ME013

ANNUAL EXTREMES OF DISCHARGE AND ANNUAL TOTAL DISCHARGE FOR THE PERIOD OF RECORD

YEAR	MAXIMUM INSTANTANEOUS DISCHARGE (m^3/s)	MAXIMUM DAILY DISCHARGE (m^3/s)	MINIMUM DAILY DISCHARGE (m^3/s)	TOTAL DISCHARGE (dam^3)	YEAR
1928	---	---	---	---	1928
1929	---	0.051 ON JUN 13 0.031 ON JUL 06	0.011E ON AUG 03 *	---	1929
1930	---	0.034 ON JUN 27	0.011E ON APR 01	---	1930
1931	---	0.025 ON JUN 21	0.011 ON APR 01	---	1931
1955	---	0.181 ON JUL 05	0.028E ON APR 01	---	1955
1956	---	0.136 ON MAY 25	0.023 ON APR 01	---	1956
1957	---	0.074 ON JUN 14	---	---	1957
1958	---	0.198 ON JUN 16 *	0.020 ON APR 01	---	1958
1962	---	0.065 ON JUL 06	---	---	1962
1963	---	0.059 ON JUL 08	0.016 ON APR 06	---	1963
	E - ESTIMATED	* - EXTREME RECORDED FOR THE PERIOD OF RECORD		---	MEAN

TRAIL CREEK AT FRENCH STREET,TRAIL - STATION NO. 08NE118

MONTHLY AND ANNUAL MEAN DISCHARGES IN CUBIC METRES PER SECOND FOR THE PERIOD OF RECORD

YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	MEAN	YEAR
1975	---	---	---	0.878	2.88	0.517	---	---	---	---	---	---	---	1975
1976	---	---	---	2.90	1.87	0.610	0.147	0.364	0.150	---	---	---	---	1976
1977	---	---	---	0.401	0.332	0.220	0.074	0.031	0.059	---	---	---	---	1977
1978	---	---	---	2.89	1.63	0.428	0.161	0.074	0.090	---	---	---	---	1978
1979	---	---	---	0.854	1.68	0.195	0.073	0.038	0.074	---	---	---	---	1979
1980	---	---	---	3.16	1.30	0.310	0.139	0.122	0.114	---	---	---	---	1980
1981	---	---	---	1.49	1.09	0.930	0.479	0.137	0.068	---	---	---	---	1981
1982	---	---	---	1.93	1.91	0.478	0.205	0.137	0.112	---	---	---	---	1982
1983	---	---	---	3.08	1.80	0.370	0.288	0.089	0.090	---	---	---	---	1983
1984	---	---	---	2.62	1.55	0.832	0.239	0.092	0.069	---	---	---	---	1984
1985	---	---	---	1.63	0.954	0.294	0.074	0.048	0.066	---	---	---	---	1985
1986	---	---	---	1.33	0.811	0.255	0.131	0.049	0.035	---	---	---	---	1986
1987	---	---	---	1.32	0.454	0.232	0.119	0.073	0.044	---	---	---	---	1987
1988	---	---	---	2.04	0.758	0.585	0.141	0.080	0.062	---	---	---	---	1988
1989	---	---	---	2.51	1.19	0.318	0.114	0.070	0.051	---	---	---	---	1989
MEAN	---	---	---	1.92	1.36	0.439	0.176	0.098	0.077	---	---	---	---	MEAN

LOCATION - LAT 49 05 47 N LONG 117 44 05 W DRAINAGE AREA, 51 km² REGULATED

MINISTRY OF ENVIRONMENT, LANDS & PARKS
Water Rights Information System
Summary Report (with legal descriptions and old coordinates)


WELL4600 Production

Operator Id GPSMTD

BCGS Map Area	Well No.	Well Tag No.	Lot No.	Plan No.	Blk No.	TP	SC	RG	D.L.	X	X	Y	Old Well No.	L.D.	Site Address	Date Constructed (dmy)	Well Depth (ft.)	Well Diam. (in.)	Drill Contr No.	Const. Method	Well Yield	Yld. Unt.	Depth to Water (ft.)	Depth to Bedrk (ft.)	Aquif Litho	Screen Interval (ft.)	G.W. Rpc	Chem Lab	Chem Fld	Chem Site No.
0921.061.2.1.3	001	0000000040219							4939	00	00	00	000	26		29-07-1978	605.0	6.0	016	DRI	7.0	GPM	185	12	RED					
0921.061.2.1.4	001	0000000039575							3090	00	00	00	000	29		25-04-1978	310.0	6.0	048	DRI	0.5	GPM	120	7	RED					
0921.061.3.2.2	001	0000000054208								07	15	02	001	29	TEXAS CREEK	24-10-1984	182.0	0.0	101	UNK	3.0	GPM	30	UNK	UNC	120-140				
0921.061.3.2.3	001	0000000043479							450	07	15	15	004	29		27-08-1979	80.0	6.0	016	DRI	50.0	GPM	24	UNK	UNC	75-78				
0921.061.3.2.3	002	0000000035814							3056	07	15	10	001	29		30-10-1976	460.0	0.0	101	DRI			UNK	142	UNC					
0921.061.3.2.3	003	0000000039700							3054	07	15	10	002	29	TEXAS CREEK RD	15-05-1978	190.0	6.0	048	DRI			UNK	49	RED					
0921.061.3.2.3	004	0000000053904	3	34019					3056	07	15	10	003	29	1/2 MILE OFF TEXAS C	15-08-1984	17.0	6.0	220	DRI	6.0	GPM	10	UNK	UNC					
0921.061.3.2.3	005	0000000053763							6705	00	00	00	000	29		14-07-1984	110.0	6.0	220	DRI			105	73	RED					
0921.061.3.2.3	006	0000000053769							6705	00	00	00	000	29		16-07-1984	35.0	6.0	220	DRI	10.0	GPM	3	10	RED					
0921.061.3.2.3	007	0000000000077							6705	00	00	00	000	29			150.0	6.0	220	DRI			UNK	UNK	UNC					
0921.061.3.2.4	001	0000000035704	5	26870					1295	07	15	11	001	29		16-09-1976	123.0	6.0	016	UNK			UNK	116	UNC					
0921.061.3.2.4	002	0000000035703	5	26870					1295	07	15	11	002	29		16-09-1976	580.0	6.0	016	DRI			UNK	98	UNC					
0921.061.3.2.4	003	0000000042053	1	32763					1295	07	15	11	003	29	BUNKER ROAD	03-06-1979	203.0	6.0	016	DRI	60.0	GPM	UNK	UNK	UNC	138-142				
0921.061.3.2.4	004	0000000042054	5	5790					1360	07	15	11	004	29	BUNKER SOUTH	04-06-1979	120.0	6.0	016	DRI	200.0	GPM	UNK	UNK	UNC	113-120				
0921.061.3.2.4	005	0000000042056	5	5790					1295	07	15	11	005	29		01-01-1978	271.0	6.0	UNK	DRI	40.0	USGM	240	UNK	UNC	262-271		Y		1401748
0921.061.3.2.4	006	0000000038824	7	24870					1295	07	15	11	006	29	YOUNG DUDD HWY 12N	10-07-1981	360.0	6.0	101	DRI	6.0	GPM	280	UNK	UNC	293-300				
0921.061.3.2.4	008	0000000040435	1	24870					1295	07	15	11	007	29	HWY 12		155.0	6.0	220	DRI			UNK	155	UNC					
0921.061.3.2.4	007	0000000000018	6	24870					1295	07	15	11	008	29		17-08-1977	155.0	6.0	048	DRI	1200.0	GPM	44	UNK	UNC					
0921.061.3.2.4	008	0000000037933	2	20212					1360	07	15	14	002	29		19-07-1977	120.0	6.0	048	DRI	30.0	GPM	28	UNK	UNC	120-120				
0921.061.3.2.4	009	0000000037704	2	24609					1360	07	15	14	003	29		22-06-1976	105.5	0.0	016	DRI	60.0	GPM	26	UNK	UNC					
0921.061.3.2.4	010	0000000034626	4	5790					1200	07	15	14	004	29	BUNKER RD	14-10-1977	84.0	6.0	048	DRI	22.0	GPM	27	UNK	UNC	76-82				
0921.061.3.2.4	011	0000000010192	B	21588					1295	07	15	16	005	29	BUNKER RD	24-06-1980	176.0	0.0	101	DRI	10.0	GPM	46	UNK	UNC	169-176				
0921.061.3.2.4	012	0000000044865	B	21588					1295	07	15	16	008	29	BUNKER RD	10-10-1984	375.0	0.0	101	UNK	3.0	GPM	308	375	UNC	367-373				
0921.061.3.2.4	001	0000000054169								07	15	21	001	29		19-08-1977	118.0	0.0	101	DRI	20.0	GPM	60	UNK	UNC					
0921.061.3.4.3	001	0000000037946	11	10886					7740	07	15	22	001	29		18-08-1977	83.0	0.0	101	DRI	20.0	GPM	60	UNK	UNC					
0921.061.3.4.3	002	0000000037934	2	10886					7740	07	15	22	002	29		27-09-1979	301.0	6.0	016	DRI			UNK	UNK	UNC					
0921.061.4.1.1	001	0000000043481								07	15	12	002	29	MCCARTHEYE FLAT 3KOI	13-11-1980	139.0	6.0	101	DRI	20.0	USGM	100	UNK	UNC	132-139				
0921.061.4.1.1	002	0000000046816	2	14601					1298	07	15	01	003	29		04-09-1983	430.0	6.0	101	UNK	3.0	GPM	641	434	RED					
0921.061.4.1.3	001	0000000052704							1296	07	15	12	001	29	AIRPORT	18-06-1980	360.0	0.0	101	DRI	15.0	GPM	UNK	UNK	RED					
0921.061.4.1.3	002	0000000044817	2	34281					1299	07	15	12	003	29	BUNKER RD	30-06-1985	417.0	6.0	101	UNK	10.0	GPM	UNK	UNK	UNC	387-417				
0921.061.4.1.3	003	0000000054684	2	34281					1299	07	15	12	004	29		19-03-1985	557.0	6.0	UNK	UNK	20.0	GPM	385	488	RED	494-553				
0921.061.4.1.3	004	0000000054599		34281					1298	07	15	12	005	29		05-11-1974	518.0	0.0	101	DRI			UNK	518	UNC					
0921.061.4.1.3	005	0000000036028							1297	07	15	13	002	29	MOUNTAIN SIDE	15-05-1980	280.0	6.0	101	DRI	5.0	GPM	210	UNK	UNC	231-280				
0921.061.4.1.3	006	0000000045055							1297	07	15	13	003	29		15-01-1987	170.0	6.0	101	DRI			UNK	UNK	UNC					
0921.061.4.1.3	007	0000000054852	3	34281					1299	00	00	00	000	29	MCK 126														

Lillooet
McCartney's
Flat 4

---------- END OF REPORT WELL4600 ----------

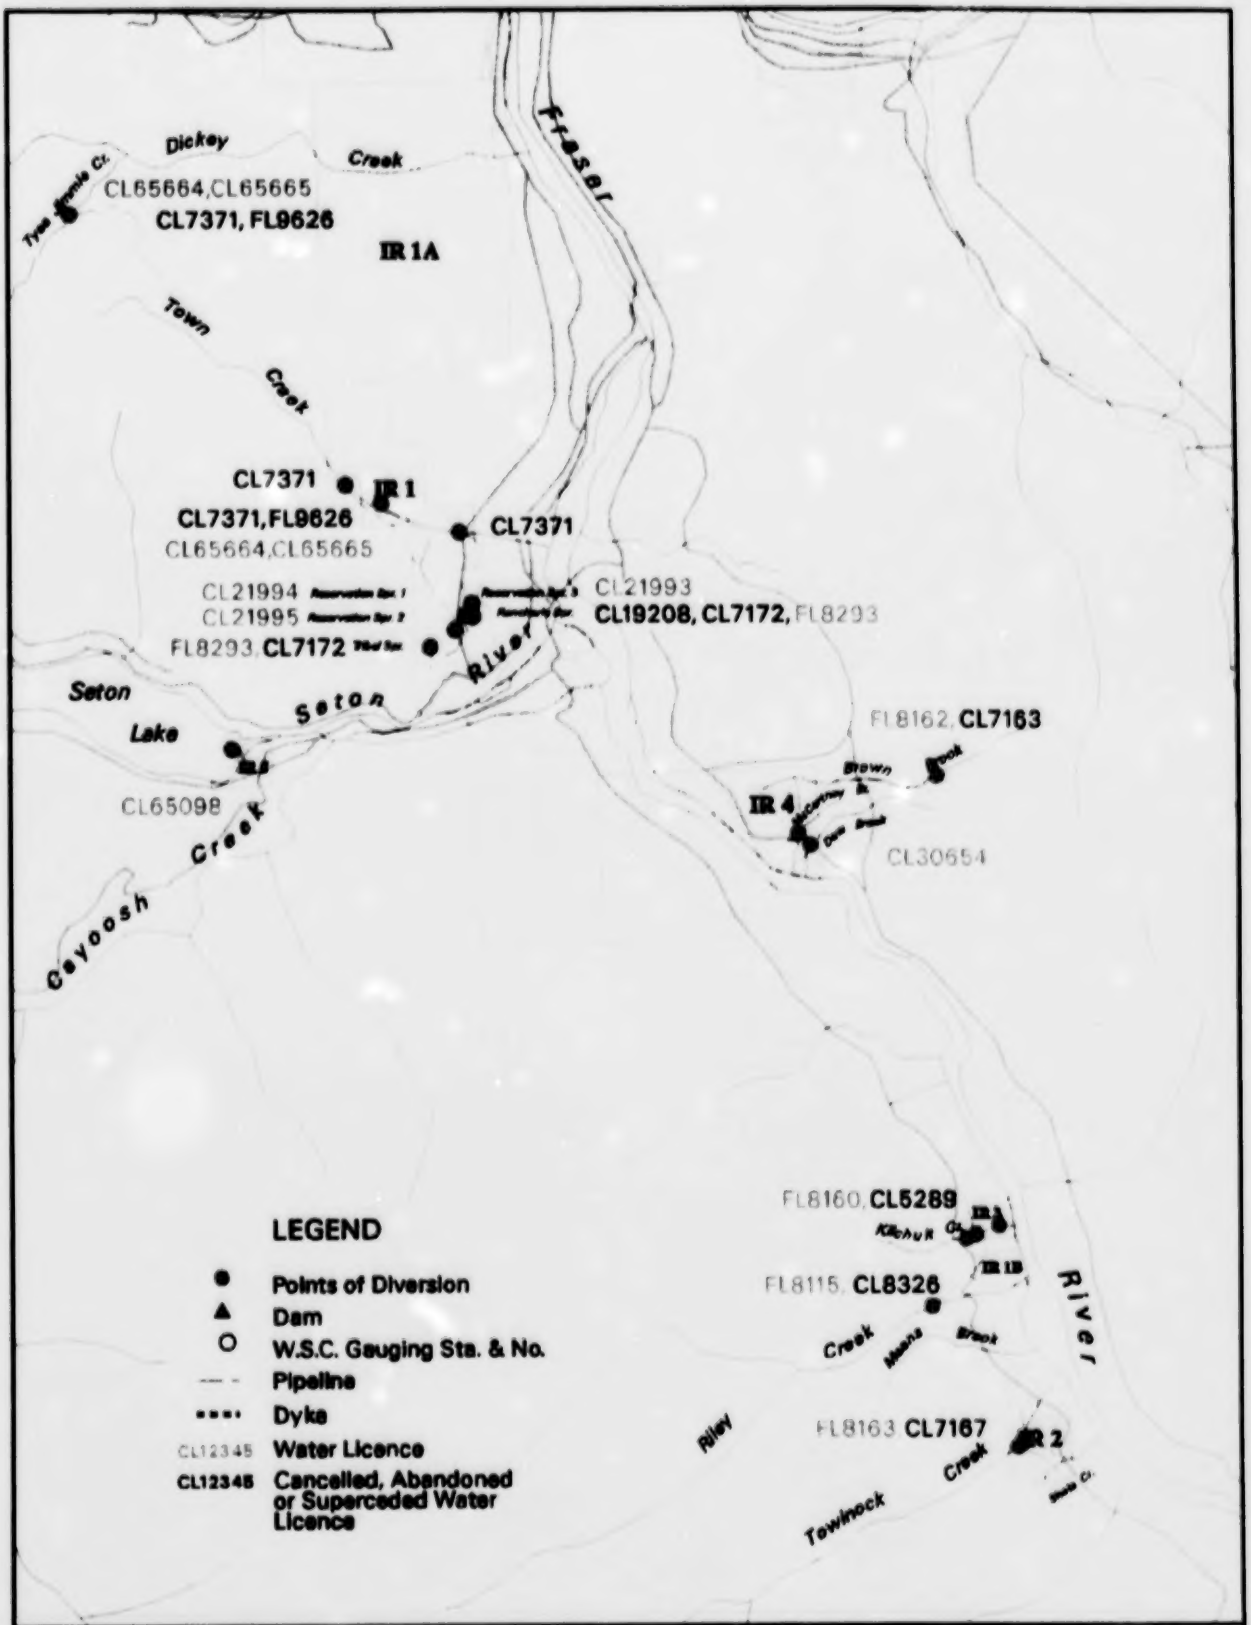

LILLOOET FIRST NATION

Scale: 1 : 85,000

Ministry of Environment, Lands & Parks | Date: October 1999 | Environment & Lands Division